

(800) 727-9957

(800) 727-9262 (213) 747-4500

(213) 747-3234



SPECIFICATION SHEET

PRODUCT #: CL-212-SS

Directional Lights

• 316 Marine Grade Stainless Steel

E-Mail: sales@coronalighting.com

Fixture Specifications:

Housing: Solid Stainless Steel.

ARCHITECTURAL GRADE SERIES

Finish: SS- Stainless Steel.

Lens: Clear and heat resistant convex glass.

Extra flat lens included.

Socket: Top grade ceramic bi-pin socket, with

retension clip.

Lamp: 12V, MR-16, 35W max.

Available in LED (3.5W & 5W) or without lamp. See the Lamp Guide below for more information.

Wiring: Fixture is prewired with a 3-ft 18-2 SPT2-W direct

> burial cord. Wire connector sold seperately. Silicone filled wire nut (CX-854) is available from Corona

Lighting.

Gasket: Silicone "O" ring seals face plate to housing providing weather tight protection.

Yoke: Stainless steel yoke with 1/2" NPT bushing for

afixing mounting spike.

Mounting Spike: 8" Stainless steel mounting spike with 1/2" NPT

threaded female hub.

Electrical Notes: A remote 12V transformer is required. Options are

available from Corona Lighting.


Voltage range for LED lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing against

manufacturer's defects.







AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer'	defects)
---	----------

		BEAM		_ COLOR &	RATED	HALOGEN	
LAMP NUMBER	WATTS	SPREAD	LUMEN	TEMP.	HOURS	EQUIVALENT	
L-ED16-3W-SP	3.5	15° Spot	270	2700K	50,000	25 Watt	
L-ED16-3W-FL	3.5	45° Flood	270	2700K	50,000	25 Watt	
L-ED16-3W-WF	3.5	60° Wide Flood	270	2700K	50,000	25 Watt	
L-ED16-5W-SP	5	15° Spot	350	2700K	50,000	40 Watt	
L-ED16-5W-FL	5	45° Flood	350	2700K	50,000	40 Watt	
L-ED16-5W-WF	5	60° Wide Flood	350	2700K	50,000	40 Watt	
L-ED16-COB5W-SP	5	15° Spot	450	2700K	50,000	50 Watt	
L-ED16-COB5W-FL	5	38° Flood	450	2700K	50,000	50 Watt	
L-ED16-COB5W-WF	5	60° Wide Flood	450	2700K	50,000	50 Watt	
L-ED16-COB5W-SP3K	5	15° Spot	470	3000K	50,000	50 Watt	
L-ED16-COB5W-FL3K	5	38° Flood	470	3000K	50,000	50 Watt	
L-ED16-COB5W-WF3K	5	60° Wide Flood	470	3000K	50,000	50 Watt	
Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET							

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

- wattage - lamp angle CL - 212-SS - L-ED16 - 5W -

Example: CL-212-SS-L-ED16-5W-FL FL

Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.

ARCHITECTURAL GRADE SERIES

ACCESSORIES SHEET

1633 Staunton Ave Los Angeles, CA 90021

TEL. FAX. (800) 727-9262 (800) 727-9957 (213) 747-4500 (213) 747-3234

E-Mail: sales@coronalighting.com

•Directional Lights

• 316 Marine Grade Stainless Steel

Mounting Pedestals

CX-601-BK 1" PVC Mounting Pedestal, ½" NPT, Black

PRODUCT #: CL-212-SS


CX-601-VG 1" PVC Mounting Pedestal, ½" NPT, Verde Green

CX-603-BK 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub

on top, Black

CX-603-VG 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub

on top, Verde Green



CX-603-BK

CX-621-BK 1" PVC Cap, ½" NPT, Black

CX-621-VG 1" PVC Cap, 1/2" NPT, Verde Green

CX-622-BK 2" PVC Cap, ½" NPT, Black

CX-622-VG 2" PVC Cap, 1/2" NPT, Verde Green

CX-624-BK 3" PVC Cap, ½" NPT Female Brass Hub, Black

CX-624-VG $\,\,$ 3" PVC Cap, $\frac{1}{2}$ " NPT Female Brass Hub, **Verde Green**


Ground Spikes

CX-646-SS 8" ABS Spike, ½" NPT, Stainless Steel



Mounting Canopies

CX-705B-SI Brass Flat Canopy, ½ NPT, Silver Plated
CX-709B-SI Brass Raised Canopy, ½ NPT, Silver Plated

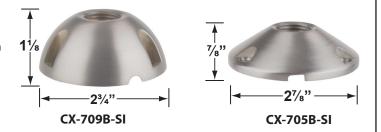

Special Lenses & Honeycomb Louvers

CX-238 MR-16 Snap-on holder, Silver Plated CX-239 MR-16 honeycomb louver, Black CX-240-AM MR-16 color lens, Amber CX-240-BL MR-16 color lens. Blue CX-240-GR MR-16 color lens, Green CX-240-RD MR-16 color lens, Red CX-240-YL MR-16 color lens, Yellow CX-241 MR-16 lens, Linear Spread CX-242 MR-16 lens, Frosted

• For MR-16 Lenses and Louvers, you will need the CX-238

MR-16 lens, Prismatic

CX-243

Cable Connectors

CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**

CX-858 Speedy Cable Connector, Supply Cable up to 10-2, Black

