


## ECV60-12DC-UD

**Class 2 Electronic UNIV 5 in 1 dimming**  
Outdoor Black Powder Coated Steel Enclosure  
Single Circuit: **12VDC 4kHz PWM or Linear**  
Total Wattage: **60W max**  
Input Voltage: **100-277V 50/60Hz**



Conforms to UL STD. 8750  
Certified to CSA  
STD. C22.2 No 250.0

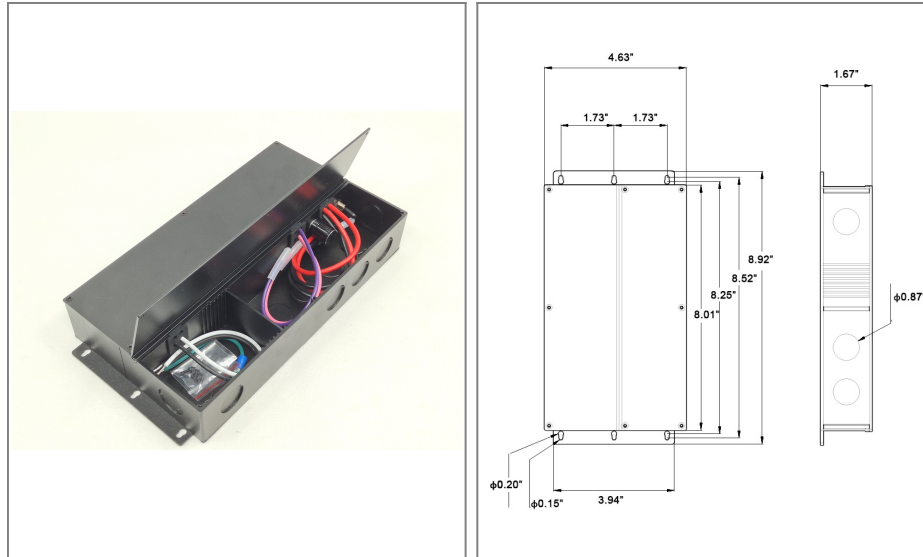

### Transformer


Dimmable with triac forward and reverse phase, 0/1-10V , resistor, PWM  
Input leads are 18AWG 600V  
Output leads are 18AWG 300V  
Leads max. operational temperature is 105°C

### Housing

The actual transformer 60W is encapsulated in the enclosure  
The enclosure is Black Powder Coated Steel, NEMA 4X rated  
Wiring compartment has 8 knockouts sizes for 3/8 inch screw cable connectors  
Enclosure Temperature does not exceed 70°C at 45°C ambient and fully loaded  
Dimensions (inch): H = 8.92, W = 4.63, D = 1.67  
Weight (LBs): 2.4

### Electrical Parameters

|                                  |                         |
|----------------------------------|-------------------------|
| Input Voltage:                   | <b>100-277V 50/60Hz</b> |
| Max. input current at full load: | <b>0.9A</b>             |
| Output voltage without load:     | <b>12.1VDC</b>          |
| Output voltage fully loaded:     | <b>12VDC</b>            |
| Max. Total Wattage:              | <b>60W</b>              |
| Max. Output Current:             | <b>5A</b>               |
| Efficiency:                      | <b>85%</b>              |
| Load regulation:                 | <b>0.5%</b>             |

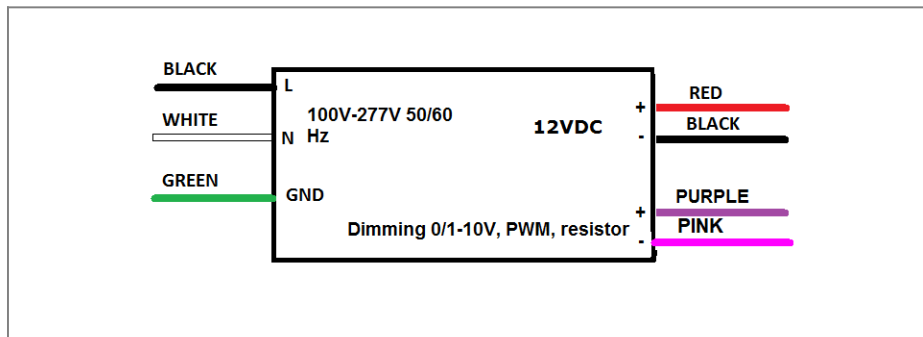

**Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309**  
**Fax: 818 904 3327 info@emcod.com techsupport@emcod.com**