


# 24"x24" Sky Panel™ XL with 5-CCT Switch

Designed to be surface-mounted with no additional accessories, recessed with ELSPRM accessory or pendant mounted with ELSPRM + ELSPDP. Edge-Lit LED Technology with glare control lens for even glow.

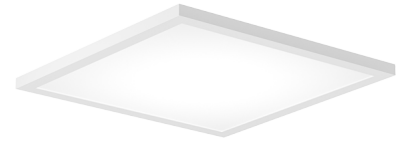


## Features

- Fits 3 1/2" and 4" Octagon and Round Junction Boxes
- Switch to desire CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- Dimmable to 10% with select dimmers
- Edge-lit LED technology with glare control lens
- Can be recessed in T-bar/Grid ceilings (ELSPRM junction box required)
- IC Rated
- Damp Location Rated
- ETL Listed, Energy Star Compliant

## Specifications

<b>Wattage</b>	40W
<b>Lumens</b>	4000 lm
<b>Voltage</b>	120V
<b>Color Temp.</b>	2700K, 3000K, 3500K, 4000K, 5000K
<b>Dimmable</b>	Triac/ELV
<b>Lamp Type</b>	LED
<b>CRI</b>	90+
<b>Damp Location</b>	Listed

## Dimensions



## Technical Details

**Optics:** Frosted polycarbonate diffuses light evenly throughout while reducing glare with LED technology.

**Installation:** Designed to be surface-mounted with no additional accessories. Recessed Mounting with ELSPRM accessory or pendant mounted with ELSPRM + ELSPDP.



**LED Technology:** Extremely accurate Color Rendering Index of 90+. Instant-On to full brightness technology. No LED pixilation.

**Listings:** cUL Listed for Damp Locations. Energy Star Compliant.

**Warranty:** ELCO Products are built to last with a 5-year Limited Warranty.

## Product Numbers

Item	Lamp type	Lumens	CCT	Watts	Voltage	Dimming	Finish
<b>ELSP2424CT5W</b>	LED	4000 lm	2700K, 3000K, 3500K, 4000K, 5000K	40W	120V	Triac/ELV	All White

**Product Number Builder** Example: **ELSP2424CT5W**

---

24"x24" Sky Panel™

Color Temperature

Finish

**ELSP2424**

**CT5** 2700K - 5000K


**W** All White

# Photometric Report

## 24" x 24" Sky Panel™ with 3-CCT Switch Round Sky Panel™

### PHOTOMETRIC REPORT

Product #: ELSP2424CT3 @3000K  
 Wattage / Lumens: 40W / 3391.2 lm  
 Luminaire LPW: 84.7 lm/W



### CANDLE POWER SUMMARY

Degree Vertical	0°
0	1078
5	1074
15	1039
25	975
35	883
45	763
55	621
65	457
75	281
85	104
90	17

### ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Center Beam Footcandles	Beam Diameter
4'	67.4	13.8'
6'	29.9	20.7'
8'	16.8	27.6'
10'	10.8	34.5'

### ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	848.5	25
0-40°	1,405.2	41.4
0-60°	2,556.8	75.4
0-90°	3,390.0	100



**ELCO Lighting**

# Dimmer Compatibility Chart

## Sky Panels™ XL with CCT Switch

For ELSP1224, ELSP1248, ELSP2424, ELSP2448

### For Reference Only

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

Manufacturer	Product	Part Number	Dimmed Light Output Range
Lutron	Toggler, 120V AC, 60Hz, 600W Incandescent/Halogen, Single Pole, 3-Way	TG-600PH	10% - 100%
	Toggler, 120V AC, 60Hz, 400W Incandescent/Halogen, Single Pole, 3-Way	TGCL-153P	10% - 100%
	Diva, 120V AC, 60Hz, 600W Incandescent/Halogen, Single Pole, 3-Way	DV-600PR	10% - 100%
	Diva, 120V, 60Hz, 150W LED/CFL, 600W Incandescent/Halogen, Single Pole, 3-Way, Indoor Application	DVCL-153P	10% - 100%
	Maestro, 120V, 50/60Hz, 150W LED/CFL, 600W Incandescent/Halogen, Single Pole, 3-Way, Indoor Application	MACL-153M	10% - 100%
	Skylark, 120V, 60Hz, 150W LED/CFL, 600W Incandescent/Halogen, Single Pole, 3-Way, Indoor Application	CTCL-153P	10% - 100%
	Caseta Wireless, 120V AC, 50/60Hz, 150W LED/CFL, 600W Incandescent/Halogen, Single Pole, 3-Way	PD-6WCL	10% - 100%
Leviton	SureSlide, 120V AC, 60Hz, 150W LED/CFL, 600W Incandescent, Single Pole, 3-Way, Commercial Application	6674	10% - 100%
	SureSlide, 120V AC, 60Hz, 150W LED/CFL, 600W Incandescent, Single Pole, 3-Way, Indoor Application	6672-1LW	10% - 100%

**\*NOTE: Refer to dimmer manufacturer’s documentation for installation instructions and circuit details**

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.

Integrating our lighting with your Smart Home System is a breeze. Simply check your Smart Home system for compatible smart switches and cross reference that with our Dimming Compatibility Chart. Once the switches are integrated with your Smart Home system your lights will be ready to go.



2042 E. Vernon Ave. Vernon CA 90058 Tel 323.231.2600 Fax 323.231.3200 elcolighting.com