


# 4" Square Sky Panel™

Edge-Lit LED Technology with glare control lens for even glow

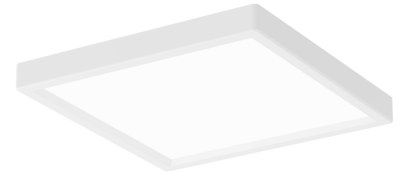

## Features

- Fits 3", 3 1/2" and 4" Octagon and Round junction boxes
- Fits 4" housings with optional [ELSPMNT468](#) mounting accessories
- Dimmable to 10% with select dimmers
- Edge-lit LED technology
- IC Rated and Wet Location Rated
- JA8 2022 E-Compliant
- ETL Listed
- 4 3/8" Sq. x 5/8" H

## Specifications

<b>Wattage</b>	10W
<b>Lumens</b>	600 lm - 650 lm
<b>Voltage</b>	120V
<b>Color Temp.</b>	2700K, 3000K, 3500K, 4000K, 5000K - 4000K
<b>Dimmable</b>	Triac/ELV
<b>Lamp Type</b>	LED
<b>CRI</b>	90+
<b>Wet Location</b>	Listed

## Options




White



Black

## Dimensions



## Product Numbers

Item	Lamp type	Lumens	CCT	Watts	Voltage	Dimming	Finish
<b>ELSP4430W</b>	LED	600 lm	3000K	10W	120V	Triac/ELV	All White
<b>ELSP4430B</b>	LED	600 lm	3000K	10W	120V	Triac/ELV	All Black
<b>ELSP4440W</b>	LED	650 lm	4000K	10W	120V	Triac/ELV	All White
<b>ELSP4440B</b>	LED	650 lm	4000K	10W	120V	Triac/ELV	All Black
<b>ELSP44CT5W</b>	LED	600 lm	2700K, 3000K, 3500K, 4000K, 5000K	10W	120V		All White

# Product Number Builder Example: ELSP4430W

4" Square Sky Panel™

Color Temp

Finish

**ELSP44**

**30** 3000K  
**40** 4000K  
**CT5** 2700K - 5000K


**W** All White  
**B** All Black

## 4" Square Sky Panel

Multiplier: 4000K (x 1.08)

### PHOTOMETRIC REPORT

Product #: ELSP4430  
 Wattage/Lumens: 9.4W/ 468 lm  
 Luminaire LPW: 50 Lm/W

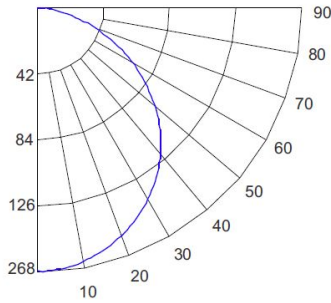

### CANDLE POWER SUMMARY

Degrees Vertical	0°
0	168
5	167
15	161
25	151
35	135
45	114
55	89
65	60
75	31
85	5
90	0

### ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	10.5	11.6'
6'	4.65	17.4'
8'	2.62	23.1'
10'	1.68	28.9'

### ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30°	130.35	27.80
0-40°	213.81	45.60
0-60°	377.41	80.60
0-90°	468.49	100.00