


Mini LED Step Light

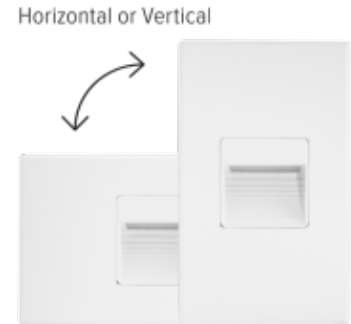

Features

- Adaptive Diecast Aluminum faceplate design allows for Vertical or Horizontal orientation.
- Powder Coated Faceplate
- Vertical or Horizontal Mounting
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor use
- IC Rated for direct contact with insulation
- Mounts in a standard single gang box
- Life span of 50,000 hours L70
- Input Voltage: 120V


Specifications

Wattage	2.5W
Lumens	50 lm
Voltage	120V
Color Temp.	3000K
Lamp Type	LED
CRI	90+


Options



White



Black



Bronze



Nickel

Technical Details

Optics: Frosted lens diffuses light and illuminates walkway.

Construction: Diecast Faceplate with smooth powder coat finish. LED board and driver integrated in housing. Security screws for mounting faceplate to box included.

Installation: Easily installs into a standard single gang switch box.

Electrical:


- Ambient operating temperature -23°F (-5°C) to 113°F (45°C).
- 120V ELST95: Driver input of 120V 50/60Hz connects directly to line voltage power.
- 12V ELST91: Input of 12V requires an external transformer.

LED Technology:

- 90+ CRI for extremely accurate color rendering.
- Lumen Maintenance of 50,000 hours L70 Life.
- LED Array.

Listings: cETLus listed for Wet Location.

Dimensions



Product Numbers

Item	Lamp type	Lumens	CCT	Watts	Voltage	Finish
ELST9930W	LED	50 lm	3000K	2.5W	120V	White
ELST9930B	LED	50 lm	3000K	2.5W	120V	Black
ELST9930N	LED	50 lm	3000K	2.5W	120V	Nickel
ELST9930BZ	LED	50 lm	3000K	2.5W	120V	Bronze

Product Number Builder

Example: **ELST9930W**

Indoor Mini LED Step Light

ELST99

Color Temp.

30 3000K

Finish

W White
B Black
BZ Bronze
N Nickel