



PROJECT	DATE
TYPE	CATALOG #

E.T. WALL WASHER


FL-113B

KEY FEATURES

- CAST BRASS
- NATURAL BRONZE FINISH GUARANTEED NOT TO CHIP, FLAKE OR PEEL
- TEMPERED, SHOCK AND HEAT RESISTENT LENS
- HIGH TEMPERATURE CERAMIC SOCKET
- FIELD REPLACEABLE LED LAMP

PRODUCT SPECIFICATIONS

MATERIAL	CAST BRASS
LENS	CLEAR AND FROST INCLUDED
SOCKET	BI PIN
LAMP	T3/G4
VOLTAGE	9-18V AC/DC
PROJECTION	4 FT X 8 FT @ 4 FT PLACEMENT
LEAD WIRE	3 FT

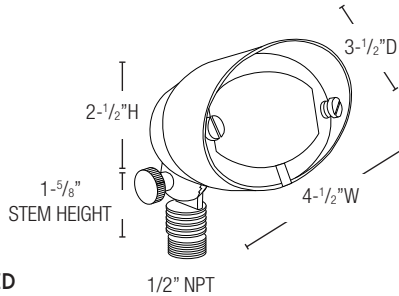

ETL LISTED
COMPLIES WITH UL1838

STEP 1

FIXTURE CONFIGURATION



STEP 3

ACCESSORY OPTIONS



STAKE OPTION

- AX-800P STANDARD SLOTTED STAKE
- AX-802P HEAVY DUTY PERMA POST


SURFACE/TREE MOUNT OPTION

- AX-803B DEEP ROUND BASE (NBZ)
- AX-804B ROUND BASE (NBZ)

+ See accessory spec sheet for additional mounting options

STEP 2

LED LAMP CONFIGURATION

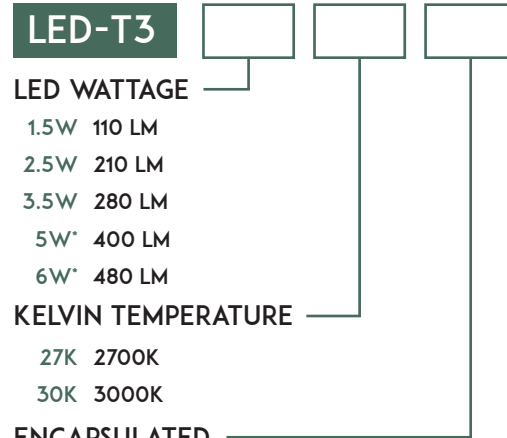

LED WATTAGE

- 1.5W 110 LM
- 2.5W 210 LM
- 3.5W 280 LM
- 5W* 400 LM
- 6W* 480 LM

KELVIN TEMPERATURE

- 27K 2700K
- 30K 3000K

ENCAPSULATED

- ENC ENCAPSULATED (IP67)
- ONLY AVAILABLE IN 1.5W, 2.5W & 3.5W

+ Dimmable: See Encapsulated T3 LED Lamps Spec Sheet for additional details (1.5w, 2.5w, 3.5w only)

* 5w & 6w: Available in Non-Encapsulated - 3000K only (Non-Dimmable)