




•FLAT SHROUD
•STAINLESS STEEL FINISH
(ALSO AVAILABLE IN NATURAL BRONZE FINISH)




ETL LISTED
COMPLIES
WITH UL1838

•ANGLED SHROUD
•NATURAL BRONZE FINISH
(ALSO AVAILABLE IN STAINLESS STEEL FINISH)



ANGLED SHROUD (A)



FLAT SHROUD (F)

PROJECT	DATE
TYPE	CATALOG #

ARCHITECT SPECIFIER

BRASS FL-501B

KEY FEATURES


- CONTEMPORARY DESIGN
- SOLID BRASS
- NATURAL BRONZE OR STAINLESS STEEL FINISH OPTIONS
- TEMPERED, SHOCK AND HEAT RESISTENT LENS
- HIGH TEMPERATURE CERAMIC SOCKET
- FIELD REPLACEABLE LED LAMP

PRODUCT SPECIFICATIONS

DIMENSIONS	4- ³ / ₄ "H X 2- ¹ / ₈ "W
MATERIAL	SOLID BRASS
LENS	CLEAR FLAT TEMPERED
SOCKET	BI PIN
LAMP	MR16
VOLTAGE	9-15V AC/DC
PROJECTION	UP TO 50 FT


STEP 1

FIXTURE CONFIGURATION

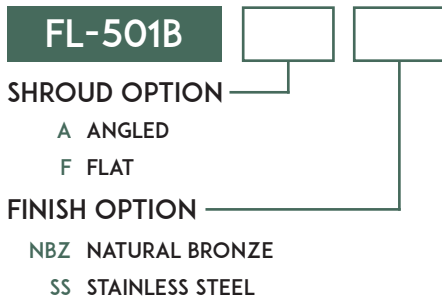

STEP 3


ACCESSORY OPTIONS

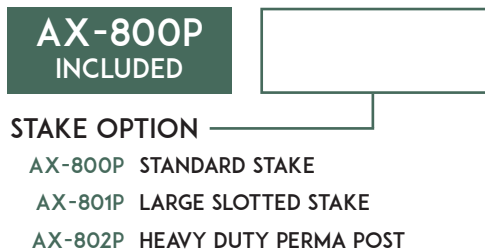

+ See accessory spec sheet for additional mounting options
++ Complimentary Path Light Series (PS-501B) also available

STEP 2

LED LAMP CONFIGURATION

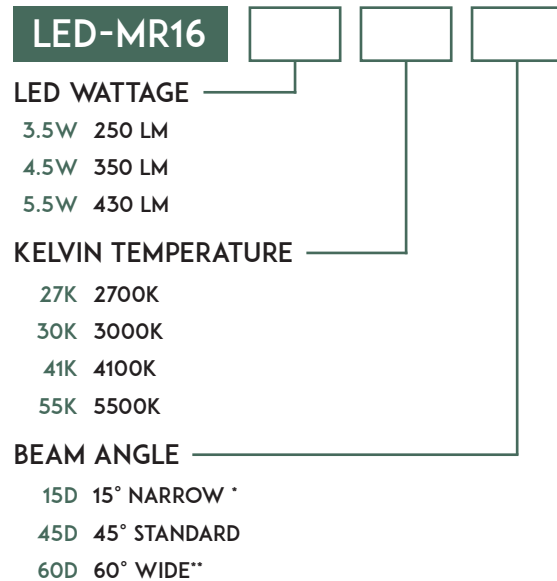

* 15° Only available in 3.5 & 5.5w - 3000k
** 60° Available in 3.5w, 4.5w, 5.5w, 2700k or 3000k

+ Consult factory for additional options