



# LED PATH LIGHTS PL-01-LEDP SERIES



TYPE

## SPECIFICATIONS

**CONSTRUCTION:** Cast aluminum or cast brass China Hat; matching extruded aluminum or brass stanchion

**LIGHT SOURCE:** 12v, 4w, 300 lumen integrated round LED flat panel, warm white 3000K; optional cool white 5200K 320 lumen available (modify part number to LEDP52)

**LIFETIME RATING:** 50,000 Hours

**12v EXTERNAL DRIVER:** 4w 350mA output, 12v AC input. Voltage range of 9 to 18 volts with optimum operating range of 10 to 15 volts for consistent performance and brightness. For use with magnetic transformers only.

**SOCKET:** None- LED is hard wired inside fixture

**LENS:** Clear acrylic (standard) Optional sand blast (-SB) or White (-WHT) available

**WIRING:** Black 3 foot 18/2 zip cord from base of fixture (12v only)


For 25 foot 16/2 fixture lead wire add -25F to catalog number.  
120v standard wiring

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only


**MOUNTING:** FA-03 black 9" ABS stake, tapped 1/2" NPS

**FINISH:** Aluminum - Black texture polyester powder coat. Optional finishes available  
Brass - Unfinished brass. Optional finishes available

**NOTE:** Optional 120v to 277v drivers available. Must use FA-26 mounting post or junction box

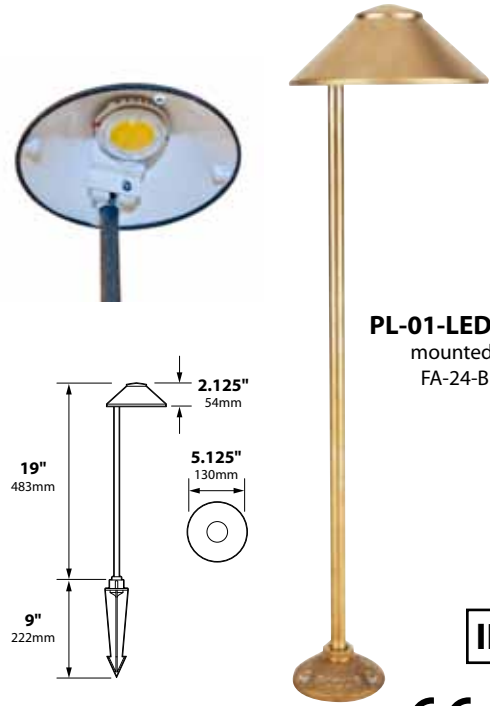

**PL-01-LEDP-BRS**  
mounted on  
FA-24-BRS



IP54



## ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL-01LEDP-BLT	Cast Aluminum 5.5" China Hat	4w Round LED Panel	2.0 lbs.
PL-01LEDP-BRS	Cast Brass 5.5" China Hat	4w Round LED Panel	3.0 lbs.

## MOUNTING ACCESSORIES

FA-03-RX/-BRS: 7.00" 178mm, 2" 51mm

FA-03-LG: 9.00" 229mm, 3" 76mm

FA-24-BRS: 0.9" 23mm, 3" 76mm

FA-22-CST/-BRS FA-22/-BRS: 3.5" 89mm, 1.125" 28mm, 5.75" 146mm

FA-24-MD-CST/-BRS: 2.65" 67mm, 1.4" 36mm

FA-24-LG-CST /-BRS FA-24-LG-SPUN /-BRS: 4.75" 121mm, 0.875" 22mm

FA-24-MD-CST-PC/-BRS: 2.65" 67mm, 1.4" 36mm

FA-01-BRS: 15" 381mm, 1.63" 41mm

FA-24-MD-CST-POST/-BRS FA-24-MD-CST-POST2/-BRS (telescopic): 13" 330mm, 16" 406mm, Telescopic to 26"

C/FA-25/-26/BRS: 20" 508mm, 3" 76mm


FA-30-4: 4" 102mm

FA-30-8: 8" 203mm

STEM EXTENSIONS: FA-30 FA-31 FA-32 FA-33 FA-34 -BRS = Brass Models (Arrow: couplers)

- FA-30: 10" 254mm
- FA-31: 13" 330mm
- FA-32: 16" 406mm
- FA-33: 21" 533mm
- FA-34: 26" 660mm

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS



### PL-01

Half Spread Photometrics  
12 ft. (3.7 m) diameter

## JOB INFORMATION

Type: \_\_\_\_\_ Date: \_\_\_\_\_

Job Name: \_\_\_\_\_

Cat. No.: \_\_\_\_\_

Lamp(s): \_\_\_\_\_

Specifier: \_\_\_\_\_

Contractor: \_\_\_\_\_

Notes: \_\_\_\_\_

FOCUS INDUSTRIES INC.  
25301 COMMERCENTRE DRIVE  
LAKE FOREST, CA 92630

www.focusindustries.com  
sales@focusindustries.com  
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT