

## KT-EM-TP1-XXWL-SU EMERGENCY LIGHT

### DESCRIPTION

Emergency Light | Dual Heads |

White or Black Finish | 6500K White Light | Surface Mount |

Battery Backup | Built-in Test Switch | 120-277V Input

### APPLICATION

UL 924 Compliant Emergency Light Rated for Damp Locations. Provides 90 Minutes of Emergency Power.



### PRODUCT FEATURES



- 6500K White Light Dual Heads
- Surface Mount - Back
- Integrated Backup Battery - NiCad 1000mAh
- 90 Minutes of Emergency Power
- Integrated Test Switch & Charge Indicator
- Thermoplastic Housing - UL 94 5VA Flame Rating
- Ambient Operating Temperature: 0°C/32°F to 40°C/104°F
- UL Certified for Damp Locations
- Universal J-Box Mounting Pattern

### PERFORMANCE SPECIFICATIONS

| Catalog Number    | Input Voltage | Input Power | CCT   | Lumens | Housing Color | Mounting            | Battery Type   | Battery Capacity | Recharge Time | Remote Capable |
|-------------------|---------------|-------------|-------|--------|---------------|---------------------|----------------|------------------|---------------|----------------|
| KT-EM-TP1-WHXL-SU | 120-277V      | 1.5W        | 6500K | 200    | White         | Surface: Back Mount | Nickel-Cadmium | 1000mAh          | 24 Hours      | No             |
| KT-EM-TP1-BLXL-SU |               |             |       |        | Black         |                     |                |                  |               |                |

\* See Ordering Information and Catalog Number Breakdown for more details.

### PHYSICAL SPECIFICATIONS

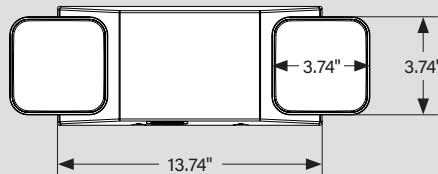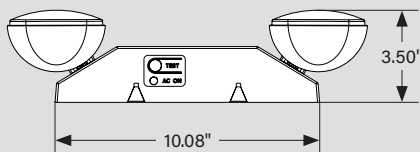


#### Weight


| Fixture Weight | Carton Weight |
|----------------|---------------|
| 1.3 lbs        | 10.5 lbs      |

# KT-EM-TP1-XXWL-SU

## EMERGENCY LIGHT

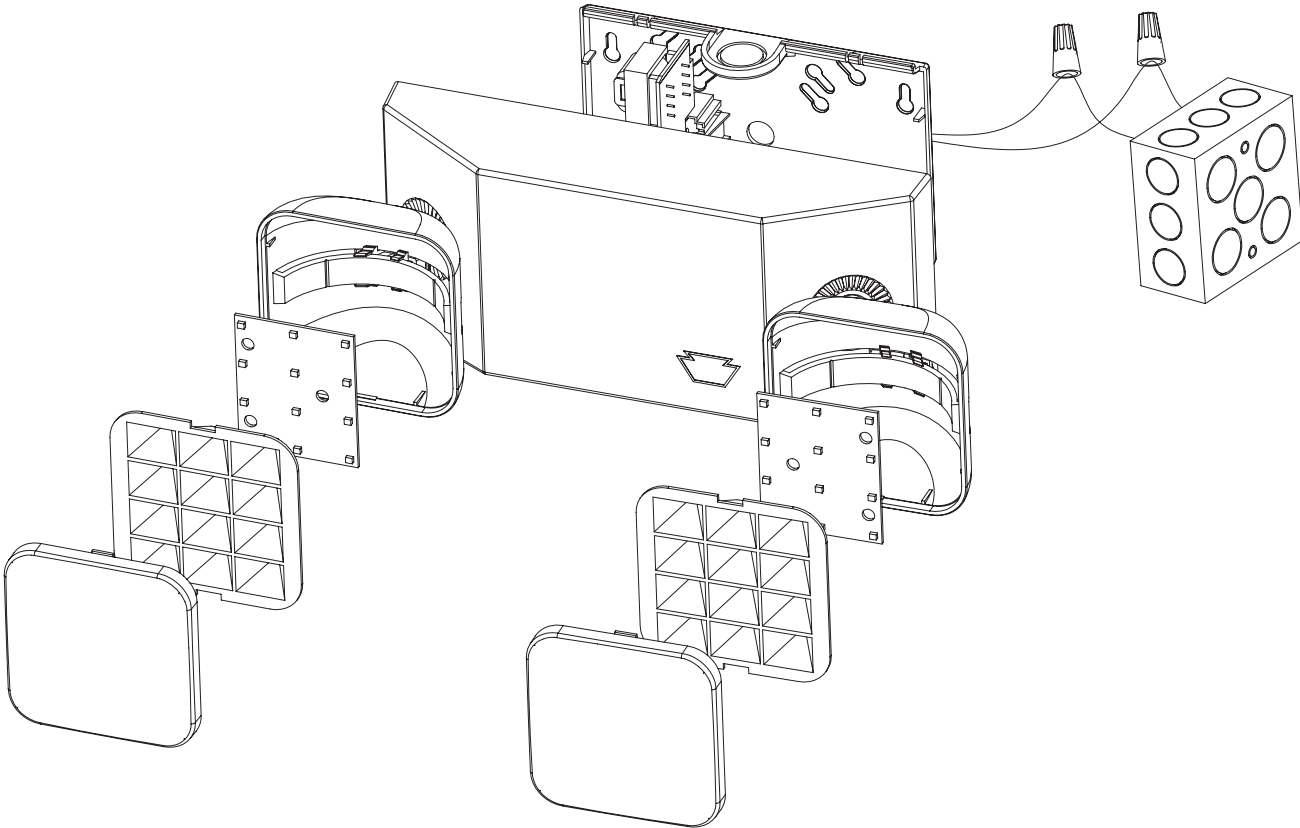

### SPACING GUIDELINES

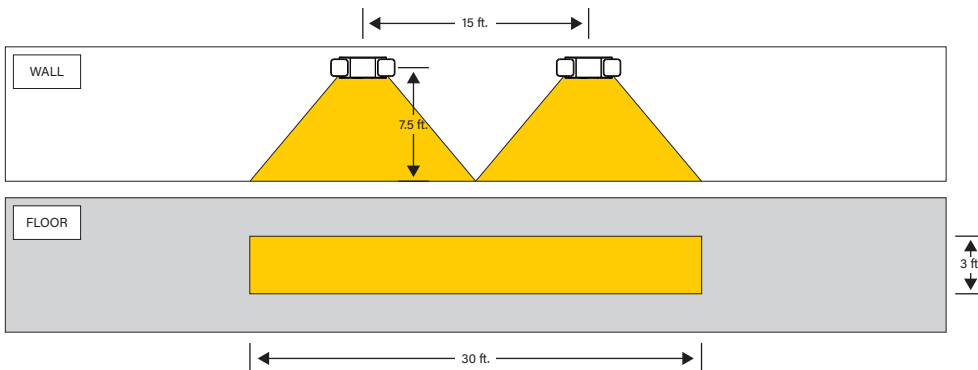

| Multiple Unit Spacing |                            |
|-----------------------|----------------------------|
| Room Description      | 100' x 8' x 12' Hallway    |
| Head Orientation      | 45° Rotation, 50° Tilt     |
| Path of Egress        | 3' Wide                    |
| Illumination          | 1fc average, 0.1fc minimum |



**SMART//SAFE®**

# KT-EM-TP1-XXWL-SU

EMERGENCY LIGHT

ORDERING INFORMATION

| Catalog Number    | Finish | UPC          | Easy Code |
|-------------------|--------|--------------|-----------|
| KT-EM-TP1-WHWL-SU | White  | 843654169231 | TLE-42    |
| KT-EM-TP1-BLWL-SU | Black  | 843654169248 | HRL-96    |

CATALOG NUMBER BREAKDOWN

# KT-EM-TP1-XXWL-SU

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8

- 1 Keystone Technologies
- 2 Emergency Light
- 3 Thermo Plastic
- 4 Form Factor 1
- 5 Housing Color
- 6 Light Color
- 7 Mounting
- 8 Input Voltage

5 Housing Color

|    |       |
|----|-------|
| WH | White |
| BL | Black |

6 Light Color

|    |             |
|----|-------------|
| WL | White Light |
|----|-------------|

7 Mounting

|   |               |
|---|---------------|
| S | Surface Mount |
|---|---------------|

8 Input Voltage

|   |          |
|---|----------|
| U | 120-277V |
|---|----------|