

ETL LISTED
COMPLIES WITH
UL1838

| | |
|---------|-----------|
| PROJECT | DATE |
| TYPE | CATALOG # |

20W COHIBA POWER FLOOD

LED-FL-115B-20W

KEY FEATURES


- INTEGRATED LED WITH HIGH LUMEN OUTPUT
- QUICK CHANGE LED TECHNOLOGY ALLOWS FOR EASY REPLACEMENT OF LED BOARD IN THE FIELD
- DIMMABLE*
- HEAVY CAST BRASS
- NATURAL BRONZE FINISH GUARANTEED NOT TO CHIP, FLAKE OR PEEL
- TEMPERED PRISMATIC LENS

PRODUCT SPECIFICATIONS

| | |
|-------------------|-------------------------|
| DIMENSIONS | 4"H X 5-1/4"W X 5-3/4"D |
| MATERIAL | CAST BRASS |
| LENS | TEMPERED PRISMATIC LENS |
| LED | 20W SMD |
| LUMENS | 1050 |
| VOLTAGE | 11-13V AC/DC |
| PROJECTION | UP TO 50 FT |

STEP 1

FIXTURE CONFIGURATION

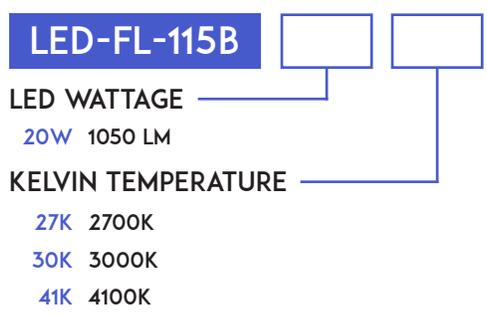

STEP 2

ACCESSORY OPTIONS



+ See ACCESSORY SPEC SHEET for additional mounting options

*PRIMARY SIDE DIMMING: Requires LED magnetic low voltage (MLV) or LED electronic low voltage (ELV) dimmable transformer and compatible LED dimmer (MLV or ELV) For more information see installation guidelines
+ Fully tested with Lutron Diva (DVLV-600P) dimmer and Lightcraft dimmable transformers



| | |
|---------|-----------|
| PROJECT | DATE |
| TYPE | CATALOG # |

FEATURES



QUICK CHANGE TECHNOLOGY

QUICK DISCONNECT ALLOWS FOR EASY REPLACEMENT OF LED BOARD



REMOVE THESE 4 SCREWS TO RELEASE THE LED BOARD

See LED-FL-115B INSTALLATION SHEET for full detailed installation instructions.