


LH7R - REMODEL E26 HOUSING 6" LINE VOLTAGE HOUSINGS



Standard: 75W PAR30/R30, 150W PAR38, 50W PAR16/PAR20, 100W A19
IC: 75W R30/PAR30, 40W A19, 50W PAR16/R20/PAR2

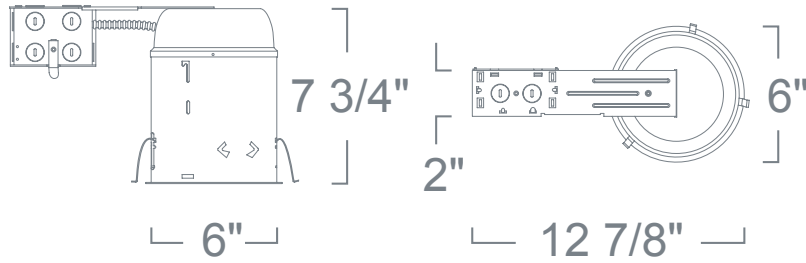

SPECIFICATION

120V 150W Max R30/PAR30/PAR38/
A19 MED E26

Application: General purpose recessed downlight housing for medium to high ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with 3/4", 1" and Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non IC rated housing must be kept 3" from insulation. IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loose fill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: UL Listed, cETL Listed

COMPATIBILITY

 LR30 GIMBAL RING	 LR38 REGRESSED EYEBALL W/ BAFFLE	 LRS105 WALL WASH W/ REFLECTOR BAFFLE
 LRS95 WALL WASH W/ REFLECTOR	 LCMPD7Q SQUARE 7" LUMEN PAD - 1100LM	 LKDC312 12 X DIMMABLE PUCK LIGHT DRIVER
 LR16 SHOWER TRIM W/ OPAL LENS	 LR48 ADJUSTABLE EYEBALL W/ BAFFLE	 LRLD678 6" ADJUSTABLE GIMBAL LED RETROFIT (650 LUMEN)
 LREBLDQ5602 5" & 6" SQUARE LED (1100LM)	 LR17 ADJUSTABLE EYEBALL W/ BAFFLE	 LR381 DECO GLASS REFLECTOR
 LR419 REGRESSED EYEBALL W/ REFLECTOR	 LR45 WALL WASH W/ BAFFLE	 LRA42 PRISMATIC GLASS LENS W/ REFLECTOR

Please see website for more compatible items.

FEATURE:



LH7R **RATING**
LH7R **ICA**:IC-Airtight

ORDERING EXAMPLE : LH7RICA

ID#: 3