


## LH99R - REMODEL E26 HOUSING

### 4" LINE VOLTAGE HOUSINGS

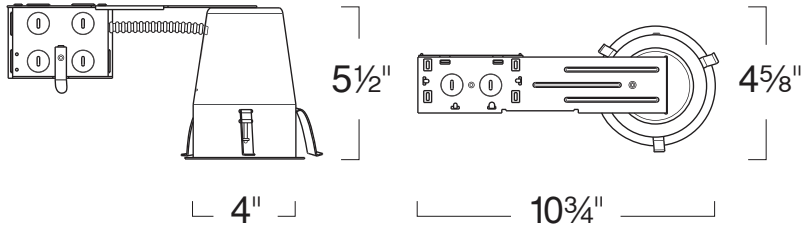

### SPECIFICATION

120V 75W Max PAR20/PAR30 MED E26  
40W A19 - Ceiling Cut Out: 4 1/2"

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

**Mounting:** Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

**Socket:** Standard porcelain medium screw base socket with high temperature leads.

**Junction Box:** 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (6) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Insulation Contact:** IC rated for 12W LED or lower. Non IC rated for more than 12W housing must be kept 3" from insulation.

**Airflow:** Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

**Safety Labels:** UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** UL Listed, cETL Listed

### COMPATIBILITY

|   |  |   |
|---|--|---|
| <br><b>LRD442</b><br>4" 120V DECO DOME RETROFIT (NON-DIMMING) | <br><b>LR934</b><br>PINHOLE W/ BAFFLE                  | <br><b>LR993</b><br>PHENOLIC BAFFLE                       |
| <br><b>LRS923</b><br>FRESNEL LENS W/ REFLECTOR                | <br><b>LR987</b><br>ADJUSTABLE REFLECTOR               | <br><b>LR944</b><br>PHENOLIC BAFFLE NARROW APERTURE       |
| <br><b>LRELD443</b><br>BAFFLE DOME LENS (DIMMABLE)            | <br><b>LRELD467</b><br>ADJUSTABLE PULL DOWN (DIMMABLE) | <br><b>LRD400</b><br>4" 12V LED RETROFIT LOW PROFILE TRIM |
| <br><b>LRS924</b><br>DECO GLASS DOME W/ REFLECTOR             | <br><b>LR946</b><br>DECO GLASS-SHIELD (DOME)           | <br><b>LR994</b><br>DEEP PHENOLIC BAFFLE                  |
| <br><b>LR997</b><br>PAR20 GIMBAL                              | <br><b>LR999</b><br>SHALLOW REFLECTOR                  | <br><b>LRLD4</b><br>4" LED REFLECTOR                      |

Please see website for more compatible items.

### FEATURE:



ORDERING EXAMPLE : LH99R

### LH99R RATING

**LH99R** **Blank** :Standard  
**A** :Airtight

ID#: 102