


LR502 - BAFFLE W/ CLEAR REFLECTOR

5" LINE VOLTAGE TRIMS

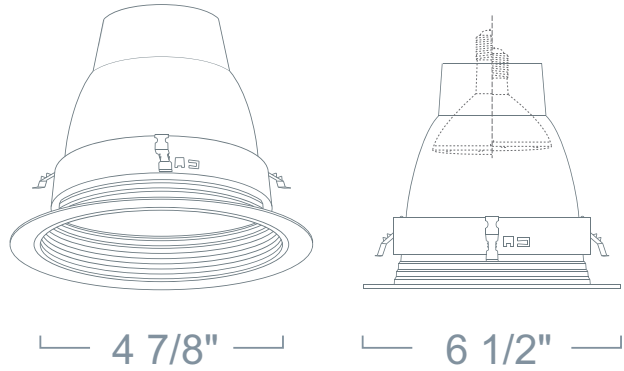

SPECIFICATION

120V 75W Max PAR30/R30/A19 MED E26

Application: Used for general ambient lighting. This traditional look of the baffle trim creates proper lighting that can be used in residential, retail, and light commercial applications.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Baffle Finish: Spun Aluminum Reflector. Die-formed aluminum baffle ridges eliminate stray light. Available in White, Black and All Natural*.

Ring Finish: Die-Formed Aluminum Trim Ring Available in White, Black, Natural and Copper.

Label: UL Listed, cETL Listed

COMPATIBILITY



LHS

STANDARD NEW
CONSTRUCTION
HOUSING



LHSR

STANDARD REMODEL
HOUSING

Note: Wattage limitations on compatible items must be met.

2016.6.14

FEATURE:



ORDERING EXAMPLE : LR502W

LR502	BAFFLE FINISH	RING FINISH
W	:White	Blank :White
B	:Black	B :Black
N	:All Natural*	N :Natural
		CO :Copper

* Comes standard with a matching ring finish. Use "W" for White Ring.

ID# : 84