

Installation Instructions

NUA-802

Junction Box for LEDUR & LEDUR-TW


READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

⚠ FIRE/ELECTRICAL HAZARD: INSTALL ACCORDING TO NATIONAL ELECTRIC CODE AND ANY APPLICABLE MUNICIPAL CODE REQUIREMENTS. - This equipment is intended to be installed only by qualified personnel. The installation must be made in accordance with the current edition to the National Electric Code and all applicable state and local building codes. The final installation must be approved by the appropriate qualified electrical/building inspector(s). Improper installation may result in a fire or electrical hazard. Be sure the electrical power to the circuit has been disconnected before installing this electrical system.


⚠ RISQUE D'INCENDIE / D'ÉLECTRICITÉ: INSTALLER SELON LE CODE ÉLECTRIQUE NATIONAL ET TOUTES LES EXIGENCES RELATIVES AU CODE MUNICIPAL APPLICABLE. - Cet équipement est destiné à être installé uniquement par du personnel qualifié. L'installation doit être faite conformément à l'édition actuelle du Code national de l'électricité et de tous les codes de construction locaux et nationaux applicables. L'installation finale doit être approuvée par un ou plusieurs inspecteurs qualifiés en électricité / bâtiment. Une installation incorrecte peut entraîner un incendie ou un risque électrique. Assurez-vous que l'alimentation électrique du circuit a été déconnectée avant d'installer ce système électrique.

INSTALLATION INSTRUCTIONS

1. Remove junction box cover.
2. Slide OUTPUT electrical port to remove it from junction box, then remove the port cover.
3. Remove 3/8" knockout, then connect die-cast conduit fitting.
4. Put the input cable through the 3/8" die-cast conduit fitting, then fasten screw to fix the input cable.
5. Use P2 connector to connect between external input cable and wire of output electrical port in same color combination like white & white, black & black, green & green (ground wire).
6. Slide wire connected output electrical port to assemble it to junction box.
7. Connect junction box and device by either end-to-end connector or jumper cord.

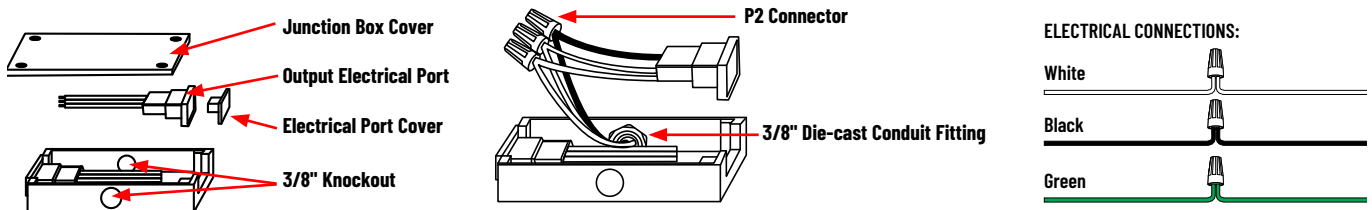

ELECTRICAL CONNECTIONS:



8. Fix junction box at the designated location by the flat head screws provided.
9. Fix junction box cover by fastening round screw head.

