

NUDTW-98 Series

Bravo FROST Tunable White 120V LED Linear

Source: 10W LED

850lm/ft.

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

Low-profile LED Bravo FROST Tunable White fixtures provide excellent and even illumination on all surfaces. At only 10 watts per foot, Bravo FROST TW produces an incredible 850 lumens per foot at a crisp sharp 90+ CRI. Each Bravo Frost TW contains its own driver allowing a 120V feed and longer single runs than low voltage systems. Each luminaire includes 90° adjustable brackets and integral CCT switch to change the color temperature (3000K / 3500K / 4000K).

FEATURES

- Architectural extruded aluminum construction
- Symmetrical internal reflectors produce broad even light
- Frosted lens eliminates LED diode image
- 120V linear system
- 850 lumens / 10 Watts per foot
- Field Selectable CCT (3000K, 3500K or 4000K @ 90+ CRI)
- Available in 4 different lengths: 12", 16", 24" or 32"
- Linkable up to 270 Watts fixtures (about 27')
- Less than 1" in depth.
- Self contained dimmable electronic driver in each unit
- 0° to 90° adjustable mounting brackets included

INCLUDED WITH EVERY BRAVO FROST

(2) Adjustable mounting clips (0° - 90°) and (1) End-to-End Connector

HOUSING

Extruded aluminum with frosted lens.

MOUNTING

Two adjustable mounting brackets (0° - 90°) are included with each luminaire.

ELECTRICAL

Input Voltage: 120V

Lumens / Wattage: 850lm / 10W per foot

Color Temperature: Field Selectable CCT (3000K / 3500K / 4000K)

CRI: 90+ CRI

Max Run Length: 270W max.

Dimming: Triac or ELV (Dimmable down to 15% with Triac dimmer. ELV has best dimming performance.)

ACCESSORIES

NUA-902W: Hardwire Junction Box

NUA-904W: 72" 3-Wire Hardwire Connector

NUA-905W: 72" Cord and Plug

NUA-903W: End-to-End Connector

NUA-906W: 6" Jumper Cable

NUA-912W: 12" Jumper Cable

NUA-924W: 24" Jumper Cable

NUA-972W: 72" Jumper Cable

NUA-909W: Adjustable Mounting Brackets (set of two - included with each luminaire)

LABELS AND LISTINGS

- cULus Listed for Dry Location
- ENERGY STAR® Certified
- 5-Year Limited Warranty
- Certified to the high efficacy requirements of California Title 24 JA8-2019





PRODUCT IMAGES & DIMENSIONS




Selectable CCT


Three position sliding switch
3000K / 3500K / 4000K

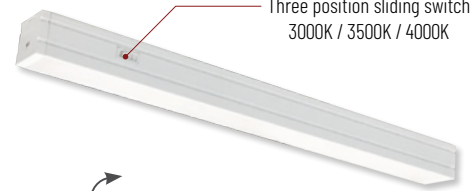


90° Adjustability
with included
mounting brackets




3-wire system
meets most code
requirements

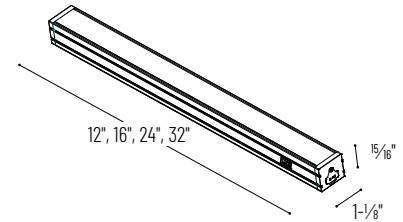

0-90° ADJUSTABILITY

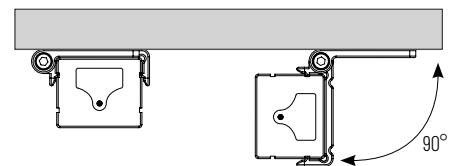

COVE APPLICATION



Bravo FROST Tunable White 120V LED Linear

Catalog No.	Length / Wattage	Color Temperature	Finish
NUDTW-98	12 = 12" / 10W	(blank) = Field Selectable CCT	/W = White
	16 = 16" / 13W	(3000K / 3500K / 4000K)	
	24 = 24" / 20W		
	32 = 32" / 26W		

Accessories

Description
NUA-902W = Hardwire Junction Box
NUA-904W = 72" 3-Wire Hardwire Connector
NUA-905W = 72" Cord and Plug
NUA-903W = End-to-End Connector
NUA-906W = 6" Jumper Cable
NUA-912W = 12" Jumper Cable
NUA-924W = 24" Jumper Cable
NUA-972W = 72" Jumper Cable
NUA-909W = Adjustable Mounting Brackets (set of two)

Example: **NUDTW-9812/W** = 12" Bravo FROST Tunable White, Field Selectable CCT (3000K / 3500K/4000K), White finish

NUDTW-98 Series

Bravo FROST Tunable White 120V LED Linear Accessories

Type	_____
Project	_____
Catalog No.	_____
Notes	_____



Hardwire Junction Box

NUA-902W

Junction box used to power NUDTW-98 Series using jumper cable or NUA-904W (3-Wire Hardwire Connector)

Width: 3-5/8" Length: 6-1/4" Height: 1"



72" 3-Wire Hardwire Connector

NUA-904W

3-Wire connector used to hardwire fixture to NUA-902W (Junction Box).



72" Cord and Plug

NUA-905W

6' Grounded AC power cord to connect fixture to an outlet.



End-to-End Connector

NUA-903W

Used to join two fixtures together or to NUA-902W (Junction Box) seamlessly. One is included with each luminaire.



Jumper Cables

NUA-906W

6"

NUA-912W

12"

NUA-924W

24"

NUA-972W

72"

Used to join two fixtures together or to NUA-902W (Junction Box).



Adjustable Mounting Brackets

NUA-909W

Set of Two

Mounting brackets used to mount fixture to surface. Adjust from 0° to 90°. Two brackets are included with each luminaire.