





• ANGLED SHROUD
• NATURAL BRONZE FINISH



Angled Shroud (A)

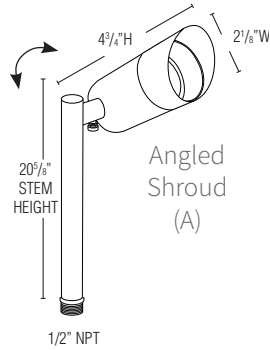

• FLAT SHROUD
• STAINLESS STEEL FINISH



Flat Shroud (F)



ETL LISTED
COMPLIES WITH UL1838

PROJECT	DATE
TYPE	CATALOG #

ARCHITECT PATH

BRASS

PS-501B

KEY FEATURES


- CONTEMPORARY DESIGN
- SOLID BRASS
- NATURAL BRONZE OR STAINLESS STEEL FINISH OPTIONS
- TEMPERED, SHOCK AND HEAT RESISTANT LENS
- HIGH TEMPERATURE CERAMIC SOCKET
- FIELD REPLACEABLE LED LAMP

PRODUCT SPECIFICATIONS

DIMENSIONS	20-5/8" OAH X 4-3/4" H X 2-1/8" W
MATERIAL	SOLID BRASS
LENS	CLEAR FLAT TEMPERED
SOCKET	BI PIN
LAMP	MR16
VOLTAGE	9-15V AC/DC
PROJECTION	UP TO 50 FT


STEP 1

FIXTURE CONFIGURATION

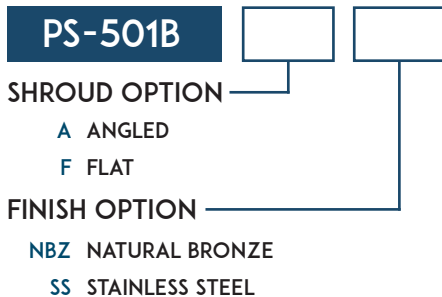


STEP 3

ACCESSORY OPTIONS

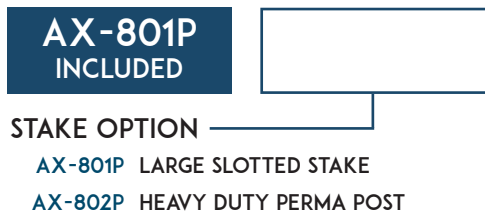

STEP 2

LED LAMP CONFIGURATION

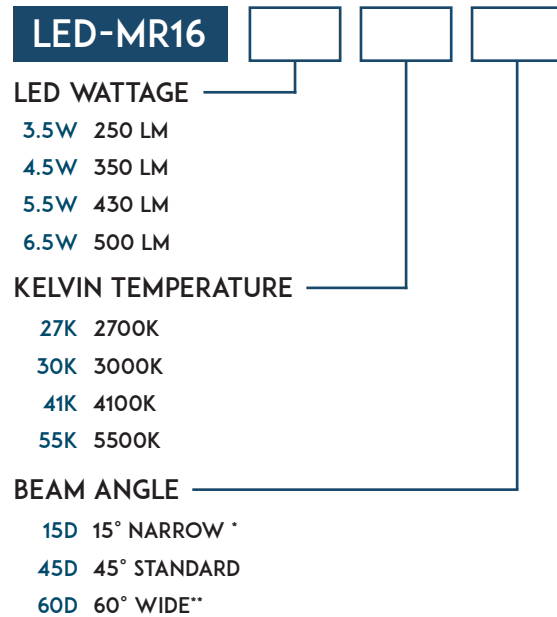

* 15° Only available in 5.5w - 3000k
** 60° Available in 3.5w, 4.5w, 5.5w, 2700k or 3000k

+ See accessory spec sheet for additional mounting options
++ Complimentary Accent Light Series (FL-501B) also available

+ Consult factory for additional options