

GENERAL INFORMATION

USE OF PRODUCT

The 10" Builders Plus LED Commercial Downlight series is the ideal product for energy-efficient lighting in Non-IC commercial applications. Features color temperature and lumen selectability. Deep cone reflector designed for anti-glare purposes.

BUILDERS PLUS FEATURES

Lumen Selectable:
LS07- 700 lm, 910 lm, 1330 lm, 1680 lm, 1940 lm
LS2- 2300 lm, 3000 lm, 3570 lm
LS4- 4000 lm, 4500 lm, 5100 lm
Color Temperature Selectable:
2700K, 3000K, 3500K, 4000K, 5000K
Color Rendering Index: 84+ CRI
Optical Lens: LS07 (70° standard) LS2 (75° standard)
LS4 (75° standard)
LED Life: 50,000 hours
Driver Info: 120–277V; 50/60 Hz
Operating Temperature: -30°C–40°C

LED ENGINE

LED engine available in 5CTS 2700K, 3000K, 3500K, 4000K, 5000K (LS07 and LS2) and 3CTS 3000K, 3500K, 4000K (LS4) in 84+ CRI. Color temperature may be modified in field. Optional locking mechanism available. LED mounted to aluminum heat sink for maximum life output and thermal management.

MOUNTING

Mounting clip attached to reflector for easy installation and ability to remove fixture from below the ceiling.

DIMMING

LED driver accommodates 120–277V input with 0–10V dimming protocol. Fixture available in three selectable lumen packages. LS07 (700 lm, 910 lm, 1330 lm, 1680 lm, 1940 lm), LS2 (2300 lm, 3000 lm, 3570 lm), LS4 (4000 lm, 4500 lm, 5100 lm). Lumens may be modified in field or optional lumen locking mechanism available upon request.

TRIM

Self-flanged spun aluminum reflector with frosted lens to shield direct view from LEDs. Reflector available in haze finish with white trim.

EMERGENCY BATTERY

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 delivered lumens.

INSTALLATION

Non-IC housing. Insulation must be kept at least 3" away from fixture.

LABELS/COMPLIANCE

- cUL listed
- Energy Star
- Title 24
- Wet location
- 5-year limited warranty



ORDERING INFORMATION

SERIES	HOUSING	LUMENS	COLOR TEMPERATURE SHIFT	REFLECTOR	TRIM
RBC10	FR - Remodel/Retrofit Frame	LS07¹ - Lumen Selectable (700, 910, 1330, 1680, 1940, lm) LL07 - Lumen Locked at 700 lm LL09 - Lumen Locked at 910 lm LL13 - Lumen Locked at 1330 lm LL16 - Lumen Locked at 1680 lm LL19 - Lumen Locked at 1940 lm LS2² - Lumen Selectable (2300, 3000, 3570 lm) LL23 - Lumens Locked at 2300 lm LL30 - Lumens Locked at 3000 lm LL35 - Lumens Locked at 3570 lm LS4³ - Lumen Selectable (4000, 4500, 5100 lm) LL40 - Lumens Locked at 4000 lm LL45 - Lumens Locked at 4500 lm LL51 - Lumens Locked at 5100 lm	5CTS - Color Temp. Selectable (2700K, 3000K, 3500K, 4000K, 5000K) CT27 - Locked at 2700K CT30 - Locked at 3000K CT35 - Locked at 3500K CT40 - Locked at 4000K CT50 - Locked at 5000K 5CTS - Color Temp. Selectable (2700K, 3000K, 3500K, 4000K, 5000K) CT27 - Locked at 2700K CT30 - Locked at 3000K CT35 - Locked at 3500K CT40 - Locked at 4000K CT50 - Locked at 5000K 3CTS - Color Temp. Selectable (3500K, 4000K, 5000K) CT35 - Locked at 3500K CT40 - Locked at 4000K CT50 - Locked at 5000K	W - White H - Haze	W - White



OPTIONS

- E18W** - Emergency Battery with Integral Switch (8 Watts)
- ER8W** - Emergency Battery with Remote Switch (8 Watts)
- E15W** - Emergency Battery with Integral Switch (15 Watts)
- ER15W** - Emergency Battery with Remote Switch (15 Watts)


Notes

1. Lumen selectable between 700 lm, 910 lm, 1330 lm, 1680 lm, 1940 lm. Lumens may be modified in field.
2. Lumen selectable between 2300 lm, 3000 lm, 3570 lm. Lumens may be modified in field.
3. Lumen selectable between 4000 lm, 4500 lm, 5100 lm. Lumens may be modified in field.

DIMENSIONS

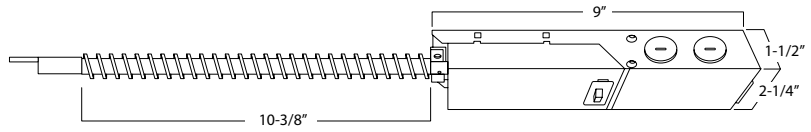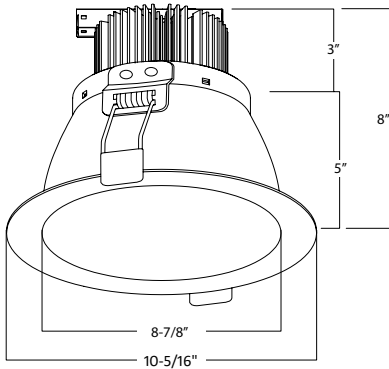

RETROFIT ASSEMBLY

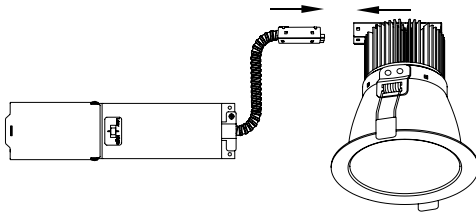

Driver with J-Box + Light Module + Reflector

WATT/LUMEN CHART

	Wattage	Lumens	CRI	Switch
LS07	9W	700 lm	84+	Low
	12W	910 lm	84+	Low
	18W	1330 lm	84+	Medium
	25W	1680 lm	84+	High
	29W	1940 lm	84+	High
LS2	29W	2300 lm	84+	Low
	39W	3000 lm	84+	Medium
	48W	3570 lm	84+	High
LS4	50W	4000 lm	84+	Low
	60W	4500 lm	84+	Medium
	70W	5100 lm	84+	High

LIST OF COMPATIBLE DIMMERS


(120/277V 0-10 Dimming)

MFR	MODEL#	DIMMING RATE
Lutron	NFTV	1-100%
Lutron	NTSTV-DV	1-100%
Legrand	CD4FBLW	1-100%
Leviton	1P710-DL	1-100%

LUMEN AND COLOR TEMPERATURE LOCK MECHANISM COVER



Lumen selectable locking mechanism cover

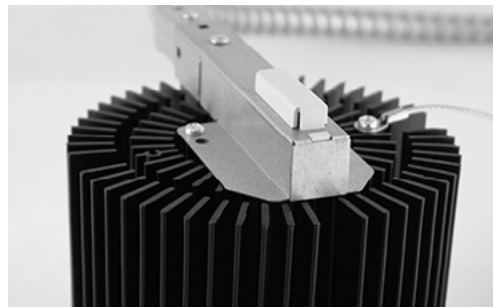

Color Temperature selectable locking mechanism cover