

## SPECIFICATION SHEET

JOB NAME: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 QUOTE/REF#: \_\_\_\_\_







**PLC-450** is a 4.3W, 120V high performance puck light that delivers up to 230 lumens of light. Link up to 20 puck lights together with its easy to connect built-in connectors to cover a wider area of illumination. The PLC-450 can be surface or recess mounted for use with task lighting, display shelves and cabinet applications.

### FEATURES


- 120V NO transformer required
- 230Lm
- Superior Color Rendering Index (90+ CRI)
- 3000K and 4000K CCT options
- Low profile design
- Dimmable with most CL and ELV dimmers
- Direct hardwire or plugin installation

### SPECIFICATIONS

INPUT VOLTAGE	120V
POWER CONSUMPTION	4.3W per puck
LUMEN OUTPUT	230Lm
BEAM ANGLE	120°
CCT	3000K and 4000K
CRI	90+
DIMMING	10-100% with most CFL/LED and ELVs
MAXIMUM RUN LENGTH	20 pucks
MOUNTING	Surface or recess mount (2 <sup>3/8</sup> " cutout)
LUMEN MAINTENANCE	50,000 hrs.
CERTIFICATIONS	cETLus Listed (dry location)
FINISH OPTIONS	Black, Brushed Nickel, Bronze and White
DIMENSIONS	2 <sup>3/4</sup> " diameter x 7/8" height
CUTOUT	2 <sup>3/8</sup> " (60.5MM)

FINISH	CRI	LUMEN
	90+	230
	90+	230
	90+	230
	90+	230

### DIMENSIONS

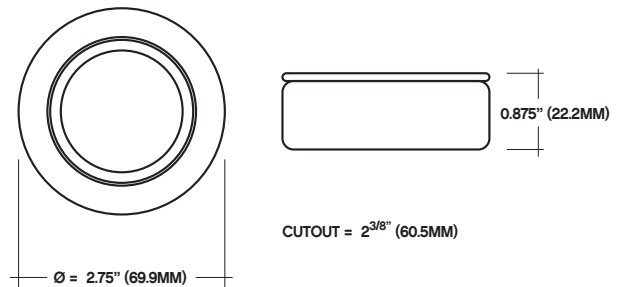

### ORDERING GUIDE EX: PLC450A-30K-BK-120

PLC450				
MODEL	TYPE	COLOR TEMP	FINISH	VOLTAGE
	A - Single Wire B - Two Wire	30K - 3000K 40K - 4000K	BK - Black BN - Brushed Nickel BZ - Bronze WH - White	120 - 120V