

IG-103-SS Recessed LED Luminaire

JOB NAME: _____
LOCATION: _____
QUOTE/REF#: _____




The **IG-103-SS** is a 2.5W in-ground dimmable LED fixture which can be used in most indoor or outdoor applications. Capable of up to 154 Lumens of light output, this easy to install fixture comes with a concrete pour housing and features heavy duty stainless steel finish able to withstand a maximum load of 2,000 lbs. Available in round or square face plate options.

SPECIFICATIONS

VOLTAGE	24V DC
POWER CONSUMPTION	2.5W
LUMEN OUTPUT	136 Lm (30K) 154 Lm (60K)
OPERATING FREQUENCY	50 / 60Hz
CCT	3000K, 6000K
CRI	90
STANDARD OPTICS	30°
DIMMING	YES
IP RATING	IP67 wet location
OPERATING TEMPERATURE	-4 ~ 122°F (-20 ~ 50°C)
AMBIENT TEMPERATURE	-4 ~ 176°F (-20 ~ 80°C)
LUMEN MAINTENANCE	50,000 hrs.
CONNECTION	20" 18AWG Lead Wire
MAXIMUM LOAD	2,000 lbs.
HOUSING DIMENSIONS	3.82" x 3.34"
FACE PLATE DIMENSIONS	2.16" x 3.11"

FEATURES

- Suitable for interior or exterior applications.
- Designed for in-grade applications.
- Heavy duty stainless steel finish.
- 3000K, 6000K and Blue
- Standard optics: 30°
- Suitable for wet locations.
- Dimmable
- Rated to last 50,000 hrs.
- 24V DC power supply required.

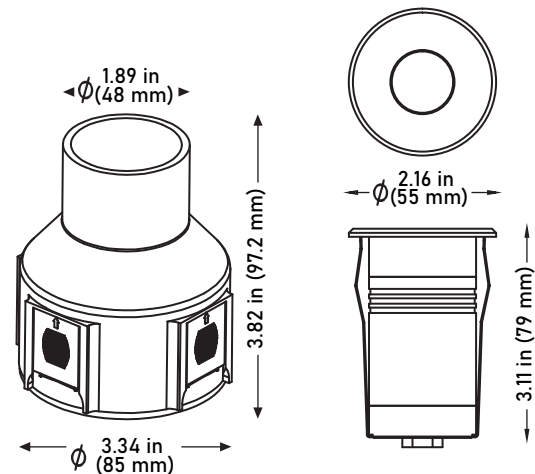


IG-103-SS

Recessed LED Luminaire

STANDARD ORDERING CODE


Model	Color Temp	Optics	Voltage
IG-103-SS	30K 3000K	30 30 degrees	24 24 Volts
	60K 6000K		

COMPATIBLE TRANSFORMERS

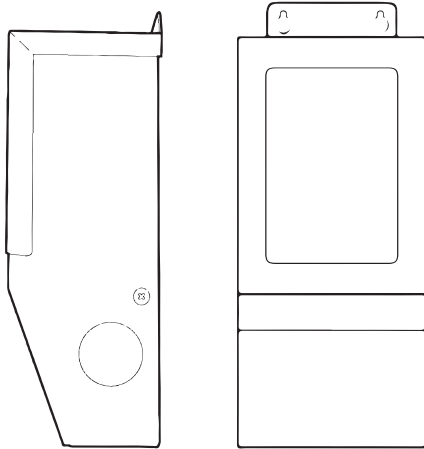

PSDM SERIES | DIMMABLE MAGNETIC LOW VOLTAGE (MLV)


PSDM-20W-24V	CLASS 2	5.6" x 2" x 2.14"
PSDM-40W-24V	CLASS 2	5.6" x 2" x 2.14"
PSDM-60W-24V	CLASS 2	6.5" x 2.3" x 2.5"
PSDM-100W-24V	CLASS 2	6.5" x 2.3" x 2.5"
PSDM-150W-24V		9.8" x 3" x 3"
PSDM-192W-24V	CLASS 2	7.0" x 7.0" x 3.2"
PSDM-200W-24V		9.8" x 3" x 3"
PSDM-288W-24V	CLASS 2	9.8" x 4.2" x 3.5"
PSDM-300W-24V		7.0" x 7.0" x 3.2"

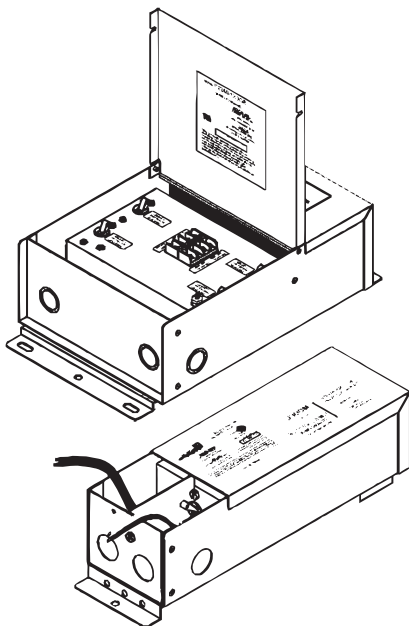

PSDH SERIES | HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)


PSDH-48W-24V	CLASS 2	11.25" x 3.37" x 3.25"
PSDH-96W-24V	CLASS 2	11.25" x 3.37" x 3.25"
PSDH-288W-24V	CLASS 2	14.25" x 8.43" x 4.43"

COMPATIBLE TRANSFORMERS

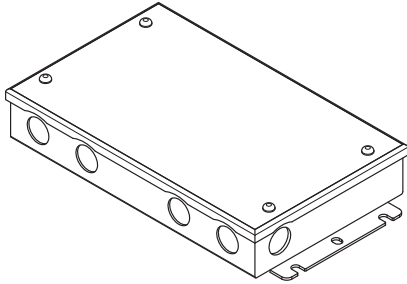

PSDL SERIES | TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5"x 3.63"x 1.03"
PSDL-60W-24V	CLASS 2	7.4"x 3.63"x 1.03"
PSDL-96W-24V	CLASS 2	8.67"x 3.67"x 1.62"
PSDL-150W-24V	CLASS 2	8.67"x 3.67"x 1.62"
PSDL-192W-24V	CLASS 2	10.25"x 4.06"x 1.82"
PSDL-200W-24V	CLASS 2	10.25"x 4.06"x 1.82"
PSDL-288W-24V	CLASS 2	10.25"x 4.06"x 1.82"
PSDL-300W-24V	CLASS 2	10.25"x 4.06"x 1.82"

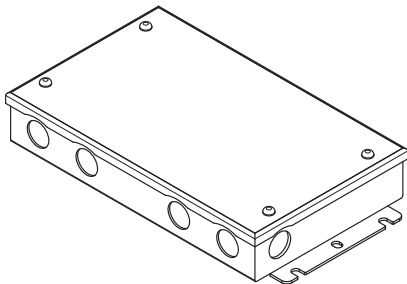

PSHK SERIES | NON-DIMMING W/ JUNCTION BOX

PSHK-30W-24V-UNV	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V-UNV	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V-UNV	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V-UNV		10.24" X 4.06" X 1.81"
PSHK-200W-24V-UNV		10.24" X 4.06" X 1.81"
PSHK-300W-24V-UNV		10.94" X 4.25" X 1.81"