

6" 0-10V Shallow Remodel Dedicated LED Housing




Features

- Wired for 0-10V Dimming
- Airtight rated
- 120/277V Input
- Meets restricted air flow requirements (per ASTM E-283)
- Shallow for Non-IC Application

Specifications

Voltage	120/277V
Dimmable	0-10V/Triac/ELV
Lamp Type	LED

Dimensions

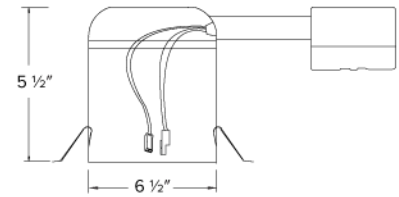

Product Numbers

Item	Lamp type	Voltage	Dimming
EL760RICDXA	LED	120/277V	0-10V/Triac/ELV

Compatible Products

For use with Dedicated 6" IC LED Housings



6" Ply™ 0-10V Dimmable, 120/277V LED Inserts



Round Insert

EL695

Finishes:

(DW, DHW, DCW)

PRODUCT NUMBER BUILDER			
6" 120/277V LED Inserts	Color Temperature		Finish
EL695			
	30	3000K (1350 lm)	DW All White
	35	3500K (1425 lm)	DHW Haze w/White Ring
	40	4000K (1500 lm)	DCW Chrome w/White Ring

6" Ply™ 0-10V Dimmable, 120/277V Adjustable LED Inserts



Round Adjustable Pull Down

EL697

Finishes:

(DXW, DXB, DXBZ, DXN)

ACCESSORIES



Interchangeable Lens
(For EL697 Series only)

EP710C 20° Beam
EP712C 60° Beam

PRODUCT NUMBER BUILDER			
6" 120/277V Adjustable LED Inserts	Style	Color Temperature	Finish
EL6			
	97 Round Adjustable	27D 2700K (850 lm)	DXW All White
		30D 3000K (900 lm)	DXB All Black
			DXBZ All Bronze
			DXBN All Nickel