

# EMT150-E

## Magnetic Dimming no dimming

Outdoor Black Powder Coated Steel Enclosure

Multi Tap: **12-15VAC**

Total Wattage: **150W max**


Input Voltage: **120V 60Hz**



www.emcod.com



Conforms to UL STD. 1838  
Certified to CSA  
STD. C22.2 nIS 250.0, 250.7

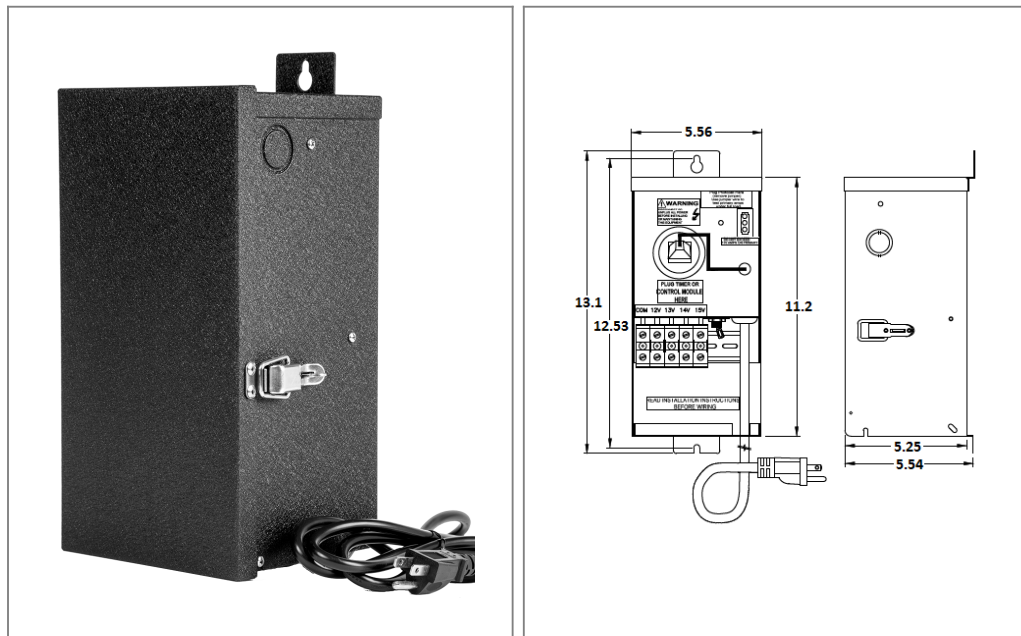

### Transformer


Not dimmable if use timer or/and photocell  
Temperature class B(130°C)  
Input leads: Line cord  
Output leads: Terminal Block  
Magnetic manually reset secondary breaker 12.5A  
Timer and photocell build in options

### Housing

The actual transformer 150W is encapsulated in the enclosure  
The enclosure is Black Powder Coated Steel, NEMA 3R rated  
Wiring compartment has 5 knockouts sizes for 3/8 inch screw cable connectors  
Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded  
Dimensions (inch): H = 13, W = 5.56, D = 5.54  
Weight (LBs): 1.25

### Electrical Parameters

Input Voltage:	<b>120V 60Hz</b>
Max. input current at full load:	<b>1.25A</b>
Output voltage without load:	<b>12/ 13/ 14/ 15VAC</b>
Output voltage fully loaded:	<b>11.5/ 12.5/ 13.5/ 14.5VAC</b>
Max. Total Wattage:	<b>150W</b>
Max. Output Current:	<b>12.5/ 11.5/ 10.7/ 10A</b>
Efficiency:	<b>90%</b>
Load regulation:	<b>8%</b>

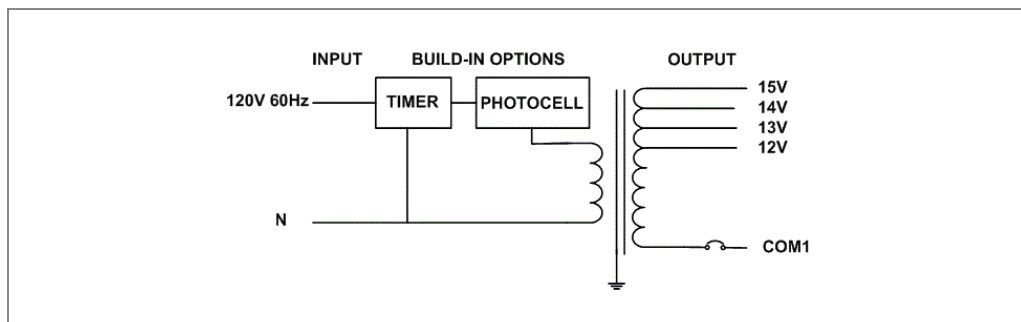

Mailing Address: 6925 Eton Ave. Canoga Park, CA 91303 Tech support: Arik Nirenberg phone: 818-904-3309 cellphone: 818-269-4091  
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com