

**Canless Downlights**

**SnapTrim-Line: 3" Regressed Downlights**  
5-CCT Selectable



**Detail Specifications:**

- Finish: White, Black, Custom
- Trim: Round or Square
- Wet Location Rated
- Beam Angle: 38° standard, 24° 38° available
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear COB
- Average life (L70) of 50,000 hours

**Applications:**

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

**Product Information:**

- 5-CCT Selectable: 27/30/35/40/50K
- Various sizes, finishes, and trims available
- Standard white round trim included: optional trims available
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

**Driver Options:**

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

**Mounting & Installation:**

- Cut Out Dimensions
  - Round: 3-3/4"
  - Square: 3-1/4"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No can needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

**Certifications:**

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101

Series	Beam Angle	Emergency
<b>LED-DLJBX-3RG-15W-5CCT-WH-R</b>		
1,000LM White Round	(Blank)	(Blank)
	38° Degree	No
	<b>24D</b>	Emergency
	24° Degree	Backup
	<b>60D</b>	<b>EMB</b>
	60° Degree	Emergency
		Backup


**Optional Accessories (Order Separately)**

Trim Options	New Construction Plates	Extension Cables	Emergency Backup <sup>1</sup> (field install)
<b>DLJBX-3RG-TRIM -WH-SQ</b>	<b>CUNV-NC-ICAT-7H</b>	<b>JBX-EXT-6'-2PIN</b>	<b>LED-EMB-25W-HV -0/10V-2P</b>
White Square	Universal Plate with Hanging Bars	6' Extension	Up to 24W fixtures
<b>DLJBX-3RG-TRIM -BLK-R</b>	<b>CUNV-JBX-RI-XL</b>	<b>JBX-EXT-10'-2PIN</b>	
Black Round	Universal Rough In Plate Extra Long	10' Extension	
<b>DLJBX-3RG-TRIM -BLK-SQ</b>		<b>JBX-EXT-12'-2PIN</b>	
Black Square		12' Extension	


1. Field installable. Lasts 90 minutes

Specs and model numbers are subject to change with or without notice.

**FEATURES**

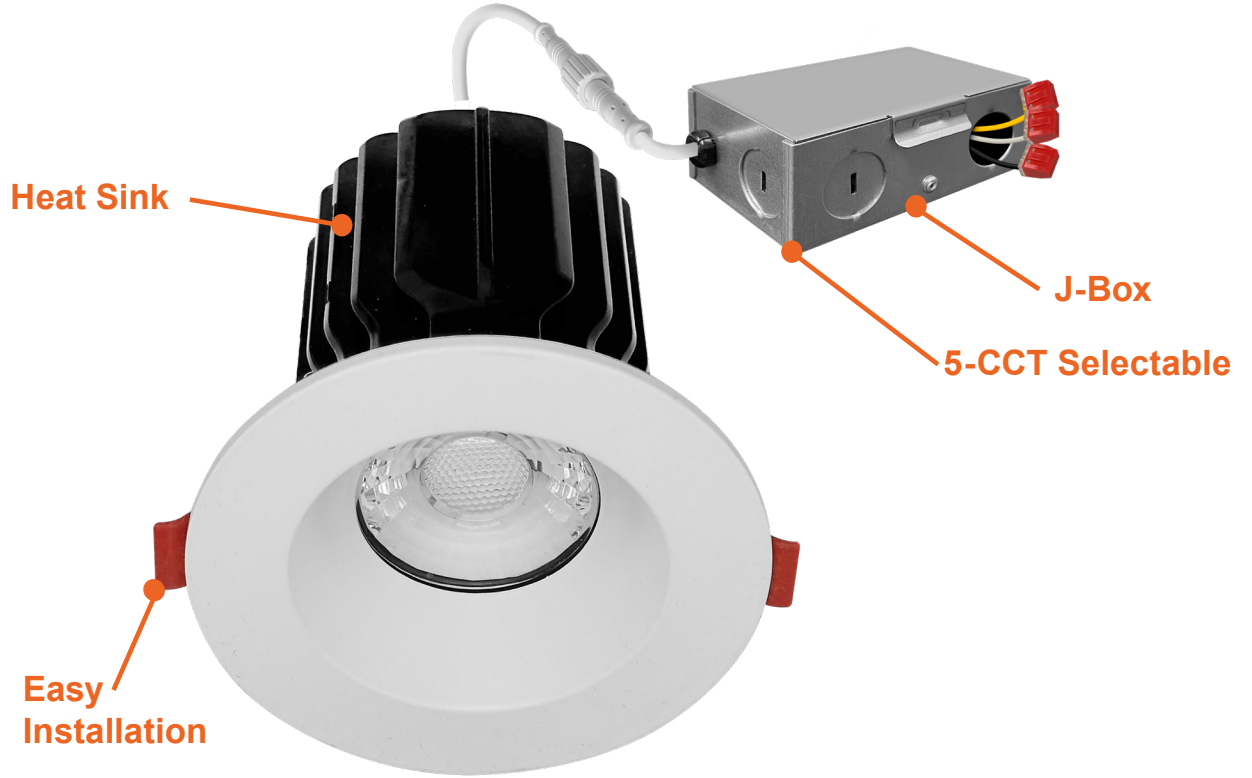


**DIMENSIONS**

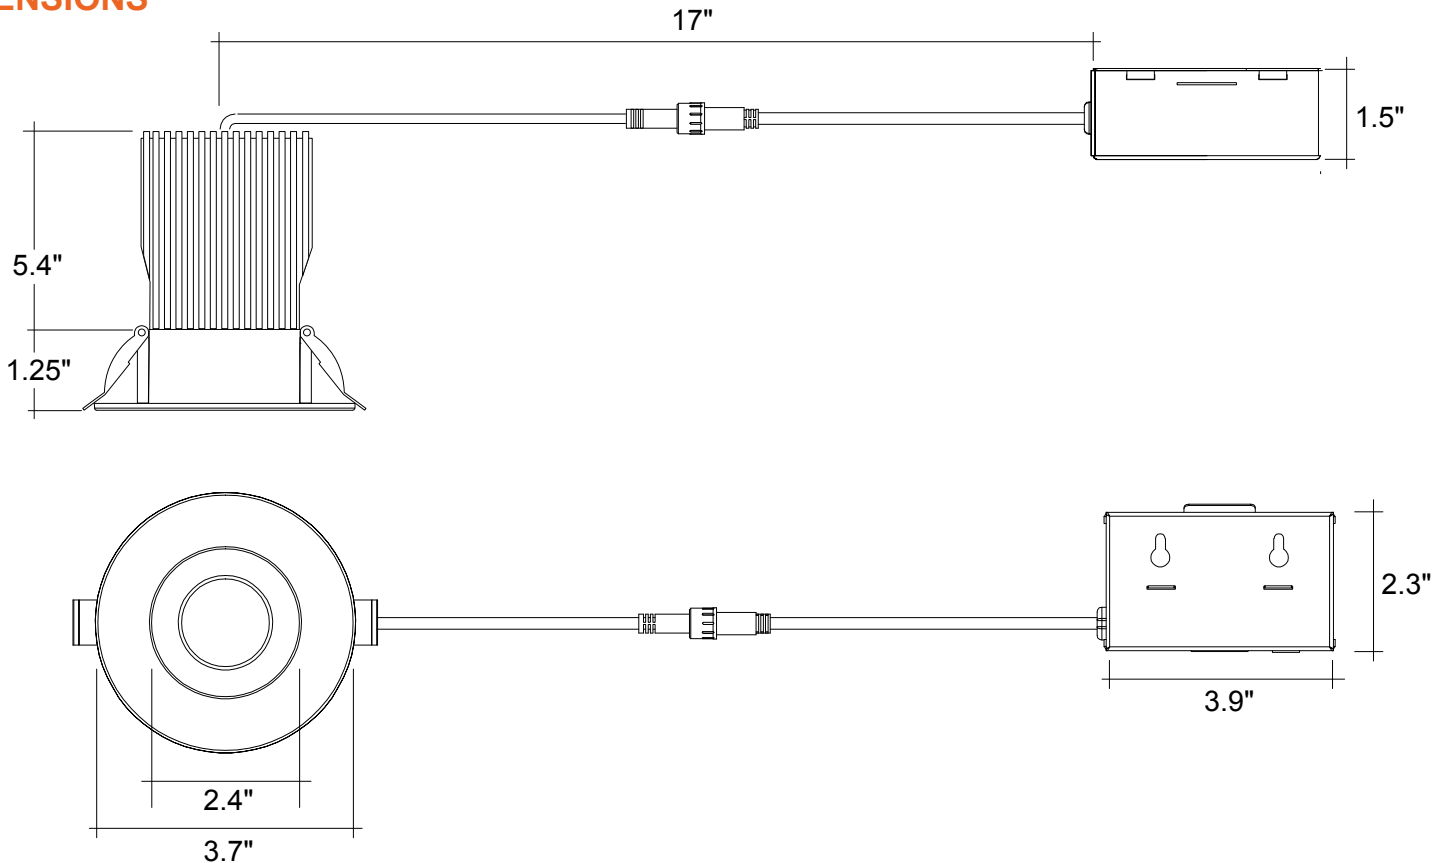

# SnapTrim-Line: 3" Regressed Downlights

## 5-CCT Selectable


### ACCESSORIES

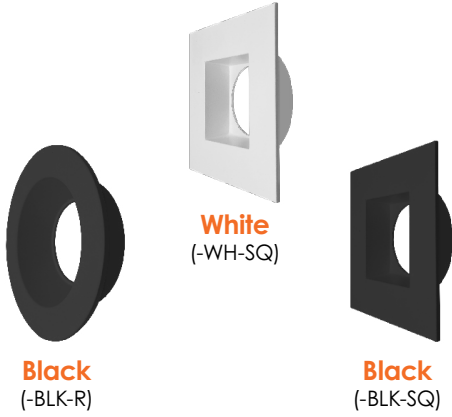


**Black**  
(-BLK-R)

**White**  
(-WH-SQ)

**Black**  
(-BLK-SQ)

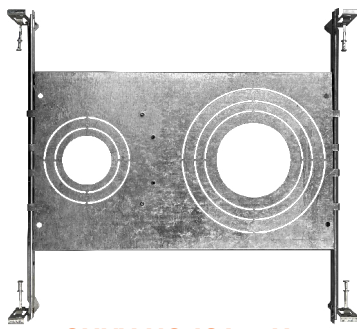


**CUNV-NC-ICAT-7H**  
Universal Pre-Mounting Plate  
13 7/8" x 15 1/8"

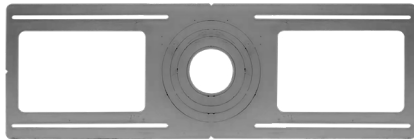

**CUNV-JBX-RI-XL**  
7" x 26"



**JBX-EXT**  
6' / 10' / 12' Extension Cable

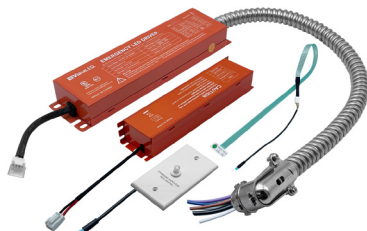

**LED-EMB-25W-HV-0/10V-2P**

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-3RG-15W-5CCT-WH-R	120V	15w	1000	27/30/35/40/50K	>90

### TRIMS

Accessory	Description
DLJBX-3RG-TRIM-WH-SQ	3" Regressed Gimbal White Square Trim
DLJBX-3RG-TRIM-BLK-R	3" Regressed Gimbal Black Round Trim
DLJBX-3RG-TRIM-BLK-SQ	3" Regressed Gimbal Black Square Trim

### CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate
CUNV-JBX-RI-XL	Universal tough in plate (Extra Long)

### EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable
JBX-EXT-12'-2PIN	12" Extension Cable

### EMERGENCY BACKUP

Accessory	Description
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

### TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

#### TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	6633	ADTP703TU	9540
DV-600PR	6674	H703PTW	DAL06P
DVCL-153P	6602		
MACL-153MH	IPL06		
MRF2-6CL			
D-600P			
NTELV-300P			
S-600P			
CT-600P			
CTCL-153P			
TG-600P			
TCCL-153P			
L-153P			