



M-Line: Mini Area Lights

3-CCT & Power Selectable w/ Photocell



KN-Knuckle



TR-Trunion

WATT	LUMENS
15	2,100
30	4,200
35	4,900
50	7,000
60	8,400
70	9,800
80	11,200

Detail Specifications:

- Finish: Bronze, White, Custom finishes available
- IP Rating: Wet Location
- Beam Angle: 120°
- 15, 30W: Non-Dimmable
- 50, 80W: Dimmable
- CCT: 30/40/50K Selectable
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 122° F
- Lens: PC Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

Applications:

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Select-n-Switch Technology
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Two standard arms:
 - 1/2" Knuckle Mount
 - Trunion Mount
- Adjustable 180° arms

Certifications:


- UL Listed for USA and CA
- DLC Premium Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Finish ¹	Bracket	Photocell
LED-ARL-2P30-TRI 15/30W • 2,100/ 4,200Lm	BZ Bronze	KN 1/2" Knuckle	(blank) No
LED-ARL-2P50-TRI 35/50W • 4,900/ 7,000Lm	WH White	TR Trunion	PC Photocell
LED-ARL-3P80-TRI 60/70/80W 8,400/9,800/11,200Lm	BL ¹ Black GRY ¹ Gray CS ¹ Custom Color		PC Button Photocell



1. Standard quickship is bronze and white. Other colors are custom finishes.

Specs and model numbers are subject to change with or without notice.

FEATURES

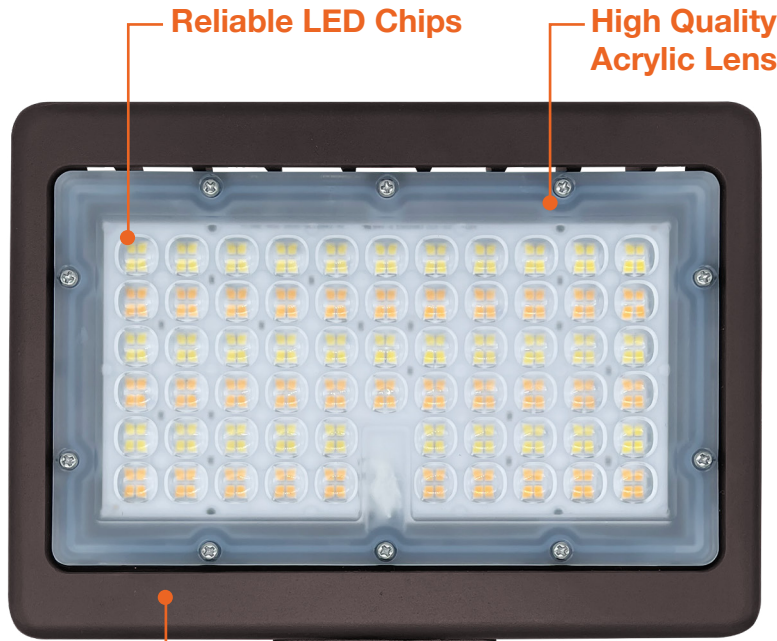


Aluminum Die-Cast

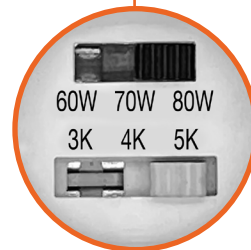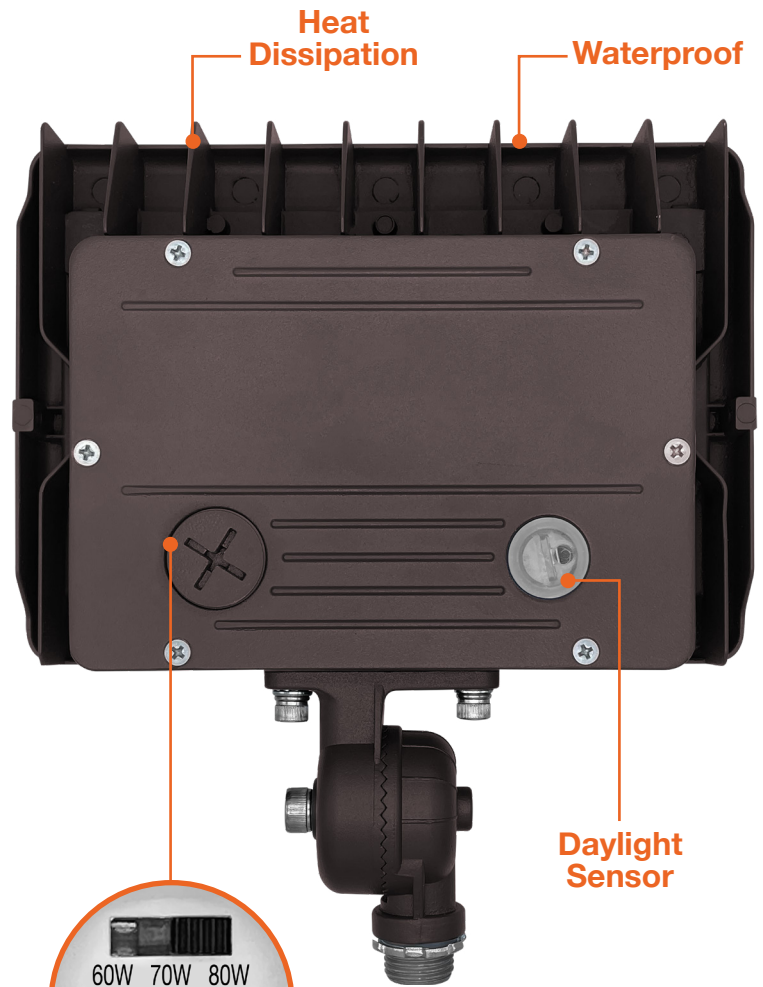


Power Select
3-CCT Selectable

M-Line: Mini Area Lights


3-CCT & Power Selectable w/ Photocell

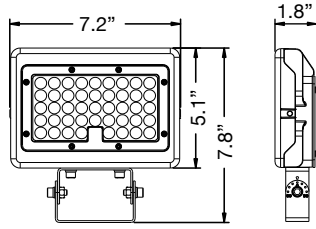


Trunnion Bracket - 15W/ 30W

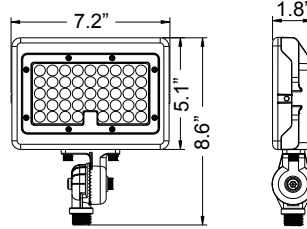


Knuckle Bracket - 15W/30W

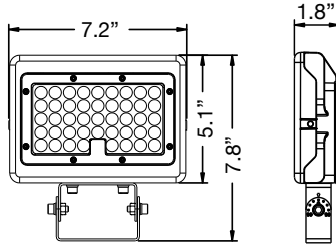


Trunnion Bracket - 50W

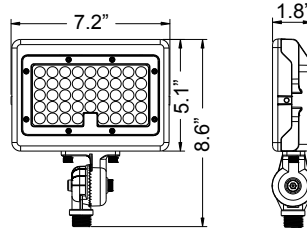

Knuckle Bracket - 50W

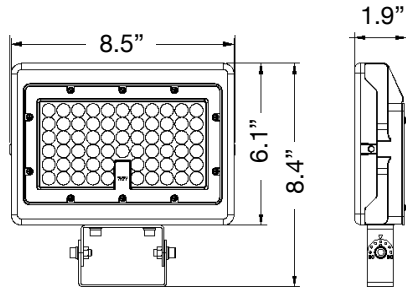

Trunnion Bracket - 80W

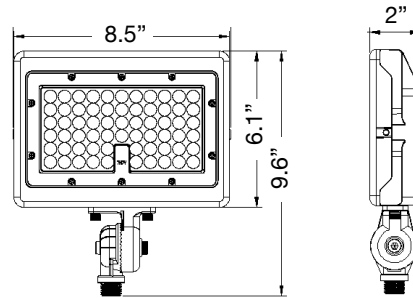

Knuckle Bracket - 80W

30W 3-CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-2P30-TRI-BZ-TR-PC	120-277V	15/30w	2,100/4,200	30/40/50k	>80
LED-ARL-2P30-TRI-BZ-KN-PC	120-277V	15/30w	2,100/4,200	30/40/50k	>80
LED-ARL-2P30-TRI-WH-KN-PC	120-277V	15/30w	2,100/4,200	30/40/50k	>80

50W 3-CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-2P50-TRI-BZ-TR-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80
LED-ARL-2P50-TRI-WH-TR-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80
LED-ARL-2P50-TRI-BZ-KN-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80
LED-ARL-2P50-TRI-WH-KN-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80

80W 3-CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-3P80-TRI-BZ-KN-PC	120-277V	60/70/80w	8,400/9,800/11,200	30/40/50k	>80
LED-ARL-3P80-TRI-WH-KN-PC	120-277V	60/70/80w	8,400/9,800/11,200	30/40/50k	>80
LED-ARL-3P80-TRI-BZ-TR-PC	120-277V	60/70/80w	8,400/9,800/11,200	30/40/50k	>80