

Cusp Disk

J-Box or E26



30K	3000K
TRI	30/40/50K
5-CCT	27/30/35/40/50K

WH	WHITE FINISH
BZ	BRONZE FINISH
BLK	BLACK FINISH
BN	BRUSHED NICKEL FINISH

Detail Specifications:

- Finishes:
 - 4 & 6": White, Bronze, Black, Brushed Nickel
 - 8": White
- IP Rating: Wet Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Housing: Metal
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- AC technology: slim and easy driverless installation
- Ideal for remodel and new construction use
- Slim and sleek design

Driver Options:

- 120V Triac dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- AC Driverless technology
- Flicker Free

Mounting & Installation:

- 30/40 Junction Box (including pancake j-box)
- 4", 6" Recessed can converter

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101
- Closet Rated

Series

LED-CDSK-4-10W-5CCT-WH

650Lm • 27/30/35/40/50K

LED-CDSK-4-10W-5CCT-BZ

650Lm • 27/30/35/40/50K

LED-CDSK-4-10W-TRI-BN

650Lm • 30/40/50K

LED-CDSK-6-15W-5CCT-WH

1,000Lm • 27/30/35/40/50K

LED-CDSK-6-15W-5CCT-BZ

1,000Lm • 27/30/35/40/50K

LED-CDSK-6-15W-5CCT-BLK

1,000Lm • 27/30/35/40/50K

LED-CDSK-6-15W-5CCT-BN

1,000Lm • 27/30/35/40/50K

LED-CDSK-8-27W-5CCT-WH

2,100Lm • 27/30/35/40/50K

Optional Accessories (Order Separately)


Emergency Backup

LED-EMB-25W-HV-2P


For fixtures up to 25W

Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES

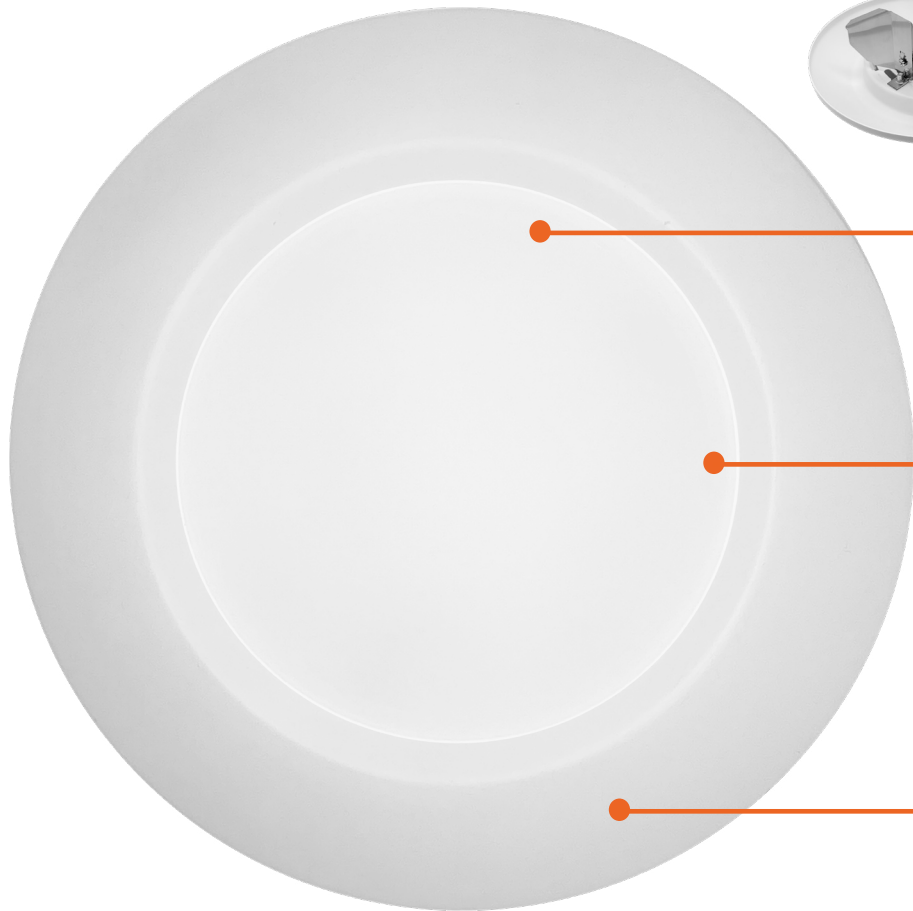

Shown with E26 Base




Shown with E26 Base

100° Beam Angle


5-CCT/ 3-CCT Selectable & 30/40K

Metal Housing


DIMENSIONS

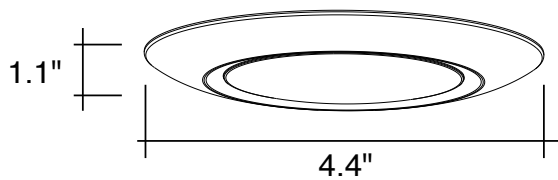

4" Disk

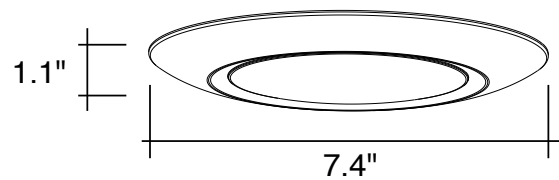


6" Disk

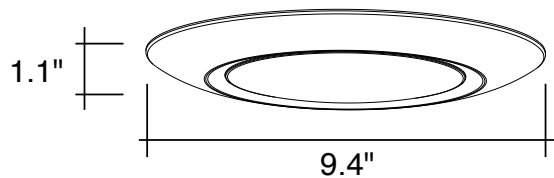


8" Disk

Specs and model numbers are subject to change with or without notice. Customization of product is available.



CDSK-4-CLIP



CDSK-6-CLIP



LED-EMB-25W-HV-2P

Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-4-10W-5CCT-WH	120V	10w	650	27/30/35/40/50K	>90
LED-CDSK-4-10W-5CCT-BZ	120V	10w	650	27/30/35/40/50K	>90
LED-CDSK-4-10W-TRI-BN	120V	10w	650	30/40/50k	>90
LED-CDSK-6-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K	>90
LED-CDSK-6-15W-5CCT-BZ	120V	15w	1000	27/30/35/40/50K	>90
LED-CDSK-6-15W-5CCT-BN	120V	15w	1000	27/30/35/40/50K	>90
LED-CDSK-6-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K	>90
LED-CDSK-8-27W-5CCT-WH	120V	27w	2100	27/30/35/40/50K	>90

BATTERY BACKUP

Accessory	Description
LED-EMB-25W-HV-2P	Up to 25W fixtures

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

Lutron
PD-6WCL
DVCL-153P
CTCL-153P
MACL-153
LECL-153P

Specs and model numbers are subject to change with or without notice. Customization of product is available.