

Slim Wall Pack: SL-Line

3-CCT + 5-Power Selectable



Detail Specifications:

- Finish: Bronze, Custom finishes available
- IP Rating: Wet Location
- Impact Rating: IK08
- Beam Angle: Type IV
- BUG:
 - 3P60W: B3-U3-G5
 - 3P120: B4-U4-G5
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -4° - 122° F
- Lens: Glass Lens
- Average life (L70) of 70,000 hours

Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Slim in size and easy to install
- Photocell is included with an easy quick disconnect
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Five 1/2" knockouts: 1 one each side for convenient installation

Certifications:

- UL Listed for USA and CA
- DLC Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

WATT	LUMENS
30	3,900
40	5,200
60	7,800
80	10,400
100	13,000
120	15,600

Series	Finish ¹	Voltage	Photocell	Sensor ²	Emergency	Surge Protector	Optional Accessories (Order Separately)	
LED-WPF-SL-3P60-TRI 30/40/60W • 30/40/50K	BZ Bronze (Standard)	UNV 120-277V	PC Photocell is included.	(blank) No Sensor	(blank) No Emergency	(blank) 6KV Built in	Remote for Sensors	Shield
LED-WPF-SL-3P120-TRI 80/100/120W • 30/40/50K	BL ¹ Black	HV 277-480V		BMS Bi-Level Motion + Daylight Sensor (S-BMS-EXT-1)	EMB Emergency Backup	20KV 20KV Surge Protector	S-LINE-R S-Line Remote	WPF-SL-SHIELD Shield
	WH ¹ White			BMSBT Bi-Level Motion + Daylight Sensor -Bluetooth Control-(S-BMS-EXT-1-BT)				
	GRY ¹ Gray							
	CS ¹ Custom Color							

1. Standard quickship is bronze. Other colors are custom finishes

2. Sensors require remote for programming

Specs and model numbers are subject to change with or without notice.

FEATURES

Waterproof Gasket

1/2" Knockout



1/2" Knockout




TOP



BOTTOM

1/2" Knockout

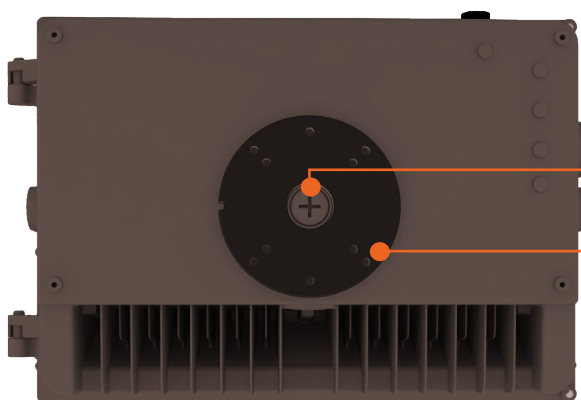

BACK


1/2" Knockout

Gasket





SIDE

3-CCT Selectable
 +
 3 Power Selectable



DIMENSIONS

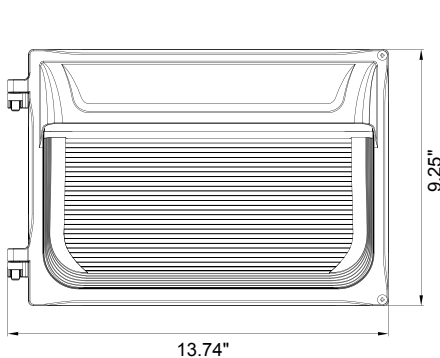

Slim Wall Pack: SL-Line


3-CCT + 5-Power Selectable



S-LINE-R



S-BMS-EXT-1
S-BMS-EXT-1-BT



WPF-SL-SHIELD

WALL PACK

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPF-SL-3P60-TRI-BZ-UNV-PC	120-277V	60/40/30w	3,900/5,200/ 7,800	30/40/50k	>80
LED-WPF-SL-3P120-TRI-BZ-UNV-PC	120-277V	120/100/80w	10,400/13,000/15,600	30/40/50k	>80
LED-WPF-SL-3P60-TRI-BZ-HV-PC	277-480V	60/40/30w	3,900/5,200/ 7,800	30/40/50k	>80
LED-WPF-SL-3P120-TRI-BZ-HV-PC	277-480V	120/100/80w	10,400/13,000/15,600	30/40/50k	>80

REMOTE CONTROL

Accessory Model	Description
S-LINE-R	Remote for S-LINE Series Sensors

HB-LINE-SENSORS

Model	Item Description	Voltage	Watts
S-BMS-EXT-1	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with LED WALLPACKS. 12V Aux REQD. (Remote Required)	12V	<1w
S-BMS-EXT-1-BT	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with Wallpacks. 12V Aux REQD. (Remote Required)	12V	<1w

SHIELD

Accessory Model	Description
WPF-SL-SHIELD	Cout off shield

Specs and model numbers are subject to change with or without notice.