

Full-Cutoff Wall Pack: FC-Line

3-CCT + 5-Power Selectable

Wall Packs



Detail Specifications:

- Finish: Bronze, Black, White, Custom finishes available
- IP Rating: Wet Location
- Impact Rating: IK08
- Beam Angle: Type III (Standard), II, IV available
- Chip: SMD 2835, R9 >50, CRI >80
- BUG: B3-U2-G2
- Operating Temperature: -40° - 122° F
- Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Full Cut-Off Dark Sky Compliant
- Photocell is included with an easy quick disconnect
- Instant-On to full brightness
- Select-n-Switch Technology: 3-CCT + 5-Power Selectable

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Five 1/2" knockouts: 1 one each side for convenient installation

Certifications:

- UL Listed for USA and CA
- DLC Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

WATT	LUMENS
16	2,320
30	4,350
32	4,640
48	6,960
60	8,700
64	9,280
80	11,600
90	13,050
120	17,400
150	21,750

Series

LED-WPFC-5P80-TRI

16/32/48/64/80W • 30/40/50k

LED-WPFC-5P150-TRI

30/60/90/120/150W • 30/40/50K

Finish¹

- BZ**
Bronze
(Standard)
- BL**
Black
- WH**
White
- GRY¹**
Gray
- CS¹**
Custom
Color

Voltage

- (blank)**
120-277V
- HV**
277-480V

Photocell PC

Photocell is included. Easy quick disconnect. (PC-3/4-3PIN-LV)

Optic

- (Blank)**
Type III
- T2**
Type II
- T4**
Type IV

Sensor²

- (Blank)**
No Sensor
- BMS**
Bi-Level Motion + Daylight Sensor (S-BMS-EXT-1)
- BMSBT**
Bi-Level Motion + Daylight Sensor Bluetooth Control (S-BMS-EXT-1-BT)

Emergency

- (Blank)**
No Emergency
- EMB**
Emergency Backup
- CEMB**
90 Minute Emergency Backup Cold Weather 4-120F

Surge Protector

- (Blank)**
6KV Built-In
- 20KV**
Surge Protector

Optional Accessories (Order Separately)

Remote for Sensors

- HB03R**
HB01DMS Remote
- S-LINE-R**
S-Line Remote

1. Standard quickship models shows on page 3.



2. Sensors require remote for programming

Specs and model numbers are subject to change with or without notice



FEATURES



DIMENSIONS

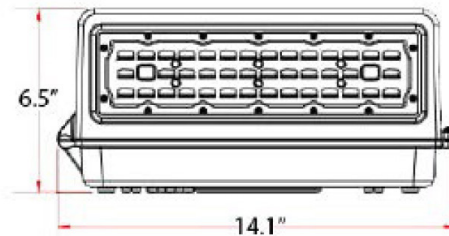

5P80

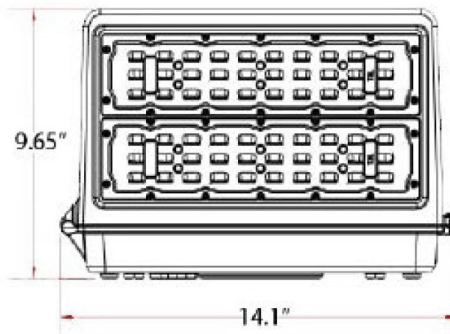

5P150




S-BMS-EXT-1
S-BMS-EXT-1-BT



HB03R



S-LINE-R



T2
T4

STANDARD QUICK SHIP MODELS

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPFC-5P80-TRI-BZ-PC	120-277V	16/32/48/64/80w	145 lm/w	30/40/50k	>80
LED-WPFC-5P80-TRI-BL-PC	120-277V	16/32/48/64/80w	145 lm/w	30/40/50k	>80
LED-WPFC-5P80-TRI-WH-PC	120-277V	16/32/48/64/80w	145 lm/w	30/40/50k	>80
LED-WPFC-5P80-TRI-BZ-HV-PC	277-480V	16/32/48/64/80w	145 lm/w	30/40/50k	>80
LED-WPFC-5P150-TRI-BZ-PC	120-277V	30/60/90/120/150w	145 lm/w	30/40/50k	>80
LED-WPFC-5P150-TRI-BL-PC	120-277V	30/60/90/120/150w	145 lm/w	30/40/50k	>80
LED-WPFC-5P150-TRI-WH-PC	120-277V	30/60/90/120/150w	145 lm/w	30/40/50k	>80

HB-LINE-SENSORS

Model	Item Description	Voltage	Watts
S-BMS-EXT-1	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with LED WALLPACKS. 12V Aux REQD. (Remote Required)	12V	<1w
S-BMS-EXT-1-BT	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with Wallpacks. 12V Aux REQD. (Remote Required)	12V	<1w

REMOTE CONTROL

Accessory Model	Description
HB03R	Remote for HB-Line Series
S-LINE-R	Remote for S-LINE Series Sensors

OPTIC LENS

Accessory Model	Description
WPFC-T-II	Type II
WPFC-T-IV	Type IV