

# Rotating Wall Pack: R-Line

## One or Two Modules

Wall Packs



WATT	LUMENS
25	3,600
40	4,890
60	8,280
80	10,875

BUG RATING	
25W	B2-US-G1
40W	B3-U3-G1
60W	B3-U3-G1
80W	B4-U3-G1

### Detail Specifications:

- Finish: Bronze, Custom finishes available
- IP Rating: Wet Location
- Impact Rating: IK08
- Beam Angle: 60°
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 122° F
- Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

### Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

### Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- 360° rotating heads, no tools needed
- Face Down: Cut-Off Dark Sky Compliant on 30K
- Instant-On to full brightness

### Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- Built in 10Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

### Mounting & Installation:

- Five 1/2" knockouts: 1 one each side for convenient installation

### Certifications:

- UL Listed for USA and CA
- DLC Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- IESNA LM-79 & LM-80 tests available
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Finish <sup>1</sup>	Photocell	Sensor	Emergency	Surge Protector
<b>LED-WPROT2-25WS-TRI</b> Single Module 30/40/50K	<b>BZ</b> Bronze	<b>(Blank)</b> No Photocell	<b>(Blank)</b> No Sensor	<b>(Blank)</b> No Emergency	<b>(Blank)</b> <b>10KV</b>
<b>LED-WPROT2-40WS-30K</b> Single Module 3000K	<b>(Standard)</b>	<b>PC</b> Button	<b>BMS</b> Bi-Level Motion + Daylight Sensor (S-BMS-EXT-1)	<b>EMB</b> Emergency Backup	<b>Built-In</b> <b>20KV</b>
<b>LED-WPROT2-40WS-40K</b> Single Module 4000K	<b>BL</b> <sup>1</sup> Black	<b>Photocell</b>	<b>BMSBT</b> Bi-Level Motion + Daylight Sensor Bluetooth Control (S-BMS-EXT-1-BT)		<b>Surge</b> Protector
<b>LED-WPROT2-40WS-50K</b> Single Module 5000K	<b>WH</b> <sup>1</sup> White				
<b>LED-WPROT2-60WD-TRI</b> Double Module 30/40/50K	<b>GRY</b> <sup>1</sup> Gray				
<b>LED-WPROT2-80WD-30K</b> Double Module 3000K	<b>CS</b> <sup>1</sup> Custom Color				
<b>LED-WPROT2-80WD-40K</b> Double Module 4000K					
<b>LED-WPROT2-80WD-50K</b> Double Module 5000K					
<b>LED-WPROT2-3P80WD-TRI</b> Double Module 40/60/80w 30/40/50K					

<sup>1</sup>. Standard quickship is bronze. Other colors are custom finishes

### Optional Accessories (Order Separately)

Remote for Sensors	Shield
<b>S-LINE-R</b> S-Line Remote	<b>WPROT-SHIELD</b> Shield for Rotating Wall Pack

Specs and model numbers are subject to change with or without notice.

**FEATURES**

Reliable Chips

Bronze Finish

Wall Pack Shield


Install Back Plate to Junction Box

Latch Main Body to Back Plate

Tighten Screws to Secure Fixture

Easy Installation

1/2" Knockouts



3-CCT Selectable



Optional Photocell  
 Dusk to Dawn



360° Rotation

**DIMENSIONS**



*Specs and model numbers are subject to change with or without notice.*

# Rotating Wall Pack: R-Line

## One or Two Modules



**S-LINE-R**




**PC-BTN-UNV-1/2"**



**HB01DMS-C**



**S-BMS-EXT-1**  
**S-BMS-EXT-1-BT**

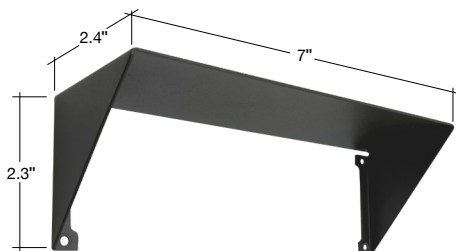

**WPROT-SHIELD**

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPROT2-25WS-TRI-BZ	120-277V	25w	3,600	30/40/50k	>80
LED-WPROT2-40WS-30K-BZ	120-277V	40w	4,890	3000k	>80
LED-WPROT2-40WS-40K-BZ	120-277V	40w	4,890	4000k	>80
LED-WPROT2-40WS-50K-BZ	120-277V	40w	4,890	5000k	>80
LED-WPROT2-3P80WD-TRI-BZ	120-277V	40/60/80w	4890/8280/10875	30/40/50k	>80
LED-WPROT2-60WD-TRI-BZ	120-277V	60w	8,280	30/40/50k	>80
LED-WPROT2-80WD-30K-BZ	120-277V	80w	10,875	3000k	>80
LED-WPROT2-80WD-40K-BZ	120-277V	80w	10,875	4000k	>80
LED-WPROT2-80WD-50K-BZ	120-277V	80w	10,875	5000k	>80

### REMOTE CONTROL

Accessory Model	Description
S-LINE-R	Remote for S-LINE Series Sensors

### PHOTOCELL

Accessory Model	Description
PC-BTN-UNV-1/2"	Button Photocell Universal for 1/2" Knockout

### HB-LINE-SENSORS

Model	Item Description	Voltage	Watts
HB01DMS-C	Bi Level Motion Sensor w/ Daylight Harvesting 1/2" Knockout - Includes Auxiliary	12V	<1w
S-BMS-EXT-1	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with LED WALLPACKS. 12V Aux REQD. (Remote Required)	12V	<1w
S-BMS-EXT-1-BT	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with Wallpacks. 12V Aux REQD. (Remote Required)	12V	<1w

### SHIELD

Model	Item Description
WPROT-SHIELD	Shield for Rotating Wall Pack

*Specs and model numbers are subject to change with or without notice.*