

Key Features & Benefits:

- Selectable Kelvin
2700K–3000K–3500K–4000K–5000K
- Triac Dimmable (120 VAC)
- 90 CRI
- Frosted Lens Produces Smooth, Diffused Light
- 5 Year Warranty

Project: _____

Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Wattage: 9 Watts
 Selectable Kelvin:
 2700K–3000K–3500K–4000K–5000K
 Lumen Output: Up to 800
 Efficacy (lm/W): Up to 89 Lumens per Watt
 Input Voltage: 120 VAC
 CRI: 90+
 Base: E26
 Operational Lifetime: 15,000 hrs
 Dimensions: Ø 2.36" x 4.33"




Ordering Guide:

ESL	TYPE	WATTS	GENERATION	SELECTABLE KELVIN	BASE
ESL	A19 (A19) A19 Lamp	9W (9W) 9 Watts	1 (1) 1st Generation	2750 (2750) 2700K–3000K–3500K–4000K–5000K	 (Blank) E26 Base

Catalog Data:

ITEM#	WATTAGE	WATTAGE EQUIVALENCY	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	DIMENSIONS
ESL-A19-6W-12750	6W	40W	2700K–3000K–3500K–4000K–5000K	480	80	Ø 2.36" x H 4.33"
ESL-A19-9W-12750	9W	60W	2700K–3000K–3500K–4000K–5000K	800	89	Ø 2.36" x H 4.33"
ESL-A19-11W-12750	11W	75W	2700K–3000K–3500K–4000K–5000K	1,100	100	Ø 2.36" x H 4.57"
ESL-A19-15W-12750	15W	100W	2700K–3000K–3500K–4000K–5000K	1,600	107	Ø 2.36" x H 4.57"
ESL-A19-9W-12750-GU24	9W	60W	2700K–3000K–3500K–4000K–5000K	800	89	Ø 2.36" x H 4.17"

Dimensions:

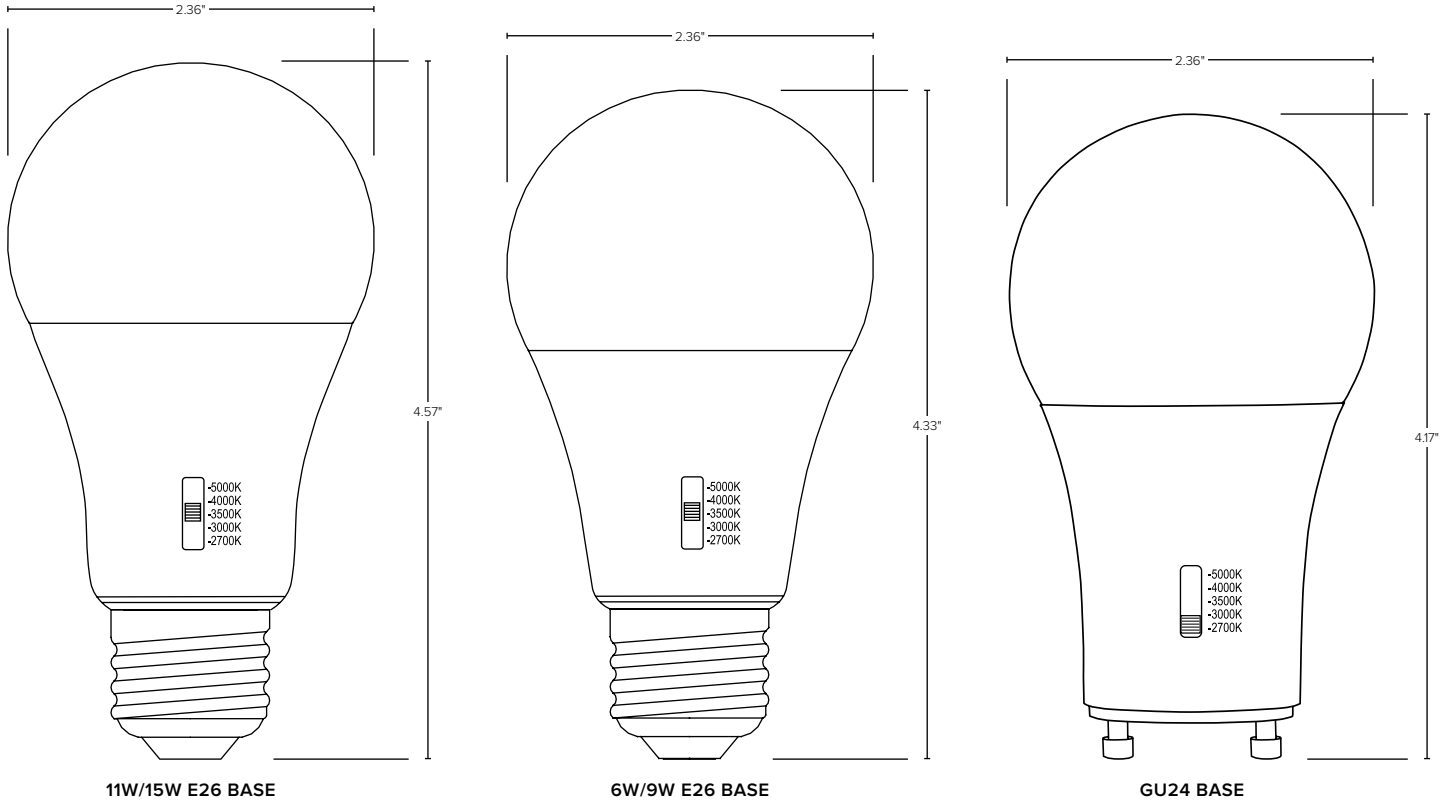

Compatible Dimmers:

COMPATIBLE DIMMERS

6674 LEVITON

DVCL-153P LUTRON

CTCL-153P LUTRON

TGCL-153P LUTRON

MAELV-600 LUTRON