

### Key Features & Benefits:

- 5CCT Field Selectable
- Compatible with 3" and 4" J Boxes
- Wet Location Rated
- 0–10V and Triac Dimmable
- T24 Compliant
- Easy Surface Mount Installation
- Optional Trim Kits\*

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_


Notes: \_\_\_\_\_

### Product Specifications:

Wattage: 14 Watts  
 Selectable Kelvin:  
 2700K–3000K–3500–4000K–5000K  
 Lumen Output: Up to 1,273 Lumens  
 Efficacy: Up to 98 lm/W  
 Input Voltage: 120–277 VAC  
 CRI: >90  
 Operating Temperature: 59°F to 122°F  
 Dimming: 120 VAC Triac & 120–277 VAC 0–10V  
 Battery Life: 90 Minutes  
 Operational Lifetime: 50,000 hrs  
 Battery Lifetime: 3 years when ambient temperature is between 50°F to 104°F  
 Dimensions: Ø 7.12" x H 1.18"



Easy Select Kelvin Switch on Backplate



**Multi-Volt — Dual Dimming**  
**120VAC & 120–277VAC 0–10V**  
**Integrated Battery Backup with**  
**Quick-Connect for Simple Replacement**



### Ordering Guide:


ESL	TYPE	SIZE	WATTAGE	GENERATION	SELECTABLE KELVIN	VOLTAGE	EMERGENCY
ESL	DDSK (DDSK) Decorative Disk	R7 (R7) Round 7"	14W (14W) 14 Watts	1 (1) 1st Generation	2750 (2750) 2700K–3000K– 3500K–4000K–5000K	MV (MV) 120–277 VAC Multi-Volt	EMG (EMG) Built-in EMG

### FIELD INSTALLED ACCESSORIES

ESL-DDSK-EMBAT	Replacement battery for EMG models only
<b>TRIM KITS</b>	
ESL-DDSK1-R5-Tff	5" DDSK field installable round trim kit*
ESL-DDSK1-S5-Tff	5" DDSK field installable square trim kit*
ESL-DDSK1-R7-Tff	7" DDSK field installable round trim kit*
ESL-DDSK1-S7-Tff	7" DDSK field installable square trim kit*
ESL-DDSK1-R9-Tff	9" DDSK field installable round trim kit*
ESL-DDSK1-S9-Tff	9" DDSK field installable square trim kit*
ESL-DDSK1-R11-Tff	11" DDSK field installable round trim kit*
ESL-DDSK1-S11-Tff	11" DDSK field installable square trim kit*

Finishes: (ff)=(MW) Field Paintable, (BK) Black, (BN) Brushed Nickel, (BZ) Bronze, (CP) Copper

\*Contact ESL Representative for more information regarding Trim Kit lead times.

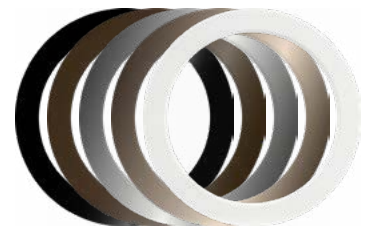

Field Installable Trim Rings Sold Separately:  
 Black, Bronze, Nickel, Copper, and Field Paintable

**Catalog Data:**

**LED DECORATIVE DISK—TRIAC DIMMING**

ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	CRI	INPUT VOLTAGE	DIMENSIONS
<b>5" ROUND</b>							
ESL-DDSK-R5-11W-12750	11W	2700K	704	62	90	120 VAC	Ø 5.63" x H 1.18"
		3000K	752	67			
		3500K	785	69			
		4000K	784	70			
		5000K	792	69			
<b>5" SQUARE</b>							
ESL-DDSK-S5-11W-12750	11W	2700K	670	59	90	120 VAC	5.6" x 5.6" x H 1.18"
		3000K	716	64			
		3500K	733	66			
		4000K	735	65			
		5000K	727	65			
<b>7" ROUND</b>							
ESL-DDSK-R7-14W-12750	14W	2700K	900	64	90	120 VAC	Ø 7.09" x H 1.18"
		3000K	962	69			
		3500K	1,004	72			
		4000K	1,035	74			
		5000K	1,004	73			
ESL-DDSK-R7-14W-12750-EMG	14W	2700K	1,078	78	90	120 VAC	Ø 7.08" x H 1.18"
		3000K	1,143	84			
		3500K	1,196	88			
		4000K	1,219	91			
		5000K	1,222	89			
<b>7" SQUARE</b>							
ESL-DDSK-S7-14W-12750	14W	2700K	862	62	90	120 VAC	7.11" x 7.11" x H 1.18"
		3000K	914	66			
		3500K	946	69			
		4000K	938	68			
		5000K	923	68			
ESL-DDSK-S7-14W-12750-EMG <sup>†</sup>	14W	2700K	1,027	75	90	120 VAC	7.11" x 7.11" x H 1.18"
		3000K	1,092	81			
		3500K	1,159	87			
		4000K	1,196	89			
		5000K	1,199	88			
<b>9" ROUND</b>							
ESL-DDSK-R9-20W-12750	20W	2700K	1,396	71	90	120 VAC	Ø 9.06" x H 1.18"
		3000K	1,476	75			
		3500K	1,568	80			
		4000K	1,576	80			
		5000K	1,569	80			
ESL-DDSK-R9-20W-12750-EMG	20W	2700K	1,558	78	90	120 VAC	Ø 9.05" x H 1.18"
		3000K	1,646	83			
		3500K	1,715	89			
		4000K	1,746	89			
		5000K	1,738	89			
<b>9" SQUARE</b>							
ESL-DDSK-S9-20W-12750	20W	2700K	1,346	68	90	120 VAC	9.08" x 9.08" x H 1.18"
		3000K	1,451	73			
		3500K	1,503	73			
		4000K	1,488	76			
		5000K	1,451	76			
ESL-DDSK-S9-20W-12750-EMG <sup>†</sup>	20W	2700K	1,371	72	90	120 VAC	9.08" x 9.08" x H 1.18"
		3000K	1,437	77			
		3500K	1,492	81			
		4000K	1,512	81			
		5000K	1,470	78			
<b>11" ROUND</b>							
ESL-DDSK-R11-25W-12750	25W	2700K	1,768	71	90	120 VAC	Ø 11.0" x H 1.18"
		3000K	1,866	75			
		3500K	2,005	81			
		4000K	2,009	81			
		5000K	2,004	81			
<b>11" SQUARE</b>							
ESL-DDSK-S11-25W-12750	25W	2700K	1,760	71	90	120 VAC	11.04" x 11.02" x H 1.18"
		3000K	1,887	76			
		3500K	1,966	80			
		4000K	1,924	79			
		5000K	1,874	79			

<sup>†</sup>Contact your representative for lead times

<sup>†</sup>Accessories Sold Separately



**Catalog Data:**

**LED DECORATIVE DISK—DUAL DIMMING MULTI-VOLT**



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	CRI	INPUT VOLTAGE	DIMENSIONS
<b>5" ROUND MULTI-VOLT</b>							
ESL-DDSK-R5-11W-12750-MV	11W	2700K	883	81	90	120–277VAC	Ø 5.59" x H 1.18"
		3000K	917	85			
		3500K	953	90			
		4000K	963	90			
		5000K	953	88			
<b>5" SQUARE MULTI-VOLT</b>							
ESL-DDSK-S5-11W-12750-MV	11W	2700K	701	65	90	120–277VAC	5.6" x 5.6" x H 1.18"
		3000K	738	70			
		3500K	772	74			
		4000K	785	75			
		5000K	767	72			
<b>7" ROUND MULTI-VOLT</b>							
ESL-DDSK-R7-14W-12750-MV	14W	2700K	1,135	84	90	120–277VAC	Ø 7.08" x H 1.18"
		3000K	1,203	91			
		3500K	1,241	94			
		4000K	1,273	98			
		5000K	1,264	95			
ESL-DDSK-R7-14W-12750-MV-EMG	14W	2700K	1,145	85	90	120–277VAC	Ø 7.08" x H 1.18"
		3000K	1,204	92			
		3500K	1,255	98			
		4000K	1,273	96			
		5000K	1,267	97			
<b>7" SQUARE MULTI-VOLT</b>							
ESL-DDSK-S7-14W-12750-MV	14W	2700K	980	73	90	120–277VAC	7.11" x 7.11" x H 1.18"
		3000K	1,039	78			
		3500K	1,078	83			
		4000K	1,088	83			
		5000K	1,058	79			
ESL-DDSK-S7-14W-12750-MV-EMG <sup>†</sup>	14W	2700K	1,007	73	90	120–277VAC	7.11" x 7.11" x H 1.18"
		3000K	1,085	80			
		3500K	1,132	85			
		4000K	1,148	86			
		5000K	1,126	83			
<b>9" ROUND MULTI-VOLT</b>							
ESL-DDSK-R9-20W-12750-MV	20W	2700K	1,660	88	90	120–277VAC	Ø 9.05" x H 1.18"
		3000K	1,735	93			
		3500K	1,789	97			
		4000K	1,854	101			
		5000K	1,843	99			
ESL-DDSK-R9-20W-12750-MV-EMG <sup>†</sup>	20W	2700K	1,665	86	90	120–277VAC	Ø 9.05" x H 1.18"
		3000K	1,750	93			
		3500K	1,832	98			
		4000K	1,869	98			
		5000K	1,864	98			
<b>9" SQUARE MULTI-VOLT</b>							
ESL-DDSK-S9-20W-12750-MV <sup>†</sup>	20W	2700K	1,462	80	90	120–277VAC	9.08" x 9.08" x H 1.18"
		3000K	1,542	86			
		3500K	1,608	91			
		4000K	1,616	91			
		5000K	1,571	86			
ESL-DDSK-S9-20W-12750-MV-EMG <sup>†</sup>	20W	2700K	1,329	72	90	120–277VAC	9.08" x 9.08" x H 1.18"
		3000K	1,395	77			
		3500K	1,461	82			
		4000K	1,485	83			
		5000K	1,458	80			
<b>11" ROUND MULTI-VOLT</b>							
ESL-DDSK-R11-25W-12750-MV <sup>†</sup>	25W	2700K	2,147	94	90	120–277VAC	Ø 11.0" x H 1.18"
		3000K	2,249	100			
		3500K	2,315	104			
		4000K	2,367	106			
		5000K	2,343	103			
<b>11" SQUARE MULTI-VOLT</b>							
ESL-DDSK-S11-25W-12750-MV <sup>†</sup>	25W	2700K	2,024	87	90	120–277VAC	11.04" x 11.04" x H 1.18"
		3000K	2,126	93			
		3500K	2,210	98			
		4000K	2,245	99			
		5000K	2,207	95			

<sup>†</sup>Contact your representative for lead times

<sup>†</sup>Accessories Sold Separately



**Dimensions:**

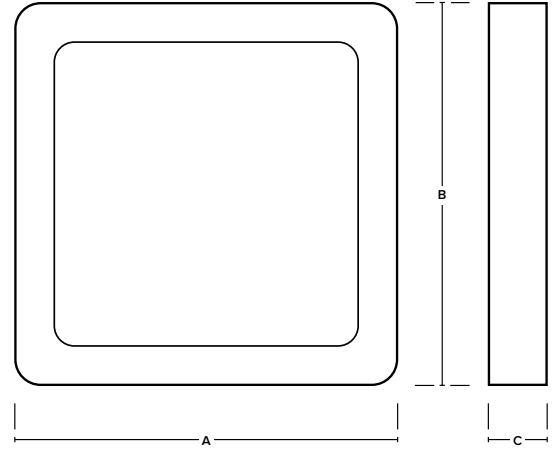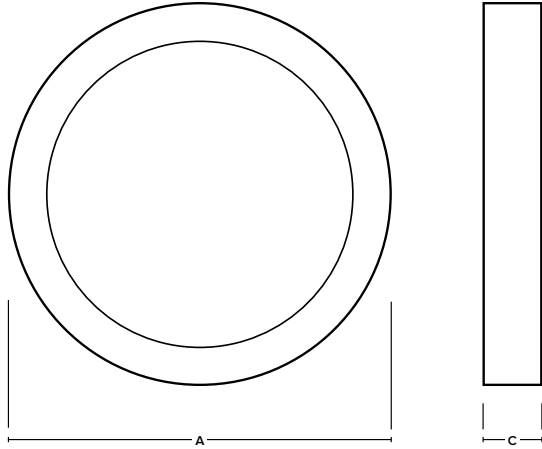

ITEM#	DIMENSIONS			WEIGHT (LBS)
	A	B	C	
<b>5" ROUND</b>				
ESL-DDSK-R5-11W-12750	Ø 5.63"	–	1.18"	.63
ESL-DDSK-R5-11W-12750-MV	Ø 5.59"	–	1.18"	.70
<b>7" ROUND</b>				
ESL-DDSK-R7-14W-12750	Ø 7.09"	–	1.18"	.86
ESL-DDSK-R7-14W-12750-EMG	Ø 7.08"	–	1.18"	1.28
ESL-DDSK-R7-14W-12750-MV	Ø 7.08"	–	1.18"	.95
ESL-DDSK-R7-14W-12750-MV-EMG	Ø 7.08"	–	1.18"	1.3
<b>9" ROUND</b>				
ESL-DDSK-R9-20W-12750	Ø 9.06"	–	1.18"	1.25
ESL-DDSK-R9-20W-12750-EMG <sup>†</sup>	Ø 9.05"	–	1.18"	1.67
ESL-DDSK-R9-20W-12750-MV	Ø 9.05"	–	1.18"	1.29
ESL-DDSK-R9-20W-12750-MV-EMG <sup>†</sup>	Ø 9.05"	–	1.18"	1.69
<b>11" ROUND</b>				
ESL-DDSK-R11-25W-12750	Ø 11.0"	–	1.18"	1.68
ESL-DDSK-R11-25W-12750-MV <sup>†</sup>	Ø 11.0"	–	1.18"	1.74

<sup>†</sup>Contact your representative for lead times

ITEM#	DIMENSIONS			WEIGHT (LBS)
	A	B	C	
<b>5" SQUARE</b>				
ESL-DDSK-S5-11W-12750	5.6"	5.6"	1.18"	.75
ESL-DDSK-S5-11W-12750-MV	5.6"	5.6"	1.18"	.78
<b>7" SQUARE</b>				
ESL-D DSK-S7-14W-12750	7.11"	7.11"	1.18"	1.03
ESL-DDSK-S7-14W-12750-EMG <sup>†</sup>	7.11"	7.11"	1.18"	1.44
ESL-DDSK-S7-14W-12750-MV	7.11"	7.11"	1.18"	1.07
ESL-DDSK-S7-14W-12750-MV-EMG <sup>†</sup>	7.11"	7.11"	1.18"	1.46
<b>9" SQUARE</b>				
ESL-DDSK-S9-20W-12750	9.08"	9.08"	1.18"	1.56
ESL-DDSK-S9-20W-12750-EMG	9.08"	9.08"	1.18"	2.09
ESL-DDSK-S9-20W-12750-MV <sup>†</sup>	9.08"	9.08"	1.18"	1.61
ESL-DDSK-S9-20W-12750-MV-EMG <sup>†</sup>	9.08"	9.08"	1.18"	2.11
<b>11" SQUARE</b>				
ESL-DDSK-S11-25W-12750	11.04"	11.04"	1.18"	2.12
ESL-DDSK-S11-25W-12750-MV <sup>†</sup>	11.04"	11.04"	1.18"	2.2

<sup>†</sup>Contact your representative for lead times

**DDSK Compatible Dimmers:**

NON-EMG TRIAC
Lutron DVCL-153P
Lutron LECL-153PH
Lutron LECL-153PH
Lutron CTCL-153PH
Leviton 6672
Leviton 6674
Leviton IPSD6
Leviton DSL06
Leviton IPL06
Leviton DSM10

EMG TRIAC
Lutron DVCL-303
Lutron LECL-153PH
Lutron CT-600P
Lutron CTCL-153PH
Leviton 6672
Leviton 6674
Leviton DSL06
Leviton IPL06
Leviton DSM10
Leviton PD-6WCL

**DDSK-MV Compatible Dimmers:**

REGULAR AND EMG TRIAC
Lutron DVCL-153P Diva
Lutron DVWCL-153PH Diva
Lutron LECL-153PH-WH Lunea
Lutron TGCL-153PH
Lutron CTCL-153PH Skylark
Leviton 6672
Leviton 6674
Leviton IPSD6
Leviton DSL06
Leviton IPL06
Leviton DSM10
Cooper TAL06P-C2