

**Performance Overview:**

Wattage Adjustable: 8W, 12W or 15W  
 Lumen Output: Up to 1,901 Lumens  
 Efficacy (lm/W): Up to 130 Lumens per Watt  
 Kelvin Adjustable: 3000K, 4000K or 5000K  
 IP Rating: IP65  
 CRI: >80



Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Catalog #: \_\_\_\_\_  
 Notes: \_\_\_\_\_




**Key Features & Benefits:**

- Two-piece Aluminum Housing with Easy Driver
- Comes Standard with Photocell
  - Photocell offers quick disconnect if not needed
- 0-10V dimming
- Kelvin Adjustable ( 3000K, 4000K, 5000K)
- Wattage Adjustable - Two Models
  - 8 Watt | 12 Watt | 15 Watt
  - 15 Watt | 20 Watt | 30 Watt



**ADJUSTABLE  
KELVIN & WATTAGE**

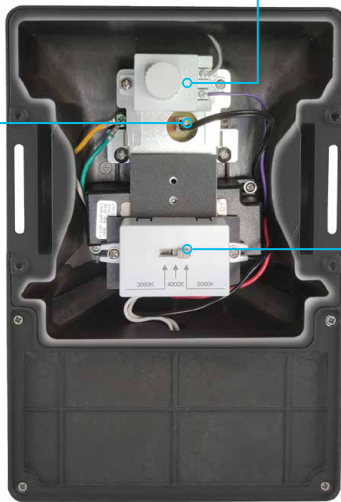

Available in Bronze or White Finishes

**Ordering Guide:**

<b>ESL</b>	<b>MWP</b>	<b>0815W</b>	<b>1</b>	<b>3050</b>	
ESL	TYPE	WATTAGE ADJUSTABLE*	GENERATION	KELVIN ADJUSTABLE*	FINISH
	MWP (Mini Wall Pack)	8W   12W   15W	1 (1st Generation)	3050 (3000, 4000, 5000 Kelvin)	BZ (Bronze) WH (White)

\*Default fixture settings are set to highest wattage and 5000K

†Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).

### Construction:

- Precision Die-Cast Aluminum Housing
- Weathertight LED Driver Housing
- Continuous Gasket Seal
- Weight: 2.29lbs

### Optical:

- Precision Engineered Optical Lens
- Diffused Acrylic Impact Resistant Lens
- UV Protection

### Electrical:

- Input Voltage Options: 120-277 VAC
- Life: >60,000 hours
- Dimming: 0-10V Dimmable
- Operating Temperature: -40°F to 113°F (-40°C to 45°C)

### Catalog Data:


KELVIN ADJUSTABLE												
ESL	TYPE	WATTAGE	GENERATION	3000K (30)			4000K (40)			5000K (50)		
				LUMENS*	LPW	DLC QPL	LUMENS*	LPW	DLC QPL	LUMENS*	LPW	DLC QPL
ESL-MWP-0815W-1				1,901	130	PLTGVQTC1Q26	1,901	130	PLTGVQTC1Q26	1,901	130	PLTGVQTC1Q26

\* Lumens shown are at highest wattage output

KELVIN ADJUSTABLE												
ESL	TYPE	WATTAGE	GENERATION	3000K (30)			4000K (40)			5000K (50)		
				LUMENS*	LPW	DLC QPL	LUMENS*	LPW	DLC QPL	LUMENS*	LPW	DLC QPL
ESL-MWP-1530W-1				3,724	131	PLOS5F7JQTI	3,724	131	PLOS5F7JQTI	3,724	131	PLOS5F7JQTI

\* Lumens shown are at highest wattage output

### Dimensions:

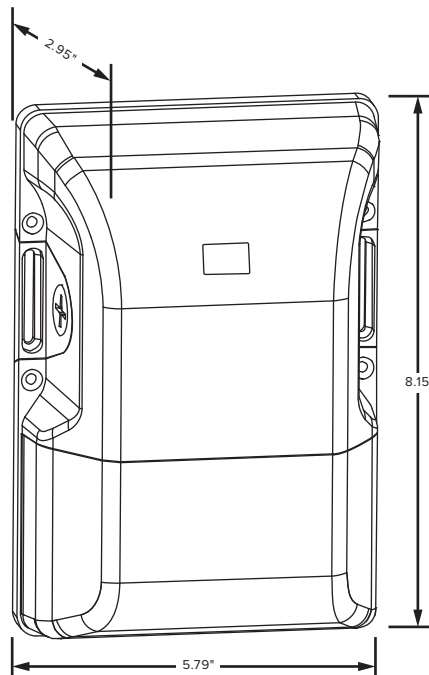

### Electrical Load - Standard Voltage:

SYSTEM WATTS	INPUT CURRENT				INPUT VOLTAGE	INPUT FREQUENCY	POWER FACTOR	THD	OPERATING TEMPERATURE	DIMMING
	120 VAC	208 VAC	240 VAC	277 VAC						
8	0.07	0.04	0.03	0.03	120-277 VAC	50/60 Hz	≥0.9	≤20%	-40°F to 113°F (-40°C to 45°C)	0-10V
12	0.10	0.06	0.05	0.04						
15	0.13	0.07	0.06	0.05						
20	0.17	0.10	0.08	0.07						
30	0.25	0.14	0.13	0.11						

### Light Distribution:

