



# UNDERCABINET LIGHTING

PRO-SERIES LED

3000K LEDs, DIMMABLE

**UPLED09, UPLED14,  
UPLED22 and UPLED30**

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_



## PRODUCT DESCRIPTION

The Pro-Series LED modular series with integral electronic driver operates 3000K LEDs for maintenance free 50,000 hour life using 1/6 the energy and virtually no heat when compared to halogen & xenon. Pro-Series LED fixtures are optimized for fast permanent installation, mounting either flush to the rear backsplash or to the front lip of cabinetry to suit project conditions and homeowner preference. Pro-Series LED fixtures are environmentally friendly and contain no harmful mercury. 5-year limited warranty.

## PRODUCT SPECIFICATIONS

**LEDs** Utilizes warm-white 3000K LEDs tightly binned to within a 2-step MacAdam ellipse for superb color consistency • Light output equivalent to Pro-Series Halogen & Pro-Series Xenon fixtures • Provides 50,000 hour service life • 80 CRI minimum.

**Driver** Integral electronic 120-volt constant current driver is accessible without having to remove fixture • Dimmable with most incandescent, magnetic low voltage or electronic low voltage wall box dimmers • For a list of compatible dimmers, refer to next page.

**Housing** Slim 1" profile • Modular plug-together design • Extruded Aluminum • Designer white, black, brushed bronze, or brushed silver.

**Diffuser** Clear prismatic tempered glass lens for maximum light transmission • Reverse-angled to minimize perceived brightness.

**Switch** Available with or without convenient integral On/Off rocker switch.

**Optional Integral Occupancy Sensor** 22" and 30" are available with Passive Infrared (PIR) Occupancy Sensor. The PIR sensor has a field adjustable time delay that can be set from 30 sec. to 30 min. All additional luminaires connected to the luminaire with occupancy sensor will be controlled by the single sensor.

**Labels** UL Listed.

## INSTALLATION

UPLED Series fixtures offer several convenient methods for installation and can be installed as direct wire or portable luminaires. Fixtures may be mounted flush to the backsplash or up against the front lip of the cabinetry using captive mounting screws.

**Direct Wire** The UPLED14, UPLED22, and UPLED30 are optimized with a center rear wiring access compartment and push-in electrical connectors for quick electrical connection using non-metallic or armored cable • The UPLED14, UPLED22, and UPLED30 also feature multiple off-center knockouts and are supplied with die cast fittings for 3/8" flexible metal conduit • Optional direct-wire modules sold separately supplied with a jumper cord to bring power to the fixture, is also available to facilitate code compliant installation of fixture at the front end of cabinetry • Please note that if direct wiring is required for the UPLED09, a direct wire module must be utilized.


**Portable** To install the UPLED14, UPLED22, or UPLED30 as a portable fixture, use the optional 3-wire grounded cord & plug (ULH-CP sold separately) or specify -CP6 option. Note: UPLED09 cannot be wired with ULH-CP.

**Electrically Connecting Multiple Fixtures** Connect multiple fixtures for up to 5 amps maximum combined operating current • Fixtures may be electrically joined together using either the straight joiner connector supplied with each fixture or the optional JC3 jumper cords • See accessories table for lengths and colors. See engineering data table for input current draw of each fixture size.

## ENGINEERING DATA

	UPLED09	UPLED14	UPLED22	UPLED30
Total input power (watts)	3.2	5.6	8.1	10.7
Total Operating AMPS	.03	.05	.07	.10
Lumens	150	299	454	601
Lumens/watt	47	53	56	56


## DIMENSIONS

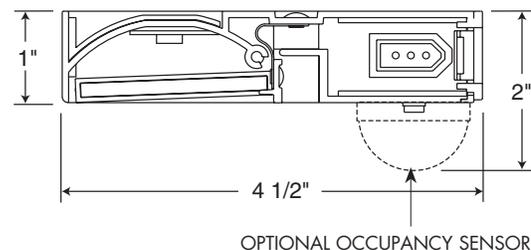

## PRO-SERIES LED 5 MINUTE DIRECT-WIRE INSTALLATION FOR UPLED14, UPLED22 & UPLED30 ONLY



**Step 1** Attach supply wires to rear access cover.



**Step 2** Connect supply wires to fixture leads using push-in connectors.



**Step 3** Mount fixture to cabinet bottom using captive mounting screws.

# UNDERCABINET LIGHTING

PRO-SERIES LED  
3000K LEDs, DIMMABLE

## UPLED09, UPLED14, UPLED22 and UPLED30

### ORDERING INFORMATION

**LED Ordering Example:** UPLED22-OCN-BL-CP6

LED Fixture	Control Options	Finish	Direct Wire/Portable
<b>UPLED09</b> 9" Pro-Series LED	<b>Blank</b> Includes On/Off Rocker Switch	<b>WH</b> Designer White	<b>Blank</b> Direct Wire
<b>UPLED14</b> 14" Pro-Series LED	<b>NS</b> No Rocker Switch	<b>BL</b> Black	<b>CP6</b> <sup>(2)</sup> Portable w/ 6' Cord & Plug
<b>UPLED22</b> 22" Pro-Series LED	<b>OC</b> <sup>(1)</sup> Occupancy Sensor w/ switch	<b>BZ</b> Brushed Bronze	
<b>UPLED30</b> 30" Pro-Series LED	<b>OCN</b> <sup>(1)</sup> Occupancy Sensor w/o switch	<b>SL</b> Brushed Silver	

<sup>(1)</sup> Occupancy Sensor is available on UPLED22 and UPLED30 only



<sup>(2)</sup> UL Listed as portable fixture when supplied from factory with cord and plug

### ACCESSORIES


Catalog No.	Description
<b>JC3-8-WH,-BL</b>	8" Jumper Cord
<b>JC3-17-WH,-BL</b>	17" Jumper Cord
<b>JC3-26-WH,-BL</b>	26" Jumper Cord
<b>ULH-CONN</b>	3/8" Miniature Die-Cast Electrical Connector
<b>ULH-CP-WH,-BL</b>	3-Wire Grounded Cord & Plug
<b>ULH-DWMOC-WH,-BL</b>	Direct Wire Occupancy Sensor Module
<b>ULH-DWMOCRS-WH,-BL</b>	Direct Wire Occupancy Sensor Module w/ Rocker Switch
<b>ULH-DWM-WH,-BL</b>	Direct Wire Module



ULH-DWMOCRS  
ULH-DWMOC

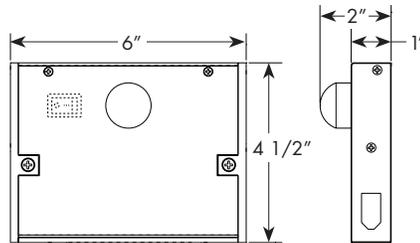

ULH-DWM



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925  
220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064  
Visit us at [www.junolightinggroup.com](http://www.junolightinggroup.com)

Printed in U.S.A. ©2014 Juno Lighting, LLC.


# UNDERCABINET LIGHTING

PRO-SERIES LED  
3000K LEDs, DIMMABLE

## UPLED09, UPLED14, UPLED22 and UPLED30

### LIGHTING APPLICATION DATA

#### FOOTCANDLES ON HORIZONTAL WORK SURFACE

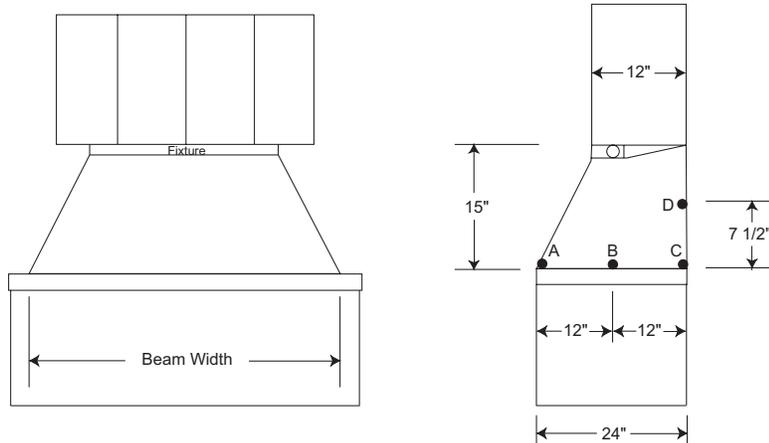

Footcandles					
Catalog #	* Beam Width	A	B	C	D
UPLED09	20	15.7	45.1	23.3	20
UPLED14	23	31.4	86	44.8	36.2
UPLED22	28	40.9	108	61.2	48.9
UPLED30	33	50.1	130	76.1	55.9

\* Beam width defined as 50% of maximum footcandles  
Fixture mounted at front lip of cabinet  
Rear wall reflectance 50%  
Counter Surface Reflectance 20%

### DIMMER COMPATIBILITY

Dimmable with most standard incandescent, magnetic low voltage or electronic low voltage dimmers. Dimming range depends on dimmer model. Compatible dimmers include but are not limited to the following Juno qualified dimmers listed below. Note: Due to the low wattage of UPLED09, it is recommended to combine this luminaire on a dimmer with at least one additional luminaire for best dimming performance.

#### INCANDESCENT AND MAGNETIC LOW VOLTAGE DIMMERS

##### Lutron® Model Numbers:

Glyder® GLV Series\*  
Diva® DV/DVLV Series  
Ariadni® AY Series  
Skylark® S Series  
Ceano® CNLV Series\*  
Nova T☆® NTLV Series\*

##### Leviton® Model Numbers:

Trimatron #6681

#### ELECTRONIC LOW VOLTAGE DIMMERS

##### Lutron® Model Numbers:

Nova T☆® NTELV Series  
Skylark® SELV Series\*  
Diva® DVELV Series  
Faedra® FAELV Series\*  
Spacer System® SPSELV Series\*

##### Leviton® Model Numbers:

Illumatech® IPE04 Series

(Dimmer has manual trim adjustment for low end of dimming range to achieve 5% dimming)

#### Whole House Integrated Control Systems:

Schneider Electric C-Bus SLC5504TD4A\*  
Lutron® Homeworks® QS HQRD-6NA\*  
Lutron® Radio RA2® RRD-6NA\*  
Lutron® Radio RA2® RRD-10ND\*

\*Juno recommended dimmers



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925  
220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064  
Visit us at [www.junolightinggroup.com](http://www.junolightinggroup.com)

Printed in U.S.A. ©2014 Juno Lighting, LLC.