



PROJECT	DATE
TYPE	CATALOG #

## LED CANDLE LAMP

2W CANDLE BASE (12V)

**LED-CAN-2W-12V-27K**

### KEY FEATURES

- DESIGNED FOR OUTDOOR USE IN A FULLY SEALED FIXTURE
- 12V TO FIT EXISTING LOW VOLTAGE SYSTEMS
- 360° BEAM
- 20W INCANDESCENT REPLACEMENT
- 1 YEAR LIMITED WARRANTY



### PRODUCT SPECIFICATIONS

BASE	E12 (CANDLE BASE)
VOLTAGE	12V AC/DC
DIMMABLE	YES+

### STEP 1

#### LED LAMP CONFIGURATION

**LED-CAN-2W-12V-27K**


#### LED WATTAGE

2W 100 LM


#### KELVIN TEMPERATURE

27K 2700K

#### KELVIN COLOR OPTION



#### DIMENSIONS

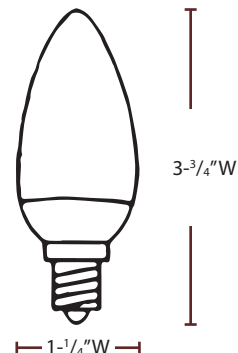

+PRIMARY SIDE DIMMING: Requires LED magnetic low voltage (MLV) dimmable transformer and compatible LED dimmer (MLV) - Primary Side or Lightcraft 12V in-line dimmer.  
 For more information see installation guidelines.  
 Fully tested with Lutron Diva (DVLV-600P) dimmer and Lightcraft dimmable transformers and LED lamps.

+LOW VOLTAGE SIDE DIMMING: Requires Lightcraft 12V In Line Dimmer