

| | | | | | |
|-------------|--|-----------|--|------|--|
| Project | | Catalog # | | Type | |
| Prepared by | | Notes | | Date | |



Lumière

Cambria 203

LED / Halogen
Accent / Flood

Typical Applications

- Hospitality • Commercial Landscape • Outdoor Area/Site • Residential
- Architectural

Interactive Menu

- Order Information [page 2](#)
- Cambria 203 MR16 Halogen Photometric Data [page 3](#)
- Cambria 203 LED Photometric Data [page 4](#)
- Product Warranty

Product Certification




Product Features



Top Product Features

- 340° tilt, 360° rotation
- Precision-machined aluminum, brass, bronze, copper or stainless steel
- Stainless steel hardware
- Siphon Protection System (S.P.S.)
- Holds up to three optical accessories
- Three-year warranty

Dimensions

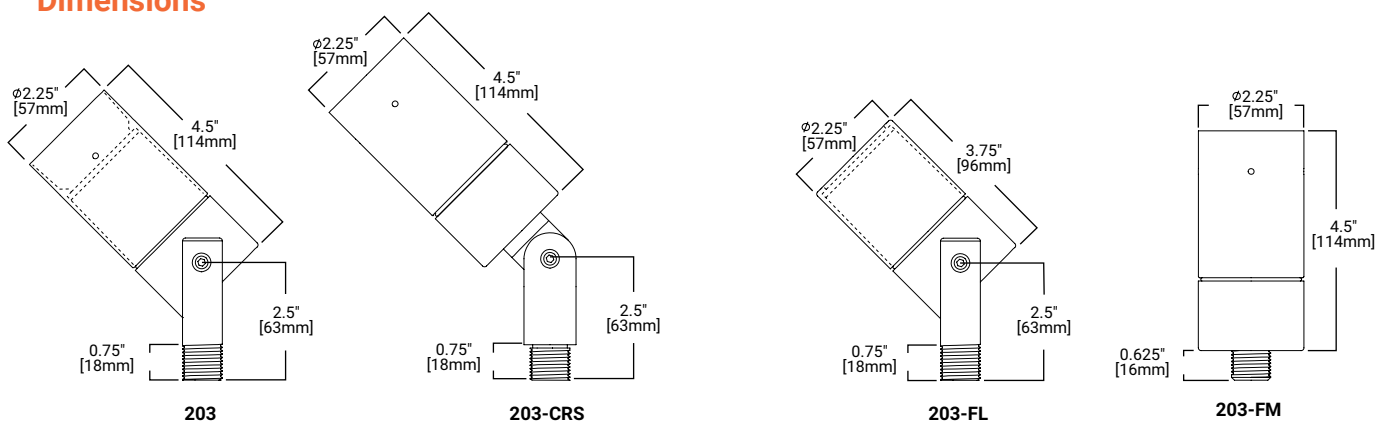

TECHNICAL DATA
8W LED, L70/60,000 hours at 25°C
Low Voltage: 50W Halogen MR16

Order Information


SAMPLE ORDER NUMBER: 203-FL-50MR16-12-NSS

| Domestic Preferences | Series | Construction | Source (for LED, select from each column and combine) | Voltage | Finish |
|--|--|--|--|--------------|---|
| [Blank] =Standard BAA =Buy American Act | 203=LED or MR16 Cambria Accent Fixture | ___=Standard Side Swivel Stem, 1/2" NPS CRS =Center Rear Swivel Stem, 1/2" NPS FM =Rear Flush Mount, 1/2" NPS FL =Flush Lens, Side Swivel Stem, 1/2" NPS | 50MR16 =50W max. Halogen MR16 (lamp not included) | 12=12V | Painted BK =Black BZ =Bronze CS =City Silver VE =Verde WT =White Premium Finish NBR =Natural Brass NCP =Natural Copper NBZ =Natural Bronze* NSS =Natural Stainless Steel |
| | | | 8LED =8W LED 27 =2700K 30 =3000K 40 =4000K* | | |
| | | | 5LED =5W LED AM =Amber* (585-595nm) | | |
| Notes (1) Only product configurations with this designated prefix are built to be compliant with the Buy American Act of 1933 (BAA). Please refer to DOMESTIC PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. | Notes | Notes | Notes * Not Title 20 compliant. | Notes | Notes * For natural bronze ROHS material consult factory. |

Optical Accessories - Order Separately

| Filters (2.00" Diameter) | Optical Lenses (2.00" Diameter) | Optical Louvers |
|--|---|---|
| F71 =Peach Dichroic F72 =Amber Dichroic F73 =Green Dichroic F74 =Medium Blue F75 =Yellow Dichroic F76 =Red Dichroic F77 =Dark Blue Dichroic F78 =Light Blue Dichroic F79 =Neutral Density Dichroic F80 =Magenta Dichroic F22 =Red Color F33 =Blue Color F44 =Green Color F55 =Yellow Color F66 =Mercury Vapor | LSL =Linear Spread Lens (elongates standard beam spread) DIF =Diffused lens (provides even illumination) OSL =Overall Spread Lens (increases standard beam spread) | LVR =45° Hex Cell Louver (reduces glare) |
| Notes (2) Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information. | Notes | Notes |

Lamp or LED Module Replacement

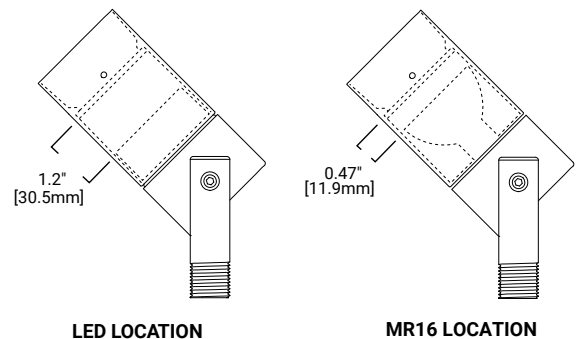

Mounting Accessories - Order Separately

| Ground Mounting | Surface / Wall Mounting | Low Voltage Tree Mounting |
|--|--|---|
| GS01 =1-1/2" x 6-3/4" (38mm x 171mm) cast zinc ground spike GS03 =2-3/8" x 6-5/8" (960mm x 168mm) aluminum ground spike with integral 12V wiring compartment. Specify powder paint finish (BK,BZ,CS,VE,WT) GS04 =1" x 16-1/2" (25mm x 419mm) aluminum ground spike with integral 12V wiring compartment. Specify powder paint finish (BK,BZ,CS,VE,WT) GS05 =1" x 16-1/2" (48mm x 438mm) black polycarbonate ground spike with 2"-13" height adjustment - requires fixture with extended stem. GS08 =1-7/8" x 8" (48mm x 203mm) black ABS ground spike GS13 =3-3/4" x 4-1/2" (95mm x 114mm) brass/stainless steel 3 prong ground spike | FS1 =2-7/8" x 4-5/8" (73mm x 117mm) rectangular wall plate or box cover with single 1/2 NPS mounting hole FS2 =2-7/8" x 4-5/8" (73mm x 117mm) rectangular wall plate or box cover with dual 1/2 NPS mounting holes RS1 =4-1/2" (144mm) machined aluminum standard round wall plate with single 1/2 NPS mounting hole RS2 =4-1/2" (114mm) machined aluminum standard round wall plate with single 1/2 NPS mounting hole TM01 =2-3/16" x 1-1/2" (71mm x 38mm) round mount for installation on trees or other wood surfaces with 1/2 NPS mounting hole TM05 =3-7/8" x 2" (98mm x 51mm) rectangular tree/surface mount with wiring compartment and single 1/2 NPS mounting hole | TM04 =2-1/2" x 4-1/4" (64mm x 108mm) expanding tree strap with self adjusting tension release for one fixture mount. Designed for a maximum tree diameter of 24" (610mm) TM04-2 =two fixture mount TM04-3 =three fixture mount TM04-4 =four fixture mount TR07 =tree friendly ring with adjustable stand-offs. Accommodates 18"-24" (457mm - 610mm) tree diameter TR07-2 =two fixture mount TR07-3 =three fixture mount TR07-4 =four fixture mount TR07-6 =six fixture mount |
| Notes (3) Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information | Notes | Notes (4) Available in galvanized stainless steel finish only |

Product Specifications

Material

- Housing, hood and mounting stem are precision-machined from corrosion-resistant billet stock 6061-T6 aluminum, C360 brass, C932 bronze*, C110 copper or 303/304 stainless steel

Finish

- Fixtures constructed from 6061-T6 aluminum are double protected by an ROHS* compliant chemical film undercoating and polyester powdercoat paint finish, surpassing the rigorous demands of the outdoor environment
- A variety of standard colors are available

Brass, Bronze*, Copper or Stainless Steel

- Fixtures constructed from brass, bronze*, copper or stainless steel are left unpainted to reveal the natural beauty of the material
- Brass, bronze* and copper will patina naturally over time

Hood

- Hood is removable for easy relamping and accepts up to three internal accessories at once (lenses, louvers, filters) to achieve multiple lighting effects
- Model 203, 203-CRS & 203-FM: Weep holes prevent water and mineral stains from collecting on the lens, even in the straight-up position
- Model 203-FL: The flush lens design reduces fixture length, minimizes debris collection and prevents water and mineral stains from collecting on the lens

Gasket

- Housing and hood are sealed with a high

temperature silicone o-ring gasket to prevent water intrusion

Lens

- Tempered glass lens, factory sealed with high temperature adhesive to prevent water intrusion and breakage due to thermal shock

Mounting Stem

- Model 203 and 203-FL include fully adjustable side-mounted swivel stem, providing 340° tilt and 360° rotation for easy aiming
- Center rear swivel (203-CRS) or stationary rear flush mount (203-FM) models are also available
- All models include 1/2" NPS threaded male fitting
- Stainless steel aim-locking mechanisms are standard (not available on 203-FM)
- Lumière's exclusive Siphon Protection System (S.P.S.) prevents water from siphoning into the fixture through its own lead wires

Hardware

- Stainless steel hardware is standard to provide maximum corrosion-resistance

Socket

- Ceramic socket with 250° C Teflon® coated lead wires and GU5.3 bi-pin base.

Electrical

- Remote 12V transformer required (not included)
- Initial power draw on LED equipped fixtures is 12 watts

- When sizing transformer use 12 watts per LED fixture
- Nominal power draw after start up is 8 watts
- LEDs are more voltage sensitive than standard halogen MR16 lamps
- The LED module is designed to operate within the range 12V +/- 1.2V. Any less or more voltage can cause premature failures

Lamp

- Halogen lamp not included
- SORAA LED modules are included
- Available in three color temperatures (2700, 3000 and 4000) or Amber (585-595nm)
- Three distributions (spot, narrow, and flood)
- Both color temperature and distribution must be specified when ordering. Sora lamp compatible (8W Max)

Compliance

- Tested to IESNA LM-79 and LM-80

Shipping Data

- Approximate Net Weight: 1.08 lbs. (0.49 kgs.)
- Effective Projected Area: 9.8 in²


Warranty

- Three year warranty standard.

*For natural bronze ROHS material consult factory.

Cambria 203 MR16 Halogen Photometric Data

Horizontal Illuminance on Surface - Cambria 203 Standard Recessed Hood - 50W MR16

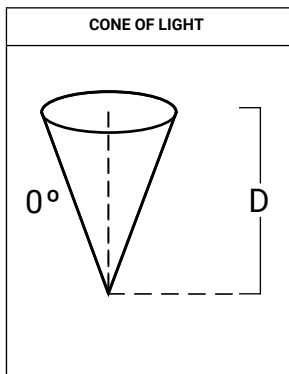

| Filename | 203-50MR16-12-BK-NSP.ies | |
|----------|--------------------------|---------------|
| Lamp | 50W MR16 NSP | |
| CBCP | 11,000 | |
| Distance | FC | Beam Diameter |
| 2' | 2550 | 1'6" |
| 4' | 638 | 1'0" |
| 6' | 283 | 1'6" |
| 8' | 159 | 2'0" |
| 10' | 102 | 3'0" |
| 15' | 45 | 4'0" |

| Filename | 203-50MR16-12-BK-NFL.ies | |
|----------|--------------------------|---------------|
| Lamp | 50W MR16 NFL | |
| CBCP | 3,200 | |
| Distance | FC | Beam Diameter |
| 2' | 725 | 1'0" |
| 4' | 181 | 2'6" |
| 6' | 81 | 4'0" |
| 8' | 45 | 5'0" |
| 10' | 29 | 6'6" |
| 15' | 13 | 10'0" |

[View IES files](#)

CCT MULTIPLIER TABLE

| LAMP WATTAGE | MULTIPLIER |
|--------------|------------|
| 20W | 0.32 |
| 35W | 0.57 |

| Filename | 203-50MR16-12-BK-FL.ies | |
|----------|-------------------------|---------------|
| Lamp | 50W MR16 FL | |
| CBCP | 2,000 | |
| Distance | FC | Beam Diameter |
| 2' | 431 | 1'6" |
| 4' | 106 | 3'0" |
| 6' | 48 | 5'0" |
| 8' | 27 | 6'6" |
| 10' | 17 | 8'0" |
| 15' | 7 | 12'0" |

| Filename | 203-50MR16-12-BK-WFL.ies | |
|----------|--------------------------|---------------|
| Lamp | 50W MR16 WFL | |
| CBCP | 1,200 | |
| Distance | FC | Beam Diameter |
| 2' | 269 | 2'0" |
| 4' | 67 | 4'6" |
| 6' | 30 | 7'6" |
| 8' | 17 | 9'0" |
| 10' | 11 | 11'6" |
| 15' | 5 | 17'0" |

NOTES AND FORMULAS

- Beam diameter is to 50% of maximum footcandles, rounded to the nearest half-foot.
- Footcandle values are initial. Apply appropriate light loss factors where necessary.
- Bare lamp data shown. Consult lamp manufacturers to obtain detailed specifications for their lamps.


Cambria 203 LED Photometric Data

LED Lumen and CBCP Table - 3000K

 View IES files

| | | Flush Hood | | | Regressed Hood (Black) | | | Regressed Hood (Silver) | | |
|----|-------|------------|--------|------|------------------------|--------|------|-------------------------|--------|------|
| | | CBCP | LUMENS | LPW | CBCP | LUMENS | LPW | CBCP | LUMENS | LPW |
| 10 | BASE | 7758 | 456 | 57 | 7188 | 387 | 48.4 | 6554 | 385 | 51.4 |
| | +DIFF | 1278 | 372 | 46.5 | 1256 | 286 | 35.7 | 1206 | 303 | 40.3 |
| | +LSL | 1700 | 402 | 50.3 | 1685 | 328 | 41 | 1557 | 328 | 43.7 |
| | +LVR | 6837 | 315 | 39.9 | 6276 | 305 | 38.2 | 6010 | 292 | 38.9 |
| | +OSL | 1700 | 402 | 50.3 | 1685 | 328 | 41 | 1557 | 328 | 43.7 |
| 25 | BASE | 3454 | 536 | 68.7 | 3285 | 480 | 60.8 | 3026 | 465 | 63.6 |
| | +DIFF | 977 | 435 | 55.7 | 936 | 344 | 43.5 | 924 | 361 | 46.3 |
| | +LSL | 1021 | 482 | 61.8 | 999 | 406 | 51.4 | 923 | 401 | 54.1 |
| | +LVR | 1864 | 492 | 63.1 | 1815 | 443 | 56.1 | 1705 | 438 | 57.6 |
| | +OSL | 1864 | 492 | 63.1 | 1815 | 443 | 56.1 | 1705 | 438 | 57.6 |
| 36 | BASE | 1469 | 525 | 68.2 | 683 | 339 | 43.5 | 1444 | 474 | 60.8 |
| | +DIFF | 696 | 432 | 56.1 | 616 | 392 | 50.3 | 645 | 345 | 44.8 |
| | +LSL | 624 | 476 | 61.9 | 1279 | 324 | 41.5 | 622 | 408 | 53.6 |
| | +LVR | 1322 | 344 | 44.7 | 1197 | 434 | 56.3 | 1242 | 323 | 42.5 |
| | +OSL | 624 | 476 | 61.9 | 1279 | 324 | 41.5 | 622 | 408 | 53.6 |

Horizontal Illuminance on Surface - Cambria 203 Standard Recessed Hood - 3000K

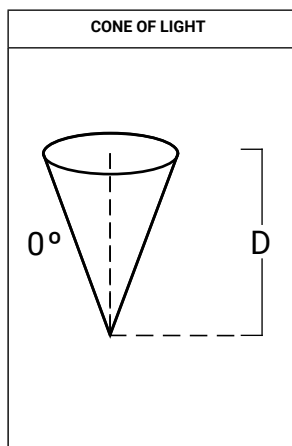

| Filename: 203-SS-8LED3010-12-BK.ies | | | |
|-------------------------------------|--------|---------------|--|
| Test No.: P349415 | | | |
| Distance | FC | Beam Diameter | |
| 2' | 1797.1 | 0.4 | |
| 4' | 449.3 | 0.8 | |
| 6' | 199.7 | 1.2 | |
| 8' | 112.3 | 1.6 | |
| 10' | 71.9 | 2 | |
| 15' | 31.9 | 3.2 | |
| 20' | 18 | 4.2 | |
| 30' | 8 | 6.4 | |
| 40' | 4.5 | 8.4 | |

| Filename: 203-SS-8LED3025-12-BK.ies | | | |
|-------------------------------------|-------|---------------|--|
| Test No.: P349495 | | | |
| Distance | FC | Beam Diameter | |
| 2' | 821.4 | 0.6 | |
| 4' | 205.3 | 1.2 | |
| 6' | 91.3 | 1.8 | |
| 8' | 51.3 | 2.4 | |
| 10' | 32.9 | 3 | |
| 15' | 14.6 | 4.6 | |
| 20' | 8.2 | 6 | |
| 30' | 3.7 | 9.2 | |
| 40' | 2.1 | 12.2 | |

| Filename: 203-SS-8LED3036-12-BK.ies | | | |
|-------------------------------------|-------|---------------|--|
| Test No.: P349480 | | | |
| Distance | FC | Beam Diameter | |
| 2' | 361.1 | 1 | |
| 4' | 90.3 | 2.2 | |
| 6' | 40.1 | 3.4 | |
| 8' | 22.6 | 4.6 | |
| 10' | 14.4 | 5.8 | |
| 15' | 6.4 | 8.6 | |
| 20' | 3.6 | 11.6 | |
| 30' | 1.6 | 17.4 | |
| 40' | 0.9 | 23.2 | |

CCT MULTIPLIER TABLE

| CCT (K) / COLOR | MULTIPLIER |
|-----------------|------------|
| 2700K | 1.04 |
| 3000K | 1.00 |
| 4000K | 0.78 |

Note: Multiplier can be used to calculate center beam candle power (CBCP), Lumens and footcandle (FC) values.

Horizontal Illuminance on Surface - Cambria 203 Flush Lens Hood - 3000K

| Filename: 203-FL-8LED3010-12-BK.ies | | | |
|-------------------------------------|--------|---------------|--|
| Test No.: P349420 | | | |
| Distance | FC | Beam Diameter | |
| 2' | 1939.5 | 0.4 | |
| 4' | 484.9 | 0.8 | |
| 6' | 215.5 | 1.2 | |
| 8' | 121.2 | 1.6 | |
| 10' | 77.6 | 2 | |
| 15' | 34.5 | 3 | |
| 20' | 19.4 | 4.2 | |
| 30' | 8.6 | 6.2 | |
| 40' | 4.8 | 8.4 | |

| Filename: 203-FL-8LED3025-12-BK.ies | | | |
|-------------------------------------|-------|---------------|--|
| Test No.: P349500 | | | |
| Distance | FC | Beam Diameter | |
| 2' | 863.4 | 0.6 | |
| 4' | 215.9 | 1.2 | |
| 6' | 95.9 | 1.8 | |
| 8' | 54 | 2.4 | |
| 10' | 34.5 | 3 | |
| 15' | 15.3 | 4.6 | |
| 20' | 8.6 | 6.2 | |
| 30' | 3.8 | 9.2 | |
| 40' | 2.2 | 12.4 | |

| Filename: 203-FL-8LED3036-12-BK.ies | | | |
|-------------------------------------|-------|---------------|--|
| Test No.: P349485 | | | |
| Distance | FC | Beam Diameter | |
| 2' | 367.2 | 1 | |
| 4' | 91.8 | 2.2 | |
| 6' | 40.8 | 3.4 | |
| 8' | 22.9 | 4.6 | |
| 10' | 14.7 | 5.8 | |
| 15' | 6.5 | 8.6 | |
| 20' | 3.7 | 11.6 | |
| 30' | 1.6 | 17.4 | |
| 40' | 0.9 | 23.2 | |

TECHNICAL INFORMATION

1. Dimming is dependant on remote transformer compatibility with LED module. Please see compatibility for dimmer switch and transformer selection.
2. When using a magnetic dimmer switch there are two recommended LED compatible 120V magnetic dimming switches: Lutron Ariadni AVLV-600P and Lutron Diva DVLV-600P
3. IMPORTANT: When sizing transformer use 12 watts per LED fixture. Nominal power draw after start up is 8 watts. Any less or more voltage can cause premature failures.