

Project		Catalog #		Type	
Prepared by		Notes		Date	



Lumière

Cambria 213

LED / Halogen
Accent / Flood

Typical Applications

- Hospitality • Commercial Landscape • Outdoor Area/Site • Residential
- Architectural

Interactive Menu

- Order Information [page 2](#)
- Cambria 213 MR16 Halogen Photometry Data [page 3](#)
- Cambria 213 LED Photometry Data [page 4](#)
- Product Warranty

Product Certification




Product Features



Top Product Features

- Integral hanging ring
- Precision-machined aluminum, brass, bronze, copper or stainless steel
- Standard with 24" leads
- Siphon Protection System (S.P.S.)
- Holds up to three optical accessories
- Three-year warranty

Dimensions

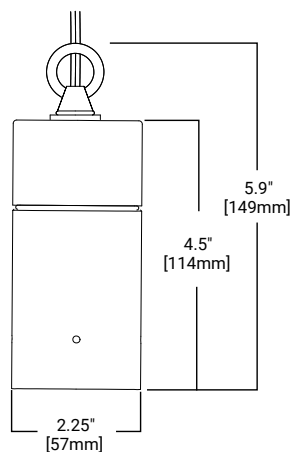

TECHNICAL DATA
8W LED, L70/60,000 hours at 25°C
Low Voltage: 50W Halogen MR16

Order Information

SAMPLE ORDER NUMBER: 213-8LED2710-12-CS

Domestic Preferences	Series	Source (for LED, select from each column and combine)			Voltage	Finish
Domestic Preferences ⁽¹⁾	Series	Source (for LED, select from each column and combine)			Voltage	Finish
[Blank]=Standard BAA=Buy American Act	213=LED or MR16 Cambria Hanging Downlight	50MR16=50W max. Halogen MR16, GU5.3 Base			12=12V	Painted BK=Black BZ=Bronze CS=City Silver VE=Verde WT=White Premium Finish NBR=Natural Brass NCP=Natural Copper NBZ=Natural Bronze* NSS=Natural Stainless Steel
		8LED=8W LED	27=2700K 30=3000K 40=4000K*	10=10° Spot 25=25° Narrow 36=36° Wide		
		5LED=5W LED	AM=Amber (585-595nm)*	25=25° Narrow		
Notes (1) Only product configurations with this designated prefix are built to be compliant with the Buy American Act of 1933 (BAA). Please refer to DOMESTIC PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.	Notes	Notes * Not Title 20 compliant.			Notes	Notes * For natural bronze ROHS material consult factory.

Optical Accessories - Order Separately

Filters (2.00" Diameter)	Optical Lenses (2.00" Diameter)	Optical Louvers (2.00" Diameter)
Filters (2.00" Diameter) ⁽²⁾	Optical Lenses (2.00" Diameter) ⁽²⁾	Optical Louvers (2.00" Diameter) ⁽²⁾
F71= Peach Dichroic F72= Amber Dichroic F73= Green Dichroic F74= Medium Blue F75= Yellow Dichroic F76= Red Dichroic F77= Dark Blue Dichroic F78= Light Blue Dichroic F79= Neutral Density Dichroic F80= Magenta Dichroic F22= Red Color F33= Blue Color F44= Green Color F55= Yellow Color F66= Mercury Vapor	LSL= Linear Spread Lens (elongates standard beam spread) DIF= Diffused lens (provides even illumination) OSL= Overall Spread Lens (increases standard beam spread)	LVR= 45° Hex Cell Louver (reduces glare)
Notes (2) Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.	Notes	Notes

Product Specifications

Material

- Housing and hood are precision-machined from corrosion-resistant billet stock 6061-T6 aluminum, C360 brass, C932 bronze*, C110 copper or 303/304 stainless steel
- Mounting ring is die-cast zinc with brass mounting collar, both finished to match housing and hood

Finish

- Fixtures constructed from 6061-T6 aluminum are double protected by an ROHS* compliant chemical film undercoating and polyester powdercoat paint finish, surpassing the rigorous demands of the outdoor environment
- A variety of standard colors are available. Brass, Bronze*, Copper or Stainless Steel Fixtures constructed from brass, bronze*, copper or stainless steel are left unpainted to reveal the natural beauty of the material. Brass, bronze* and copper will patina naturally over time

Hood

- Hood is removable for easy relamping and accepts up to three internal accessories at once (lenses, louvers, filters) to achieve multiple lighting effects

Gasket

- Housing and hood are sealed with a high temperature silicone o-ring gasket to prevent water intrusion

Lens

- Tempered glass lens, factory sealed with high temperature adhesive to prevent water intrusion and breakage due to thermal shock

Socket

- Ceramic socket with 250° C Teflon® coated lead wires and GU5.3 bi-pin base

Electrical

- Remote 12V transformer required (not included)
- Initial power draw on LED equipped fixtures is 12 watts
- When sizing transformer use 12 watts per LED fixture
- Nominal power draw after start up is 8 watts
- LEDs are more voltage sensitive than standard halogen MR16 lamps
- The LED module is designed to operate within the range 12V +/- 1.2V. Any less or more voltage can cause premature failures

Lamp

- Halogen lamp not included
- SORAA LED modules are included
- Available in three color temperatures (2700, 3000 and 4000) or Amber (585-595nm)
- Three distributions (spot, narrow, and flood)
- Both color temperature and distribution must be specified when ordering. Soraa lamp compatible (8W Max)

Compliance

- Tested to IESNA LM-79 and LM-80


Warranty

- Lumière warrants its fixtures against defects in materials & workmanship for three (3) years. Auxiliary equipment such as transformers and lamps carry the original manufacturer's warranty.

*For natural bronze ROHS material consult factory.

Cambria 213 MR16 Halogen Photometry Data

[View IES files](#)

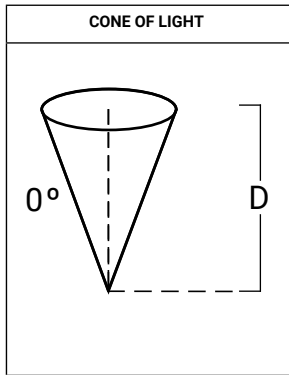

Horizontal Illuminance on Surface - Cambria 213 Standard Recessed Hood - 50W MR16

Filename	213-50MR16-12-BK-NSP.ies	
Lamp	50W MR16 NSP	
CBCP	11,000	
Distance	FC	Beam Diameter
2'	2550	1'6"
4'	638	1'0"
6'	283	1'6"
8'	159	2'0"
10'	102	3'0"
15'	45	4'0"

Filename	213-50MR16-12-BK-NFL.ies	
Lamp	50W MR16 NFL	
CBCP	3,200	
Distance	FC	Beam Diameter
2'	725	1'0"
4'	181	2'6"
6'	81	4'0"
8'	45	5'0"
10'	29	6'6"
15'	13	10'0"

CCT MULTIPLIER TABLE

LAMP WATTAGE	MULTIPLIER
20W	0.32
35W	0.57

Filename	213-50MR16-12-BK-FL.ies	
Lamp	50W MR16 FL	
CBCP	2,000	
Distance	FC	Beam Diameter
2'	431	1'6"
4'	106	3'0"
6'	48	5'0"
8'	27	6'6"
10'	17	8'0"
15'	7	12'0"

Filename	213-50MR16-12-BK-WFL.ies	
Lamp	50W MR16 WFL	
CBCP	1,200	
Distance	FC	Beam Diameter
2'	269	2'0"
4'	67	4'6"
6'	30	7'6"
8'	17	9'0"
10'	11	11'6"
15'	5	17'0"

NOTES AND FORMULAS

- Beam diameter is to 50% of maximum footcandles, rounded to the nearest half-foot.
- Footcandle values are initial. Apply appropriate light loss factors where necessary.
- Bare lamp data shown. Consult lamp manufacturers to obtain detailed specifications for their lamps.


Cambria 213 LED Photometry Data

LED Lumen and CBCP Table - 3000K
8W LED

[View IES files](#)

		Flush Hood			Regressed Hood (Black)			Regressed Hood (Silver)		
		CBCP	LUMENS	LPW	CBCP	LUMENS	LPW	CBCP	LUMENS	LPW
10	BASE	7758	456	57	7188	387	48.4	6554	385	51.4
	+DIFF	1278	372	46.5	1256	286	35.7	1206	303	40.3
	+LSL	1700	402	50.3	1685	328	41	1557	328	43.7
	+LVR	6837	315	39.9	6276	305	38.2	6010	292	38.9
	+OSL	1700	402	50.3	1685	328	41	1557	328	43.7
25	BASE	3454	536	68.7	3285	480	60.8	3026	465	63.6
	+DIFF	977	435	55.7	936	344	43.5	924	361	46.3
	+LSL	1021	482	61.8	999	406	51.4	923	401	54.1
	+LVR	1864	492	63.1	1815	443	56.1	1705	438	57.6
	+OSL	1864	492	63.1	1815	443	56.1	1705	438	57.6
36	BASE	1469	525	68.2	683	339	43.5	1444	474	60.8
	+DIFF	696	432	56.1	616	392	50.3	645	345	44.8
	+LSL	624	476	61.9	1279	324	41.5	622	408	53.6
	+LVR	1322	344	44.7	1197	434	56.3	1242	323	42.5
	+OSL	624	476	61.9	1279	324	41.5	622	408	53.6

Horizontal Illuminance on Surface - Cambria 213 Standard Recessed Hood - 3000K

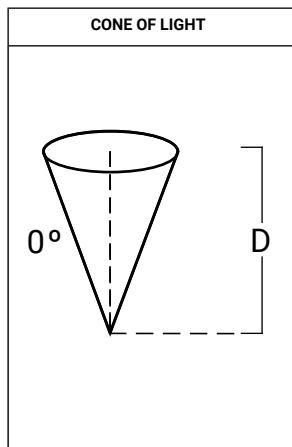

Filename: 213-SS-8LED3010-12-BK.ies			
Test No.: P349410			
Distance	FC	Beam Diameter	
2'	1797.1	0.4	
4'	449.3	0.8	
6'	199.7	1.2	
8'	112.3	1.6	
10'	71.9	2	
15'	31.9	3.2	
20'	18	4.2	
30'	8	6.4	
40'	4.5	8.4	

Filename: 213-SS-8LED3025-12-BK.ies			
Test No.: P349670			
Distance	FC	Beam Diameter	
2'	821.4	0.6	
4'	205.3	1.2	
6'	91.3	1.8	
8'	51.3	2.4	
10'	32.9	3	
15'	14.6	4.6	
20'	8.2	6	
30'	3.7	9.2	
40'	2.1	12.2	

Filename: 213-SS-8LED3036-12-BK.ies			
Test No.: P349580			
Distance	FC	Beam Diameter	
2'	361.1	1	
4'	90.3	2.2	
6'	40.1	3.4	
8'	22.6	4.6	
10'	14.4	5.8	
15'	6.4	8.6	
20'	3.6	11.6	
30'	1.6	17.4	
40'	0.9	23.2	

CCT MULTIPLIER TABLE

CCT (K) / COLOR	MULTIPLIER
2700K	1.04
3000K	1.00
4000K	0.78

Note: Multiplier can be used to calculate center beam candle power (CBCP), Lumens and footcandle (FC) values.

TECHNICAL INFORMATION

1. Dimming is dependant on remote transformer compatibility with LED module. Please see compatibility matrix for dimmer switch and transformer selection.
2. When using a magnetic dimmer switch there are two recommended LED compatible 120V magnetic dimming switches: Lutron Ariadni AVLV-600P and Lutron Diva DVLV-600P
3. IMPORTANT: When sizing transformer use 12 watts per LED fixture. Nominal power draw after start up is 8 watts. Any less or more voltage can cause premature failures.