



UPC: 192552027014



Color: Clear



Weight: 0.0 lbs

| | |
|--------------|-------|
| Project: | Type: |
| Prepared By: | Date: |

Technical Specifications

Performance

Description:

Field adjustable lumen output and CCT provide installation flexibility when replacing traditional HID. Integrated AUX port to add lamp-level sensor control.

Wattage Equivalency:

200W/250W/400W Metal Halide

Input Wattage:

60W/80W/115W

Lumens (Nominal):

60W:
3000K @ 8,100lm; 4000K @ 8,700lm; 5000K @

8,400lm

80W:

3000K @ 10,800lm; 4000K @ 11,600lm; 5000K @

11,200lm

115W:

3000K @ 15,525lm; 4000K @ 16,675lm; 5000K @

16,100lm

Efficacy:

60W/80W/115W

3000K @ 135lm/W; 4000K @ 145lm/W; 5000K @

140lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Electrical

THD:

≤20%

Power Factor:

≥0.9

Dimmable:

Yes via the Lightcloud Blue mobile app and devices. This lamp will not operate properly when connected to a standard (incandescent) dimmer or dimming control.

Input Voltage:

100-277V

Operating Frequency:

50/60Hz

Input Current @ 120V (mA):

988mA

Input Current @ 208V (mA):

587mA

Input Current @ 240V (mA):

521mA

Input Current @ 277V (mA):

415mA

Operating Temperature:

-22°F to 140°F (-30°C to 60°C)

Flicker:

<30%

Surge Protection:

4kV

LED Characteristics

Color Temperature:

Field adjustable via dip switch 3000K/4000K/5000K

Color Accuracy (CRI):

≥80 CRI

R9 Value:

High color performance with R9 no less than 0

Color Consistency:

<6-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability:

LED color temperature is warranted to shift no more than 200K in color temperature over a 5-year period

Technical Specifications (continued)

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Installation

Installation Method:

UL Type B, Ballast Bypass

Installation Orientation:

Vertical

Construction

Base Type:

EX39

Finish:

Clear

Bulb Shape:

High bay (sensor)

Endcap Material:

Metal

Enclosure Material:

Polycarbonate

Compliance

Listings:

UL Listed, UL Classified

Environment:

Suitable for use in dry and damp environments

Fixture Rating:

Suitable for use in enclosed fixtures

IP Rating:

IP64

Model Number for Certification:

H20043(HIDFA-115S-V-EX39-8CCT-BYP/5SP)

California Energy Commission (CEC) Status:

Lawful for Sales in California

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15B of the FCC Rules

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PLNAFK8CSGYM

Other

Compatible Products:

Add the Lightcloud Blue 5-Pin Plug-in Controller with optional sensor to connect to the Lightcloud Blue Bluetooth Mesh Wireless Network Lighting Control System. Learn more about Lightcloud Blue.

Accessories:

CONTROL/W/AUX/5SP/LCB

Lightcloud Blue 5-Pin Plug-in Controller

CONTROL/W/AUX/5SP/LCBS

Lightcloud Blue 5-Pin Plug-in Controller with PIR Sensor

CONTROL/W/AUX/5SP/LCBS/MVS

Lightcloud Blue 5-Pin Plug-in Controller with MVS Sensor

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Note:

All values are typical (tolerance +/- 10%)


Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Case and Pallet Dimensions

| | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|-----|-------------|------------|-------------|
| CASE | 4 | 20.27 | 20.27 | 11 |
| PALLET | 2 | 48 | 40.95 | 45.77 |

Dimension

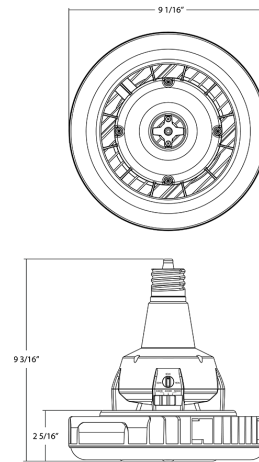

Features

- Replaces traditional metal halide or high pressure sodium HID lamp
- Adjustable wattage and CCT allows for in-field customization
- Integral driver enables lamp to be wired directly to line voltage without need for an external driver or ballast
- Rated for use in enclosed fixtures in dry or damp locations

Ordering Matrix

| Family | Wattage | Base Type | CRI/Color Temp | Installation Type | Sensor |
|--------|--|---|-------------------------------------|----------------------|---|
| HIDFA | 115S | V | EX39 | 8CCT | BYP |
| | 27S = 27/18/12W 36S = 36/27/18W 45S = 45/36/27W 54S = 54/45/36W 63S = 63/54/45W 80S = 89/63/54W 100S = 100/80/63W 120S = 120/100/80W 205S = 205/165/135W Vertical | EX39 = EX39 Extended Mogul E26 = E26 Edison | 8CCT = 80 CRI, 3000K/4000K/5000K | BYP = Ballast Bypass | Blank = No Sensor /5SP = 5-Pin Sensor Port |