


Field-Adjustable, Retrofit Light Bar

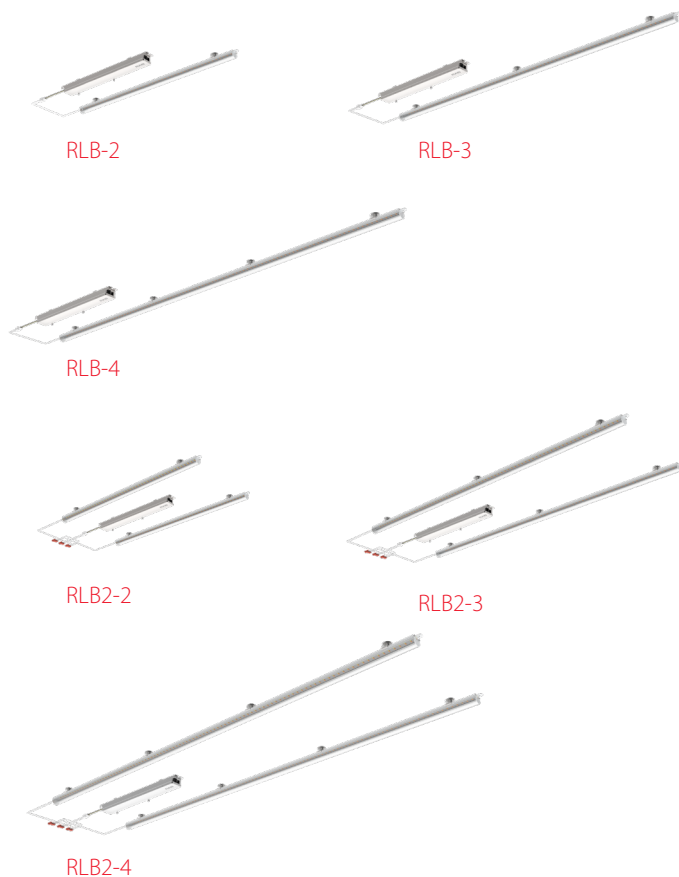

PROJECT:

DATE:

TYPE:

PREPARED BY:



KEY FEATURES

- Available in 3 lengths, single or dual-bar, w/selectable wattage:
RLB-2: 2' - 20/15/10W
RLB-3: 3' - 25/20/15W
RLB-4: 4' - 30/25/20W
RLB2-2: 2X2' - 40/35/30/25/20W
RLB2-3: 2X3' - 45/40/35/30/25W
RLB2-4: 2X4' - 50/45/40/35/30W
- Selectable CCT: 3000/3500/4000/5000/6500K
- Clear or frosted domed lens
- Driver: 120-277V, 0-10V dimming
- Battery backup, motion sensor & Lightcloud accessories (*sold separately*)
- Multi-sensor remote (*sold separately*)
- 5-year, limited warranty

Field-adjustable, retrofit light bar



0-10V



100,000
HOURS



DAMP
RATED



BATTERY
BACKUP



POWERED BY
LIGHTCLOUD



FIELD
ADJUSTABLE

PERFORMANCE

RLB-2C	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	20W					15W					10W				
INPUT WATTS	19.7W	19.3W	19.3W	19.3W	19.4W	15.0W	15.0W	15.0W	15.0W	15.0W	10.6W	10.6W	10.6W	10.6W	10.6W
LUMENS	3,009	2,916	2,932	2,979	3,018	2,272	2,279	2,301	2,316	2,330	1,585	1,590	1,602	1,609	1,621
LM/W	152.8	151.1	151.9	154.1	155.6	151.5	151.7	153.0	153.8	154.8	149.3	150.0	150.9	151.8	152.4
CRI	83	85	86	87	85	83	85	87	87	85	83	85	87	87	85
INPUT VOLTAGE	120-277V					120-277V					120-277V				

RLB-2F	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	20W					15W					10W				
INPUT WATTS	19.8W	19.3W	19.3W	19.3W	19.4W	15.0W	15.0W	15.0W	15.1W	15.1W	10.6W	10.6W	10.6W	10.6W	10.6W
LUMENS	2,659	2,456	2,470	2,510	2,542	1,912	1,923	1,938	1,953	1,965	1,337	1,340	1,349	1,356	1,366
LM/W	134.5	127.3	128.0	129.9	131.1	127.4	127.9	128.9	129.7	130.5	125.9	126.4	127.1	127.5	128.3
CRI	84	85	86	86	85	84	85	87	87	85	84	86	87	87	85
INPUT VOLTAGE	120-277V					120-277V					120-277V				

Field-Adjustable, Retrofit Light Bar



PERFORMANCE

RLB-3C	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	25W					20W					15W				
INPUT WATTS	24.0W	23.6W	23.7W	23.6W	23.7W	19.3W	19.3W	19.3W	19.3W	19.3W	15.1W	15.1W	15.1W	15.1W	15.1W
LUMENS	3,739	3,740	3,762	3,784	3,806	3,061	3,083	3,105	3,127	3,149	2,396	2,403	2,425	2,447	2,469
LM/W	155.8	158.4	159.0	160.1	160.3	159.0	159.8	161.0	161.8	163.0	158.8	159.5	160.7	161.9	163.1
CRI	83	85	86	86	85	83	85	86	86	85	83	85	86	86	85
INPUT VOLTAGE	120-277V					120-277V					120-277V				

RLB-3F	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	25W					20W					15W				
INPUT WATTS	23.9W	23.6W	23.7W	23.6W	23.7W	19.3W	19.3W	19.3W	19.3W	19.3W	15.1W	15.1W	15.1W	15.1W	15.1W
LUMENS	3,254	3,149	3,170	3,188	3,209	2,581	2,600	2,616	2,636	2,655	2,021	2,026	2,044	2,062	2,080
LM/W	136.0	133.4	134.0	134.9	135.2	134.1	134.8	135.6	136.4	137.4	134.0	134.5	135.4	136.4	137.4
CRI	83	85	87	86	85	84	86	87	87	85	84	86	87	87	85
INPUT VOLTAGE	120-277V					120-277V					120-277V				

RLB4C	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	30W					25W					20W				
INPUT WATTS	29.6W	29.4W	29.4W	29.5W	29.5W	25.0W	25.0W	25.0W	25.1W	25.0W	19.4W	19.4W	19.4W	19.4W	19.4W
LUMENS	4,456	4,471	4,537	4,611	4,690	3,799	3,857	3,916	3,981	4,032	3,017	3,032	3,068	3,127	3,156
LM/W	150.8	152.0	154.1	156.5	159.1	152.3	154.2	156.5	158.9	161.0	155.8	156.4	158.2	161.2	162.8
CRI	84	86	87	86	84	84	86	87	86	84	84	86	87	86	84
INPUT VOLTAGE	120-277V					120-277V					120-277V				

RLB-4F	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	30W					25W					20W				
INPUT WATTS	29.4W	29.4W	29.4W	29.5W	29.5W	25.0W	25.0W	25.0W	25.1W	25.0W	19.4W	19.4W	19.4W	19.4W	19.4W
LUMENS	3,878	3,763	3,819	3,880	3,953	3,202	3,252	3,296	3,353	3,399	2,540	2,554	2,587	2,632	2,657
LM/W	132.0	128.0	129.7	131.7	134.1	128.3	130.0	131.8	133.8	135.8	131.2	131.8	133.4	135.7	137.1
CRI	84	86	87	86	84	84	86	87	86	84	84	86	87	86	84
INPUT VOLTAGE	120-277V					120-277V					120-277V				

RLB2-2C	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	40W					35W					30W				
INPUT WATTS	39.6W	38.0W	38.0W	38.0W	38.2W	32.2W	32.3W	32.3W	32.4W	32.4W	27.8W	27.9W	27.9W	27.9W	28.0W
LUMENS	6,016	5,866	5,874	5,895	5,961	5,019	5,055	5,085	5,114	5,143	4,398	4,427	4,449	4,478	4,500
LM/W	152.0	154.3	154.6	155.1	155.9	156.0	156.7	157.4	158.0	158.8	158.2	158.9	159.5	160.3	161.0
CRI	83	85	86	86	85	83	85	86	86	85	83	85	87	86	85
INPUT VOLTAGE	120-277V					120-277V					120-277V				

RLB2-2C	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	25W					20W				
INPUT WATTS	23.6W	23.6W	23.6W	23.6W	23.6W	19.3W	19.3W	19.3W	19.3W	19.3W
LUMENS	3,755	3,784	3,806	3,828	3,850	3,098	3,112	3,125	3,141	3,149
LM/W	158.9	160.1	161.1	162.0	162.9	160.6	161.2	161.8	162.7	163.1
CRI	83	85	87	87	85	84	85	87	87	85
INPUT VOLTAGE	120-277V					120-277V				

Field-Adjustable, Retrofit Light Bar



PERFORMANCE

RLB2-2F	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	40W					35W					30W				
INPUT WATTS	37.7W	38.0W	38.0W	38.0W	38.2W	32.2W	32.3W	32.3W	32.4W	32.4W	27.8W	27.9W	27.9W	27.9W	28.0W
LUMENS	5,043	4,939	4,948	4,968	5,024	4,230	4,261	4,286	4,311	4,331	3,702	3,727	3,748	3,771	3,790
LM/W	133.8	130.0	130.2	130.7	131.4	131.4	132.1	132.6	133.2	133.8	133.2	133.7	134.4	135.0	135.6
CRI	83	85	86	86	85	83	85	86	86	85	83	85	86	86	85
INPUT VOLTAGE	120-277V					120-277V					120-277V				

RLB2-2F	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	25W					20W				
INPUT WATTS	23.6W	23.6W	23.6W	23.7W	23.7W	19.3W	19.3W	19.3W	19.3W	19.3W
LUMENS	3,164	3,185	3,204	3,225	3,243	2,609	2,616	2,633	2,647	2,653
LM/W	134.3	135.0	135.6	136.3	137.0	135.3	135.7	136.3	137.0	137.4
CRI	83	85	87	86	85	83	85	87	86	85
INPUT VOLTAGE	120-277V					120-277V				

RLB2-3C	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	45W					40W					35W				
INPUT WATTS	44.5W	42.1W	42.0W	41.8W	41.9W	37.5W	37.6W	37.6W	37.6W	37.6W	33.0W	33.0W	33.1W	33.1W	33.1W
LUMENS	7,011	6,801	6,794	6,794	6,838	6,071	6,107	6,144	6,180	6,195	5,377	5,421	5,464	5,508	5,537
LM/W	157.6	161.4	161.8	162.4	163.4	161.8	162.6	163.5	164.4	164.9	163.1	164.1	165.2	166.4	167.2
CRI	83	85	86	86	85	83	85	86	86	85	83	85	86	86	85
INPUT VOLTAGE	120-277V					120-277V					120-277V				

RLB2-3C	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	30W					25W				
INPUT WATTS	28.9W	29.0W	29.0W	29.0W	28.7W	24.6W	24.6W	24.6W	24.7W	24.7W
LUMENS	4,734	4,756	4,785	4,822	4,836	4,033	4,062	4,091	4,128	4,157
LM/W	163.6	164.2	165.1	166.3	168.6	164.1	165.0	166.0	167.4	168.6
CRI	83	85	87	87	85	84	85	87	87	85
INPUT VOLTAGE	120-277V					120-277V				

RLB2-3F	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	45W					40W					35W				
INPUT WATTS	33.0W	33.0W	33.1W	33.1W	33.1W	37.5W	37.6W	37.6W	37.6W	37.6W	33.0W	33.0W	33.1W	33.1W	33.1W
LUMENS	4,532	4,569	4,602	4,637	4,667	5,116	5,144	5,175	5,208	5,221	5,377	5,421	5,464	5,508	5,537
LM/W	137.5	138.3	139.2	140.1	141.0	136.4	137.0	137.7	138.5	139.0	163.1	164.1	165.2	166.4	167.2
CRI	84	86	87	87	85	84	85	87	87	85	83	85	86	86	85
INPUT VOLTAGE	120-277V					120-277V					120-277V				

RLB2-3F	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	30W					25W				
INPUT WATTS	28.9W	29.0W	29.0W	29.0W	28.7W	24.6W	24.6W	24.6W	24.7W	24.7W
LUMENS	3,986	4,008	4,032	4,059	4,072	3,397	3,423	3,447	3,475	3,499
LM/W	137.7	138.3	139.1	140.0	142.0	138.3	139.0	139.9	140.9	141.9
CRI	84	86	87	86	85	84	86	87	87	85
INPUT VOLTAGE	120-277V					120-277V				

Field-Adjustable, Retrofit Light Bar



PERFORMANCE

RLB2-4C	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	50W					45W					40W				
INPUT WATTS	49.1W	48.2W	48.0W	48.1W	47.8W	44.3W	44.4W	44.3W	44.4W	44.3W	39.3W	39.3W	39.4W	39.3W	39.3W
LUMENS	7,447	7,194	7,357	7,201	7,539	6,484	6,510	6,539	6,568	6,608	5,810	5,845	5,873	5,894	5,914
LM/W	151.6	149.4	153.3	149.7	157.6	146.4	146.7	147.5	148.1	149.1	148.0	148.6	149.1	149.9	150.4
CRI	84	86	87	86	84	84	86	87	86	84	84	86	87	86	84
INPUT VOLTAGE	120-277V					120-277V					120-277V				

RLB2-4C	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	35W					30W				
INPUT WATTS	34.5W	34.6W	34.6W	34.7W	34.7W	29.8W	29.9W	29.9W	29.9W	30.0W
LUMENS	5,197	5,348	5,216	5,231	5,240	4,481	4,499	4,519	4,537	4,555
LM/W	150.7	154.7	150.7	151.0	151.2	150.4	150.6	151.1	151.6	152.1
CRI	84	86	87	86	84	84	86	87	86	84
INPUT VOLTAGE	120-277V					120-277V				

RLB2-4F	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	50W					45W					40W				
INPUT WATTS	47.3W	47.5W	47.6W	47.6W	47.9W	42.0W	42.1W	42.2W	42.2W	42.2W	37.7W	37.8W	37.8W	37.8W	37.7W
LUMENS	6,288	6,228	6,317	6,429	6,640	5,518	5,598	5,684	5,786	5,870	5,012	5,079	5,153	5,242	5,304
LM/W	133.0	131.0	132.8	135.1	138.7	131.3	132.9	134.8	137.1	139.2	132.9	134.5	136.4	138.7	140.5
CRI	84	86	87	86	84	84	86	87	86	84	84	86	87	86	84
INPUT VOLTAGE	120-277V					120-277V					120-277V				

RLB2-4F	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
WATTS	35W					30W				
INPUT WATTS	33.3W	33.4W	33.4W	33.4W	33.4W	29.0W	29.1W	29.1W	29.1W	29.1W
LUMENS	4,460	4,529	4,598	4,684	4,754	3,927	3,980	4,039	4,110	4,162
LM/W	133.9	135.7	137.6	140.1	142.4	135.2	136.9	138.9	141.3	143.2
CRI	84	86	87	86	84	84	86	87	86	84
INPUT VOLTAGE	120-277V					120-277V				

Field-Adjustable, Retrofit Light Bar



TECHNICAL SPECIFICATIONS

CONSTRUCTION

Cold Weather Starting

The minimum starting temperature is -20°C (-4°F)

Maximum Ambient Temperature

Suitable for use in up to 40°C (104°F)

Cold Weather Starting w/Battery Backup

The minimum starting temperature is -0°C (-32°F)

Maximum Ambient Temperature w/Battery Backup

Suitable for use in up to 50°C (122°F)

Mounting

Recessed into existing T-grid brackets

Housing

Aluminum

Lens

Polycarbonate

IC Rated

Suitable for direct contact with insulation

Finish

Formulated for high durability and long lasting color

Green Technology

Mercury and UV free. RoHS-compliant components.

COMPLIANCE

UL Listed

Suitable for damp locations

DLC Listed

The product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product ID:

MODEL#	DLC ID	MODEL#	DLC ID
RLB-2C	S-HYWL94	RLB2-2C	S-XQ5HYG
RLB-2F	S-2DLJJR	RLB2-2F	S-3VKH7T
RLB-3C	S-K14G7Y	RLB2-3C	S-N4RHLD
RLB-3F	S-KCLBS5	RLB2-3F	S-6LFLXK
RLB-4C	S-SZKHT1	RLB2-4C	S-9WKYW2
RLB-4F	S-Q4TPK7	RLB2-4F	S-PYMMZ7

LED CHARACTERISTICS

LEDs

Long-life, high-efficacy, discrete, surface-mount LEDs

FACTORY SETTINGS

Selectable Wattage

RLB-2: 2' - 20/15/10W (Default 20W)

RLB-3: 3' - 25/20/15W (Default 25W)

RLB-4: 4' - 30/25/20W (Default 30W)

RLB2-2: 2X2' - 40/35/30/25/20W (Default 40W)

RLB2-3: 2X3' - 45/40/35/30/25W (Default 45W)

RLB2-4: 2X4' - 50/45/40/35/30W (Default 50W)

Selectable CCT

3000/3500/4000/5000/6500K (Default 4000K)

ELECTRICAL

Drivers

Constant Current, Class 2, 120-277V, 50/60 Hz

MODEL#	WATTAGE	AMPS RATINGS			
		120V	208V	240V	277V
RLB-2C	10W	0.092A	0.053A	0.046A	0.040A
	15W	0.138A	0.079A	0.069A	0.060A
	20W	0.183A	0.106A	0.092A	0.079A
RLB-3C	15W	0.138A	0.079A	0.069A	0.060A
	20W	0.183A	0.106A	0.092A	0.079A
	25W	0.229A	0.132A	0.115A	0.099A
RLB-4C	20W	0.183A	0.106A	0.092A	0.079A
	25W	0.229A	0.132A	0.115A	0.099A
	30W	0.275A	0.159A	0.138A	0.119A
RLB2-2C	20W	0.183A	0.106A	0.084A	0.079A
	25W	0.229A	0.132A	0.115A	0.099A
	30W	0.275A	0.159A	0.138A	0.119A
	35W	0.321A	0.185A	0.160A	0.139A
	40W	0.367A	0.212A	0.183A	0.159A
RLB2-3C	25W	0.229A	0.132A	0.115A	0.099A
	30W	0.275A	0.159A	0.138A	0.119A
	35W	0.321A	0.185A	0.160A	0.139A
	40W	0.367A	0.212A	0.183A	0.159A
	45W	0.413A	0.238A	0.206A	0.179A
RLB2-4C	30W	0.275A	0.159A	0.138A	0.119A
	35W	0.321A	0.185A	0.160A	0.139A
	40W	0.367A	0.212A	0.183A	0.159A
	45W	0.413A	0.238A	0.206A	0.162A
	50W	0.458A	0.264A	0.229A	0.199A

Emergency Light Loss Factor:

MODEL#	WATTAGE	LLF	MODEL#	WATTAGE	LLF
RLB-2	10W	0.92	RLB2-2	20W	0.43
	15W	0.60		25W	0.35
	20W	0.45		30W	0.30
				35W	0.26
				40W	0.23
RLB-3	15W	0.60	RLB2-3	25W	0.35
	20W	0.46		30W	0.30
	25W	0.36		35W	0.26
				40W	0.23
				45W	0.20
RLB-4	20W	0.46	RLB2-4	30W	0.30
	25W	0.37		35W	0.26
	30W	0.31		40W	0.23
				45W	0.20
				50W	0.18

Field-Adjustable, Retrofit Light Bar



TECHNICAL SPECIFICATIONS

ELECTRICAL (CONTINUED)

Dimming Driver

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%

Surge Protection

L-N:1KV ,L/N-PG:2KV

Note: All values are typical (tolerance +/- 10%)

MICROWAVE SENSOR

Sensor Type: Microwave (RLB-MVS)

Sensor Mounting: Externally mounted to fixture

Operating Frequency: 50/60Hz

Max Mounting Height: 13 ft

Sensor Parameter:

Detection Area: 25%/50%/75%/100%

Hold Time: 5s/30s/1min/3min/5min/10min/20min/30min

Daylight Threshold: 2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/200Lux/250Lux/300Lux/350Lux/400Lux/Disable

Standby Dimming Level: 10%/20%/30%/50%

Standby Period: 0s/10s/30s/1min/5min/10min/30min/60min/+∞

Control: MSR1 (purchased separately)

Input:

Input Range: 10.5-12V DC

Current: ≥50mA

Output:

Signal: DIM 0-10V

Dimming Play: Manually dim 10%~100% in ON/OFF mode, 60%~100% in sensor mode

Stand-by Power <30mA Power Consumption

Microwave Information:

Frequency: 5.85-5.87 GHz

Microwave Power: <0.3mW

Installation Height: Max.4m/13.12ft Ceiling Mounted

Detection Distance: Radius 3-7m/9.84-22.96ft Ceiling Mounted

Motion Detection: 0.5~1.5m

Detection Angle: 30-150 ° Without Glass Cover

Warranty: 5 years

Environment:

Working Temp: -20°C~+60°C

EMERGENCY BATTERY BACKUP

Battery Backup: RLB-EM

Input Voltage: 100-347VAC

Operating Frequency: 50/60Hz

Input Current: 100mA Max

Charging Time: ≥24 Hrs

Emergency Time: 90 Minutes

Input Power: 7W Max

Output Voltage: 30-60VDC

Max Mounting Height: 16.5 ft

WIRELESS NETWORK LIGHTING CONTROL

Lightcloud Blue

Lightcloud Blue (LCB) is a Bluetooth Mesh wireless lighting control system that allows you to control RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and large commercial applications using the Lightcloud Blue mobile app. Each device in a system can communicate with any other device, eliminating the need for a Gateway or Hub and maximizing the control system's reach.

DLC system - N1XMLOEATBA (Interior); NHCZ2BIA17L (Exterior)

Learn more at www.lightcloud.com

OTHER

Warranty

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Lifespan

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

ACCESSORIES

IMAGE	SKU#	UPC	DESCRIPTION
	RLB-EM	192552046046	RLB EM BATTERY 8W EM BATTERY 8W 100-347VAC 30-60VDC
	RLB-MVS	192552046053	RLB MVS SENSOR MAX 6M HIGH
	RLB-LCBS/MVS	192552046060	RLB LCB MVS SENSOR 6M HIGH MVS SENSOR WHITE LCB CONT
	MSR1	192552026055	MULTI SENSOR REMOTE CONTROL IP20


Field-Adjustable, Retrofit Light Bar



DIMENSIONS


RLB

MODEL#	DIMENSION				WEIGHT	
	A	B	C	D	w/CLEAR LENS	w/FROSTED LENS
RLB-2	1 13/64"	20 7/8"	13/16"	15/16"	0.9 lb	1.0 lb
RLB-3	1 13/64"	32 11/16"	13/16"	15/16"	1.1 lbs	0.9 lb
RLB-4	1 13/64"	41 3/4"	13/16"	15/16"	1.0 lb	1.1 lbs

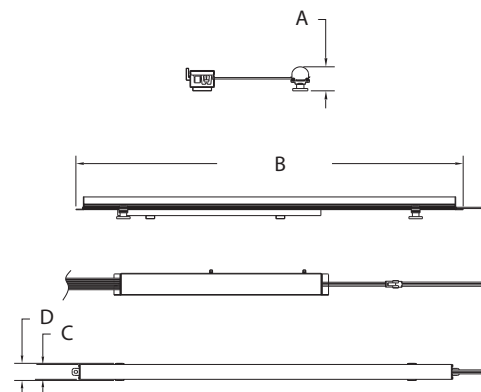

RLB2

MODEL#	DIMENSION				WEIGHT	
	A	B	C	D	w/CLEAR LENS	w/FROSTED LENS
RLB2-2	1 13/64"	20 7/8"	13/16"	15/16"	1.1	1.4
RLB2-3	1 13/64"	32 11/16"	13/16"	15/16"	1.6	1.1
RLB2-4	1 13/64"	41 3/4"	13/16"	15/16"	1.4	1.6

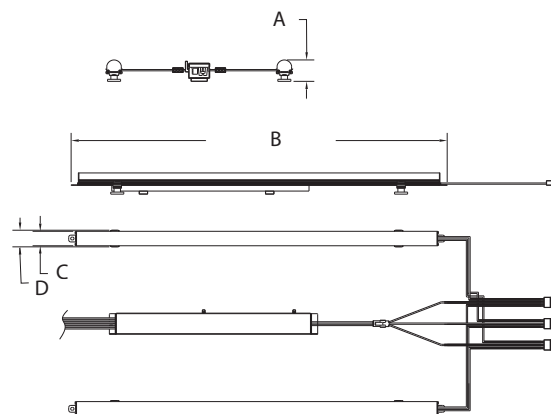

ORDERING MATRIX

FAMILY	SIZE / WATTAGES	COLOR TEMPERATURE	LENS	DRIVER
RLB	2' (20/15/10W) 3' (25/20/15W)	Blank 3000/3500/4000/5000/6500K Selectable	C F Clear Domed Lens Frosted Domed Lens	Blank 120-277V, 0-10V Dimming

FAMILY	SIZE / WATTAGES	COLOR TEMPERATURE	LENS	DRIVER
RLB2	2' (40/35/30/25/20W) 3' (45/40/35/30/25W) 4' (50/45/40/35/30W)	Blank 3000/3500/4000/5000/6500K Selectable	C F Clear Domed Lens Frosted Domed Lens	Blank 120-277V, 0-10V Dimming