


CL-EHL SERIES Industrial Lighting

CL-EHL-18W-30K-E26
CL-EHL-18W-50K-E26



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

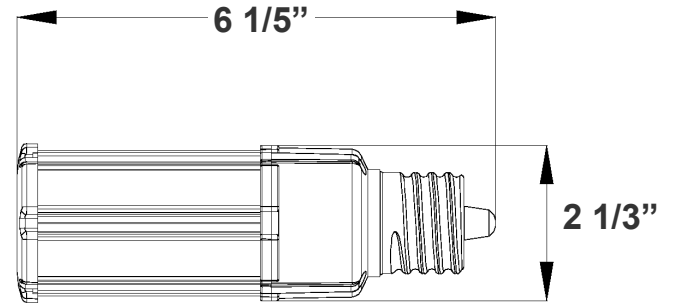

6 1/5"(H) x 2 1/3"(W)

LED Corn Lamp suitable for supermarkets, warehouses, garages, home, offices, hotels, hospitals, schools, high bay retrofitting

Features

- E26 medium Base
- 5-Year Warranty
- Housing: PC + Aluminum
- 50,000 Hours Rated Life

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 18W
- Power Factor: >0.9
- AC Direct / Bypass Existing Ballast
- THD: ≤20%
- Efficacy: 125/145LPW

Mechanical:

- PC and Aluminum Housing and Sealant Pouring for Whole Driver
- Meet 4KV surge immunity level
- Operating temperature: -40°F to 176°F
- Minimum Enclosed Space Dimension: 11.8"(H) x 7.1"(D) and 593 Cubic in.
- Suitable for Damp Location

Lighting:

- LED SMD type: Edison 2835
- Total Lumens: 2250LM/2610LM
- Color temperature: 3000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam angle: 360°
- Replacement Range: 50-60MH

Applications:



- LED Corn Lamp suitable for supermarkets, warehouses, garages, home, offices, hotels, hospitals, schools, highbay retrofitting

Other Models:


- | | | |
|--------------------------------------|----------------------------------------|----------------------------------------|
| • 12W 1500LM CL-EHL-12W-30K-E26 | • 27W 3375LM CL-EHL-27W-30K-E26 | • 36W 4500LM CL-EHL-36W-30K-E26 |
| • 12W 1860LM CL-EHL-12W-50K-E26 | • 27W 4185LM CL-EHL-27W-50K-E26 | • 36W 5580LM CL-EHL-36W-50K-E26 |
| • 36W 4500LM CL-EHL-36W-30K-E39 | • 45W 5625LM CL-EHL-45W-30K-E39 | • 54W 6750LM CL-EHL-54W-30K-E39 |
| • 36W 5580LM CL-EHL-36W-50K-E39 | • 45W 6975LM CL-EHL-45W-50K-E39 | • 54W 8370LM CL-EHL-54W-50K-E39 |
| • 75W 9375LM CL-EHL-75W-30K-E39 | • 100W 12500LM CL-EHL-100W-30K-E39 | • 120W 15600LM CL-EHL-120W-30K-E39 |
| • 75W 11625LM CL-EHL-75W-50K-E39 | • 100W 15500LM CL-EHL-100W-50K-E39 | • 120W 17400LM CL-EHL-120W-50K-E39 |



Photometrics: CL-EHL-18W-E26

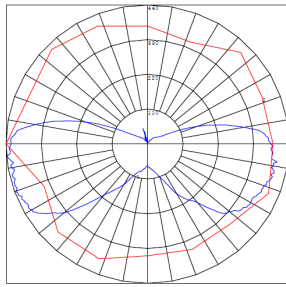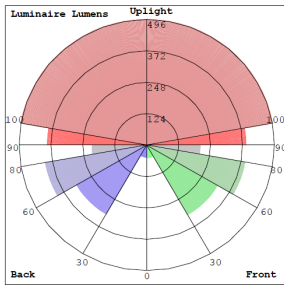

BUG Rating: B1-U3-G2

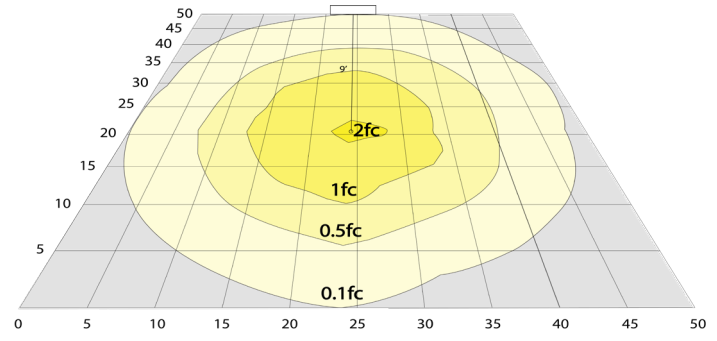

18W, 5000K Area 50'x 50' Mounting Height: 9'

Other Views:



Side View



Front View

Performance Table: CL-EHL-18W-E26

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CL-EHL-18W-30K-E26	18W	120~277V	2250	3000K	B1-U3-G2	125
CL-EHL-18W-50K-E26	18W	120~277V	2610	5000K	B1-U3-G2	145

Sample Ordering

Model Style Wattage Color Temp. Base

CL - EHL - 18W - - E26

30K = 3000K
50K = 5000K

Accessory:

Blank = No Option For Accessories
E26-ENLARGER = ENLARGES E26 BULB TO BE USED IN E39 SOCKET

ACCESSORY:



E26-ENLARGER

Example:

- CL-EHL-18W-30K-E26 (FOR CL EHL 18W FIXTURE 120-277V)
- CL-EHL-18W-30K-E26 (FOR CL EHL 18W FIXTURE 120-277V)
E26-ENLARGER (ENLARGES E26 BULB TO BE USED IN E39 SOCKET)

