CXES SERIES OUTDOOR LIGHTING



CXES-40-80W-MCTP

SQUARE NEW CONCEPT GARAGE AND CEILING LIGHTS

Mari Power/Wattage (Selectable)



15 3/4" Avali Finishes:

Note: Type: 15 3/4"

Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting.

15 3/4"(L) X 15 3/4"(W) X 3 3/4"(H)

Features

- Stamped Galvanized Steel With Prismatic Polycarbonate Lens Redesigned For LED
- Designed for 9 to 16 Foot Mounting Heights

- Factory-Installed Options: Battery Backup, Motion Sensor
- 7-year Warranty

Customer Name:

Project Name:

Technical Specifications

Electrical:

Wattage: 40W/60W/80W Input Current: 0.6A MAX

Input Voltage: 120-277VAC 50/60Hz

Power Factor: >0.90 LPW: 130LPW

Mechanical:

- Die-Cast Aluminum With Bronze
- Twist-Lock Zhaga Socket Pre-Installed. See Motion Sensor Accessories
- Four 1/2" Threaded Hubs Located On Four Sides Of The Housing
- Prismatic Polycarbonate Lens
- Lifespan: 70000 Hrs
- Operating Temperature: -40°F ~ 104°F
- Suitable For Damp Locations
- 7-year Warranty

Lighting:

- MCTP:Multi-CCT and Power Switch Is In The Fixture
- Dimming: 0~10V Dimmable
- LED Type/ Brand: LUMILEDS 2835LED
- Total Lumens: 10400LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: 150°
- Lifespan: 70000 Hrs

Applications:

- Indoor Parking
- Commercial Buildings
- School
- Warehouses
- Complexes
- Apartment
- Garage

Other Models:

30W | 3900LM | CXES-10-30W-MCTP

60W | 7800LM | CXES-30-60W-MCTP













Photometrics: CXES-40-80W-MCTP

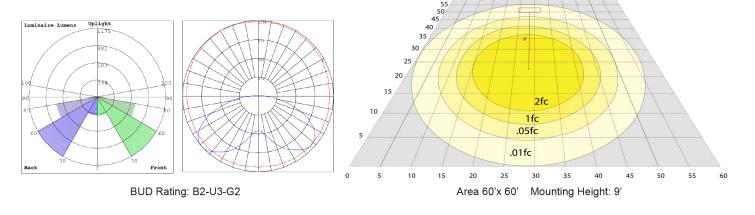

Other Views:

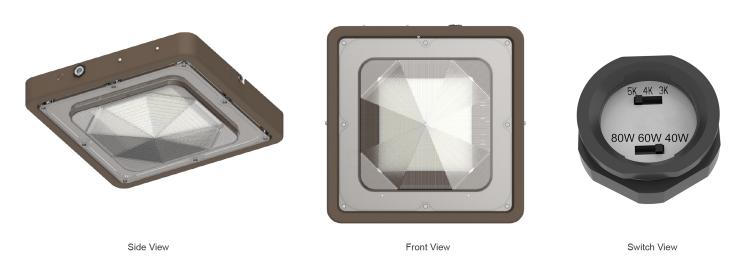

Performance Table: CXES-40-80W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CXES-40-80W-MCTP	40W 60W 80W	120~277V	5200LM 7850LM 10400LM	3000K 4000K 5000K	B2-U3-G2	130

Sample Ordering

Model	Min.	Max.Wattage Color Temp.				
CXES -	40	– 80W – MCTP				



