


FML-R6-MCT

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ | Type: \_\_\_\_\_

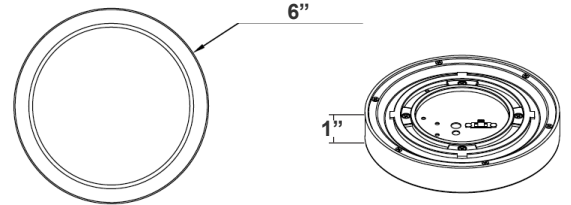

6" x 1"

Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

## Features

- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Wet Location Performance
- Multi CCT (Selectable Switch on LED Board Under the Lens)
- Die-cast Aluminum. Powder-Coated
- 5-Year Warranty
- 1" Deep

## Technical Specifications

### Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 11W
- Efficacy: 60 LPW

### Mechanical:

- White Finish
- Die-cast Aluminum. Powder-Coated
- Maximum Ambient Temperature: 104°F

### Lighting:

- Lens: White translucent acrylic lens
- LED: Edge Lit LED Technology
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 660LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Multi CCT (Selectable Switch on LED Board Under the Lens)
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 hrs

### Applications:



- Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

### Other Models:


• 14W | 840LM | FML-R8-MCT • 17W | 1020LM | FML-R10-MCT • 26W | 1560LM | FML-R14-MCT • 30W | 2100LM | FML-R18-MCT • 45W | 2700LM | FML-R22-MCT



# Photometrics: FML-R6-MCT



BUG Rating: B0-U1-G0

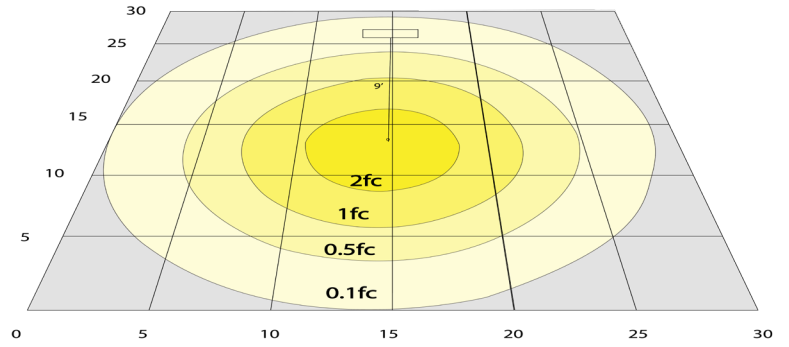


Simulation Based on 4000K Area 30'x 30' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: FML-R6-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FML-R6-MCT	11W	120V	660LM	3000K/ 4000K/ 5000K	B0-U1-G0	60

## Sample Ordering

-  -

### Accessory:

Blank = No Option For Accessories

FML-R6-TRM-BK = 6" ROUND TRIM FOR FML-R6 SERIES, BLACK FINISH

FML-R6-TRM-BN = 6" ROUND TRIM FOR FML-R6 SERIES, BRUSHED NICKEL FINISH

FML-R6-TRM-BR = 6" ROUND TRIM FOR FML-R6 SERIES, BRONZE FINISH

OPT-EM-DLS6 = EMERGENCY BACKUP BATTERY MOUNT IN EXTENDED BASE, 1.3" HEIGHT

### ACCESSORIES:

Optional Round Trims Fit Over the Fixture



FML-R6-TRM-BK  
BLACK FINISH



FML-R6-TRM-BN  
BRUSHED NICKEL FINISH



FML-R6-TRM-BR  
BRONZE FINISH



OPT-EM-DLS6  
MOUNT IN EXTENDED BASE

## Example:

1. FML-R6-MCT (FOR FML R6 MCT FIXTURE 120-277V)
2. FML-R6-MCT (FOR FML R6 MCT FIXTURE 120-277V)  
FML-R6-TRM-BK (6" ROUND TRIM FOR FML-R6 SERIES, BLACK FINISH)

