


LFX-MD SERIES Outdoor Lighting

LFX-MD-15-50W-MCTP-KN-BK

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

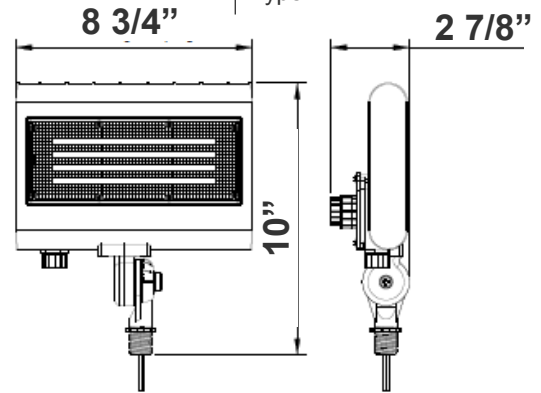

10"(H) x 8 3/4"(W) x 2 7/8"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- DLC Premium & LED High-Lumen Floor lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 70,000 Hours Rated Life
- 7-Year Warranty
- Optic Lens Type: III
- Multi-CCT Power - The Switch is on the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 10W/ 15W/ 20W/ 30W
- Power Factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze and White Finish)
- LED: Lumileds Luxeon 2835 High Flux LED
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2" Knuckle Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Multi-CCT Power - The Switch is on the Bottom of the Fixture
- Color temperature: 3000K/ 4000K/ 5000K/ 5700K
- Total Lumens: 6350LM Max
- Multi CCT: Selectable Wattages & CCTs
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

Other Models:

• 50W | 6350LM | LFX-MD-15-50W-MCTP-KN • 50W | 6350LM | LFX-MD-15-50W-MCTP-KN-WH • 50W | 6350LM | LFX-MD-15-50W-MCTP-KN-SV





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-ZB-Y6-2Z

Photometrics: LFX-MD-15-50W-MCTP-KN-BK

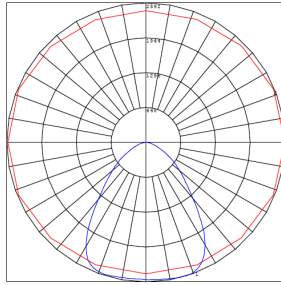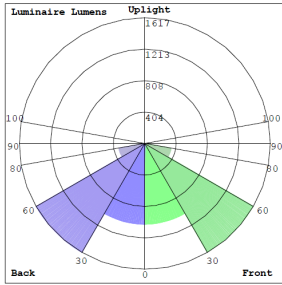

BUG Rating: B3-U0-G1

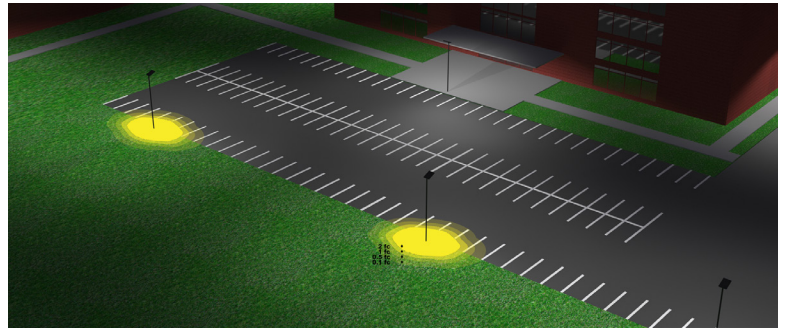

Area 45'x 155' Mounting Height: 20'


Other Views:



Side View



Front View



Back View

Performance Table: LFX-MD-15-50W-MCTP-KN-BK

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW | |
|--------------------------|---------|----------|--------|----------------------------------|------------|-----|--------|
| LFX-MD-15-50W-MCTP-KN-BK | 15W | 120~277V | 2000LM | 3000K 4000K 5000K 5700K | B3-U0-G1 | 130 | |
| | | | 2100LM | | | | |
| | | | 2180LM | | | | |
| | | | 2180LM | | | | |
| | 20W | | 2550LM | | | | |
| | | | 2620LM | | | | |
| | | | 2700LM | | | | |
| | | | 2700LM | | | | |
| | 30W | | 3800LM | | | | |
| | | | 3990LM | | | | |
| | | | 4020LM | | | | |
| | | | 4020LM | | | | |
| | | | 6250LM | | | | |
| | | | 50W | | | | 6320LM |
| | | | | | | | 6320LM |
| 6320LM | | | | | | | |
| 6350LM | | | | | | | |



Sample Ordering

| Model | Size | Min.Wattage | Max.Wattage | Color Temp. | Mount | Housing |
|-------|------|-------------|-------------|-------------|-------|---------|
| LFX | MD | 15 | 50W | MCTP | KN | BK |

Accessories Options

Blank = No Option For Accessories

WRC-3-BRZ =Weatherproof cover with three(3) 1/2" hubs

ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ
Weatherproof cover with
Three
(3) 1/2" hubs
(Can be painted)



B-41
(Can be painted)



Mounts to landscape
post
or any 1/2" hub



Fully adjustable 1/2"
threaded knuckle for aiming
versatility

Color Options: Custom Color Available

Black Silver White **Dark Bronze** Green Red Yellow
Default color



Example:

1. LFX-MD-15-50W-MCTP-KN-BK

(For LFX 15-50W MCTP fixture 120V-277V)

2. LFX-MD-15-50W-MCTP-KN-BK
WRC-3-BRZ

(For LFX 15-50W MCTP fixture 120V-277V)
(Weatherproof cover with three(3) 1/2" hubs)

