


LFX-SM SERIES Outdoor Lighting

LFX-SM-10-30W-MCTP-KN-SV




Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

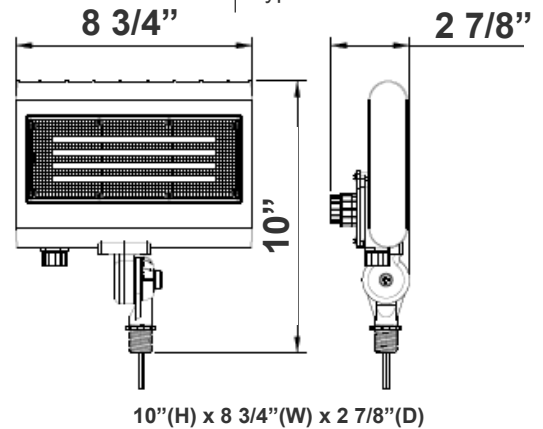

Features

- DLC Premium & LED High-Lumen Floor lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 7-Year Warranty
- 70,000 Hours Rated Life
- Optic Lens Type: III
- Multi-CCT Power - The Switch is on the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 10W/ 15W/ 20W/ 30W
- Power Factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Silver Finish)
- LED: Lumileds Luxeon 2835 High Flux LED Solid
- State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2" Knuckle Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Multi-CCT Power - The Switch is on the Bottom of the Fixture
- Total Lumens: 3900LM Max.
- Color Temperature: 3000K/ 4000K/ 5000K/ 5700K
- Color Rendering Index: ≥ 82
- Beam Angle: 120° X 90°

Applications:



- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

Other Models:


• 30W | 3900LM | LFX-SM-10-30W-MCTP-KN-WH • 30W | 3900LM | LFX-SM-10-30W-MCTP-KN • 30W | 3900LM | LFX-SM-10-30W-MCTP-BK



Photometrics: LFX-SM-10-30W-MCTP-KN-SV

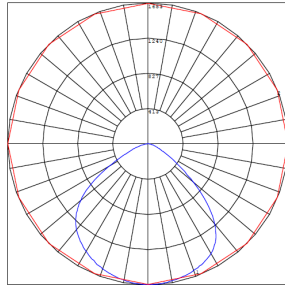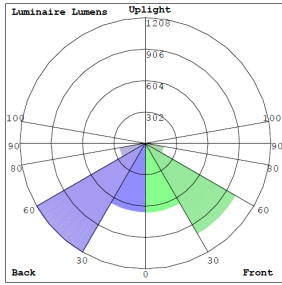

BUG Rating: B2-U0-G1

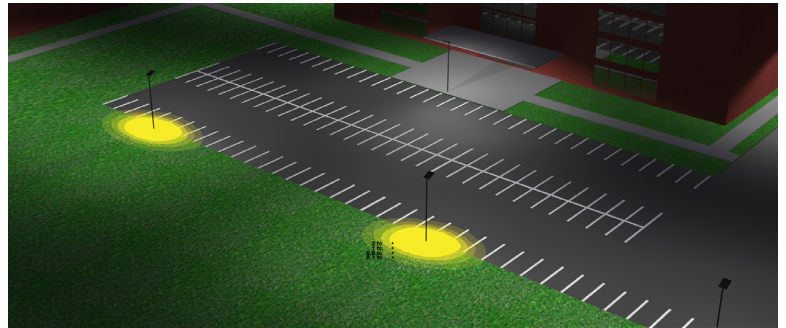

Area 40'x 50' Mounting Height: 20'


Other Views:



Side View



Front View

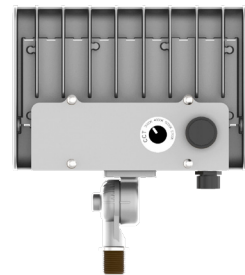

Back View

Performance Table: LFX-SM-10-30W-MCTP-KN-SV

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|--------------------------|---------|----------|--------|----------------------------------|------------|-----|
| LFX-SM-10-30W-MCTP-KN-SV | 10W | 120~277V | 1210LM | 3000K 4000K 5000K 5700K | B2-U0-G1 | 130 |
| | | | 1250LM | | | |
| | | | 1280LM | | | |
| | 15W | | 1800LM | | | |
| | | | 1880LM | | | |
| | | | 1930LM | | | |
| | 20W | | 1930LM | | | |
| | | | 2340LM | | | |
| | | | 2400LM | | | |
| | | | 2500LM | | | |
| | | | 2500LM | | | |
| | | | 3830LM | | | |
| | 30W | | 3880LM | | | |
| | | | 3880LM | | | |
| | | | 3900LM | | | |



Sample Ordering

Model **Size** **Min.Wattage** **Max.Wattage** **Color Temp.** **Mount** **Housing**
 LFX - SM - 10 - 30W - MCTP - KN - SV

Accessories Options

Blank = No Option For Accessories

WRC-3-BRZ =Weatherproof cover with three(3) 1/2" hubs

ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ
Weatherproof cover with
Three
(3) 1/2" hubs
(Can be painted)



B-41
(Can be painted)



Mounts to landscape
post
or any 1/2" hub



Fully adjustable 1/2"
threaded knuckle for aiming
versatility

Color Options: Custom Color Available

Black Silver White **Dark Bronze** Green Red Yellow
Default color



Example:

1. LFX-SM-10-30W-MCTP-KN-SV

(For LFX 10-30W MCTP fixture 120V-277V)

2. LFX-SM-10-30W-MCTP-KN-SV
WRC-3-BRZ

(For LFX 10-30W MCTP fixture 120V-277V)
(Weatherproof cover with three(3) 1/2" hubs)

