


LFX-SM SERIES Outdoor Lighting

LFX-SM-10-30W-MCTP-KN




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

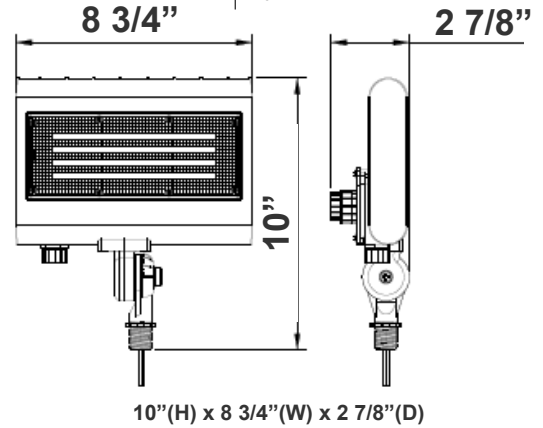

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- DLC Premium & LED High-Lumen Flood lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 70,000 Hours Rated Life
- 7-Year Warranty
- Optic Lens Type: III
- Multi-CCT Power - The Switch is on the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 10W/ 15W/ 20W/ 30W
- Power Factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze and White Finish)
- LED: Lumileds Luxeon 2835 High Flux LED Solid
- State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2" Knuckle Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Multi-CCT Power - The Switch is on the Bottom of the Fixture
- Total Lumens: 3900LM Max.
- Color Temperature: 3000K/ 4000K/ 5000K/ 5700K
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°

Applications:



- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

Other Models:


- 30W | 3900LM | LFX-SM-10-30W-MCTP-KN-WH



Photometrics: LFX-SM-10-30W-MCTP-KN

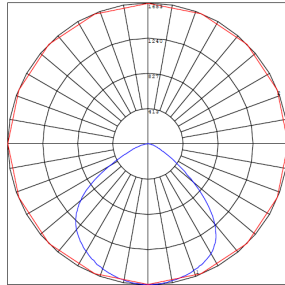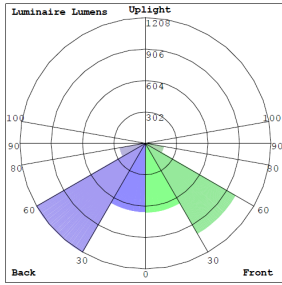

BUG Rating: B2-U0-G1

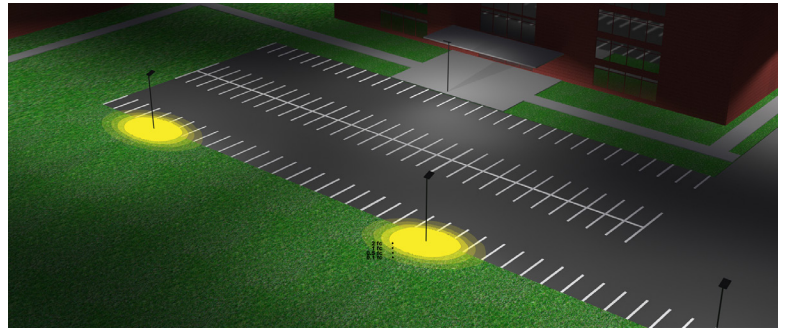

Area 40'x 50' Mounting Height: 20'


Other Views:



Side View



Front View

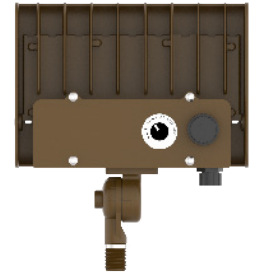

Back View

Performance Table: LFX-SM-10-30W-MCTP-KN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW	
LFX-SM-10-30W-MCTP-KN	10W	120~277V	1210LM	3000K 4000K 5000K 5700K	B2-U0-G1	130	
			1250LM				
			1280LM				
			1280LM				
			1800LM				
	15W		1880LM				
			1930LM				
			1930LM				
			2340LM				
			2400LM				
	20W		2500LM				
			2500LM				
			3830LM				
			30W				3880LM
							3880LM
3880LM							
3900LM							



Sample Ordering

Model	Size	Min.Wattage	Max.Wattage	Color Temp.	Mount
LFX	SM	10	30W	MCTP	KN

Accessories Options

Blank = No Option For Accessories

WRC-3-BRZ =Weatherproof cover with three(3) 1/2" hubs

ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ
Weatherproof cover with
Three
(3) 1/2" hubs



B-41



Mounts to landscape
post
or any 1/2" hub



Fully adjustable 1/2"
threaded knuckle for aiming
versatility

Color Options: Custom Color Available

Black Silver White Dark Bronze Green Red Yellow
Default color



Example:

1. LFX-SM-10-30W-MCTP-KN

(For LFX 10-30W MCTP fixture 120V-277V)

2. LFX-SM-10-30W-MCTP-KN
WRC-3-BRZ

(For LFX 10-30W MCTP fixture 120V-277V)
(Weatherproof cover with three(3) 1/2" hubs)

