

LRS SERIES Outdoor Lighting

LRS-F-MCT-C90-MGBR


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Customer Name: _____

Project Name: _____

Note: _____ Type: _____

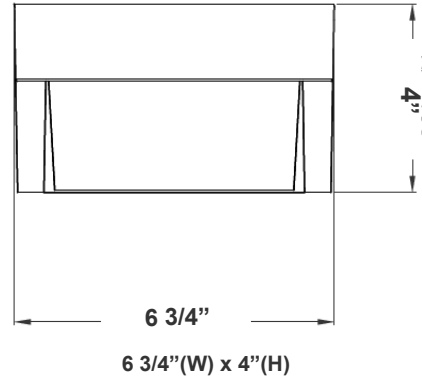

LED Non-Cutoff Wall Pack with Photocell is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 12W
- Power Factor: >0.90
- Efficacy: 54 LPW

Mechanical:

- Back plate: Die-Cast Aluminum with Mounting/Gasket Installed
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP44

Lighting:

- LED Type/Brand: SMD 3030/ Philips Lumileds LEDs
- Total Lumens: 650LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

Applications:

- Ideal for general site lighting, loading docks, doorway, pathway and parking areas.

Other Models:

- 12W | 650LM | LRS-F-MCT-C90-WH
- 12W | 650LM | LRS-F-MCT-C90-BK




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-ZY-29-2Z

Photometrics: LRS-F-MCT-C90-MGBR

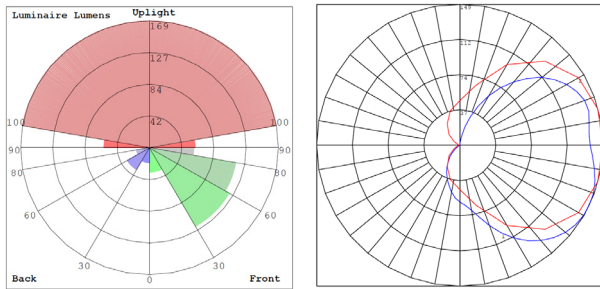

BUG Rating: B0-U3-G1

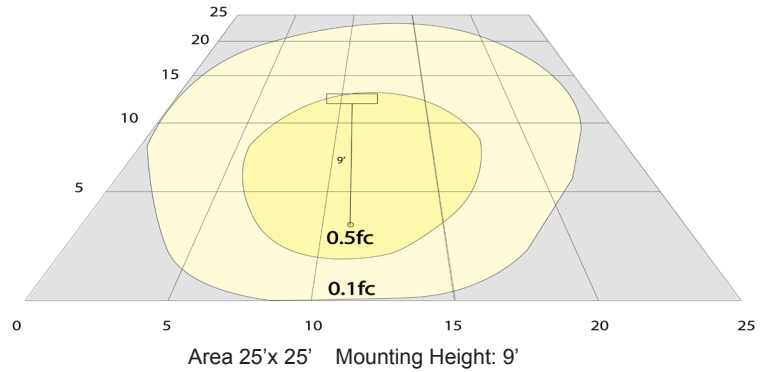

Other Views:



Side View



Front View



Back View

Performance Table: LRS-E-MCT-C90-MGBR

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|--------------------|---------|---------|--------|-------------------------|------------|-----|
| LRS-F-MCT-C90-MGBR | 12W | 120V | 650LM | 3000K 4000K 5000K | B0-U3-G1 | 54 |

Sample Ordering

| Model | Color Temp. | CRI | Housing |
|----------------------------|-------------|-----|---------|
| LRS - F - MCT - C90 - MGBR | | | |

Other Models:



LRS-F-MCT-C90-BK



LRS-F-MCT-C90-WH

