

# WAX SERIES

Outdoor Lighting

# WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

WAX-50-80W-MCTP


**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

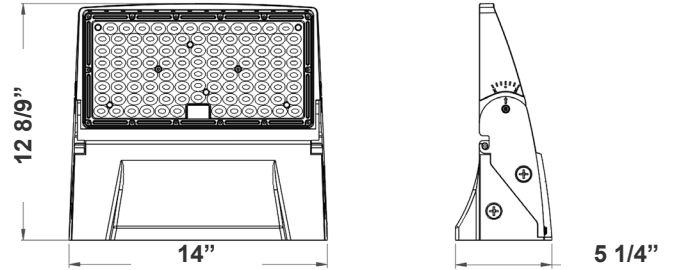

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors or another instant on/off controls.

**14" (W) x 12 8/9" (H) x 5 1/4" (D)**

## Features

- High Light Transmittance, Anti-UV and Fire Resistant PC Lens
- Two 1/2" Knockouts on Each Side
- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- 7-Year Warranty
- Multi CCT and Power (Switches are inside fixture)

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 50W/65W/80W
- Power Factor: >0.9
- THD: <20%
- Efficacy: 140 LPW

### Mechanical:

- Die-Cast Aluminum With Powder Coat Finish
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- DC Button Photocell with ON/OFF switch Included
- Light Head Can Be Adjusted From 0° to 90°
- Full Cutoff, Dark Sky Compliant
- Two 1/2" Knockouts on Each Side
- Operating Temperature: -40°F -113°F
- 7-Year Warranty
- IP65, Suitable For Wet Location

### Lighting:

- Dimming: 0~10V Dimmable
- Multi CCT and Power (Switches are inside fixture)
- Lumileds 2835, High CRI.
- Total Lumens: 11200LM Max
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: H127° x V85°
- Rated life: 70,000 Hrs

### Applications:

- Entrance Lighting
- Courtyard Lighting
- Industrial Lighting
- Outdoor Landscape Lighting
- Building The hotel
- Wall Lighting Area And So On

### Other Models:

- 120W | 15600LM | WAX-90-120W-MCTP

- 40W | 5600LM | WAX-20-40W-MCTP





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |




WG-ZY-24-2Z

## Photometrics: WAX-50-80W-MCTP

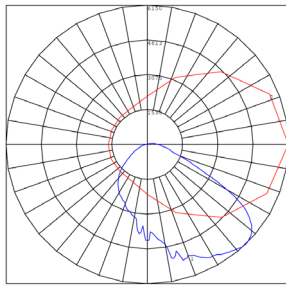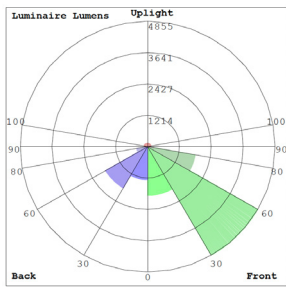

BUD Rating: B3-U3-G3

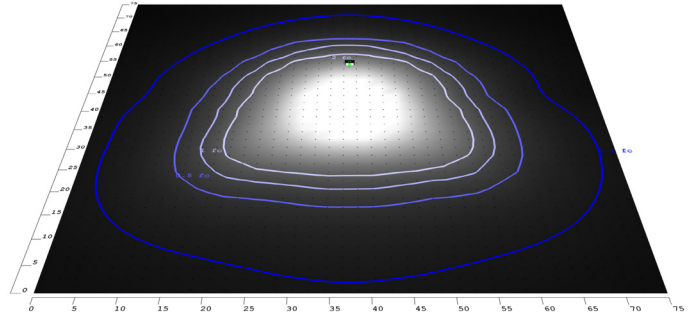

Area 75'x 75' Mounting Height: 8'

## Other Views:



Side View



Front View



Back View

## Performance Table: WAX-50-80W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WAX-50-80W-MCTP	50W	120~277V	7000LM	3000K 4000K 5000K	B3-U3-G3	140
	65W		9100LM			
	80W		11200LM			

## Sample Ordering

Model Min. Wattage Color Temp.

WAX - 50 - 80W - MCTP

## Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-OD3INT = INTERNAL EMERGENCY BACK UP BATTERY

OPT-SEN-3MRLV-5 = PROGRAMMABLE MICROWAVE SENSOR

OPT-WP-480V = CHANGE VOLTAGE TO 480V

## FACTORY-INSTALLED OPTION:



OPT-EM-OD3INT



OPT-SEN-3MRLV-5




**COLOR CHART:** \* Choose from one of our Premium Colors with no set-up fee.

**Gloss:**



**Hammer:**

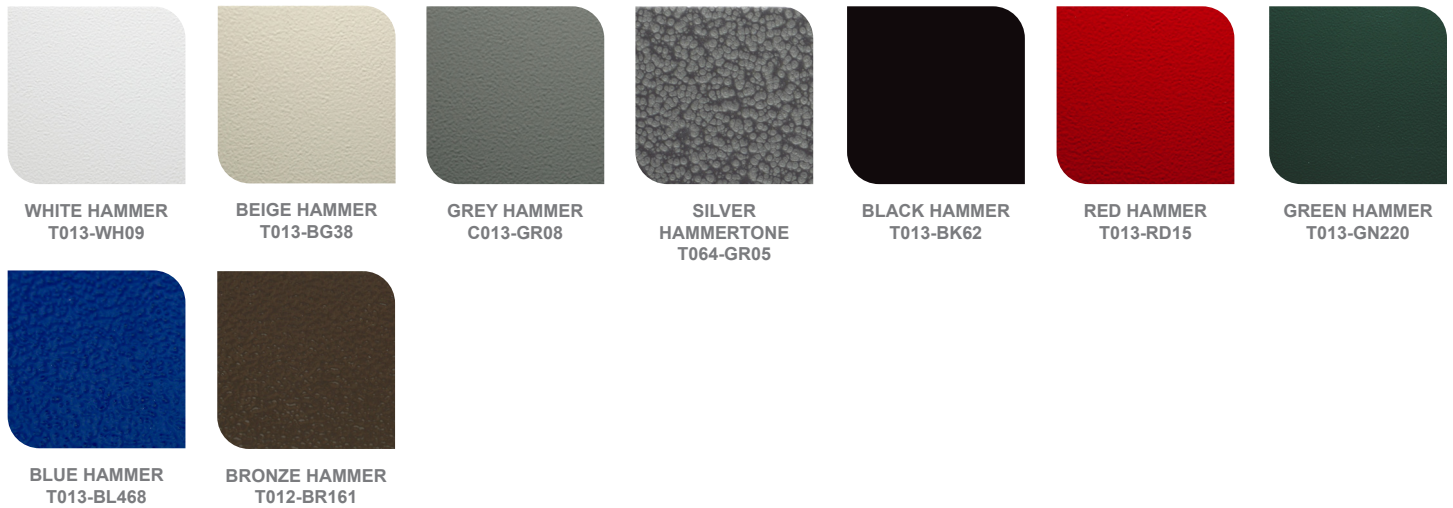

**Texture:**



**Vein:**

