


# Garage Lighter



65W

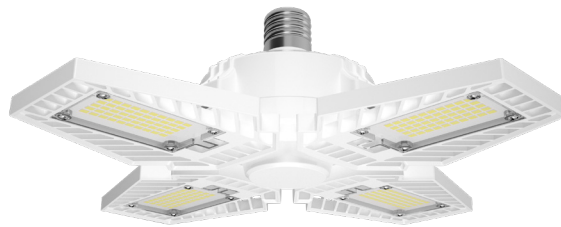

80W

PROJECT: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

PREPARED BY: \_\_\_\_\_



## KEY FEATURES

- Replaces traditional metal halide or high pressure sodium HID lamp
- Adjustable LED panels for custom beam angle
- Integral driver enables lamp to be wired directly to line voltage without need for an external driver or ballast
- Rated for use in open fixtures in dry or damp locations
- 25,000-Hour lifespan
- Environmentally friendly, no mercury used
- UL Listed
- Non-dimmable
- 3-Year, No-Compromise Warrant

## Economical Garage and HID Retrofit



## PERFORMANCE

Catalog Number	Equivalency	Input Wattage	Lumens (Nominal)	Efficacy lm/W	Base	Color Temperature	CRI	L70 Lifespan
HID-65-V-E26-850-BYP-GL	200W	65W	8,000	125	E26	5000K	80	25,000
HID-80-V-E26-850-BYP-GL	250W	80W	10,000	125	E26	5000K	80	25,000

## TECHNICAL SPECIFICATIONS

### CONSTRUCTION

<b>Product Type</b> HID	<b>Base Type</b> E26
<b>Bulb Shape</b> Adjustable	<b>Beam Angle</b> 120°-270° adjustable
<b>Enclosure Material</b> Aluminum	
<b>Endcap Finish</b> Polycarbonate	

### ELECTRICAL

<b>THD</b> 20%
<b>Power Factor</b> >0.9
<b>Input Voltage</b> 120-277V
<b>Operating Frequency</b> 50/60Hz
<b>Operating Temperature</b> -31°F to 104°F (-35°C to 40°C)

**Note**  
All values are typical (tolerance +/- 10%)

## TECHNICAL SPECIFICATIONS (CONT.)

### INSTALLATION

**Installation Method**

UL Type B, Ballast Bypass

**Burning Position**

Vertical

### COMPLIANCE

**Safety Listing**

UL Listed

**Environment/Fixture Rating**

Damp / Open

**FCC**

Complies with Part 15 of the FCC Rules.

**RoHS**

Mercury and UV free. RoHS-compliant components.

### OTHER

**Warranty**


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## DIMENSIONS


### 65W Garage lighter

Weight: 1.38 lbs

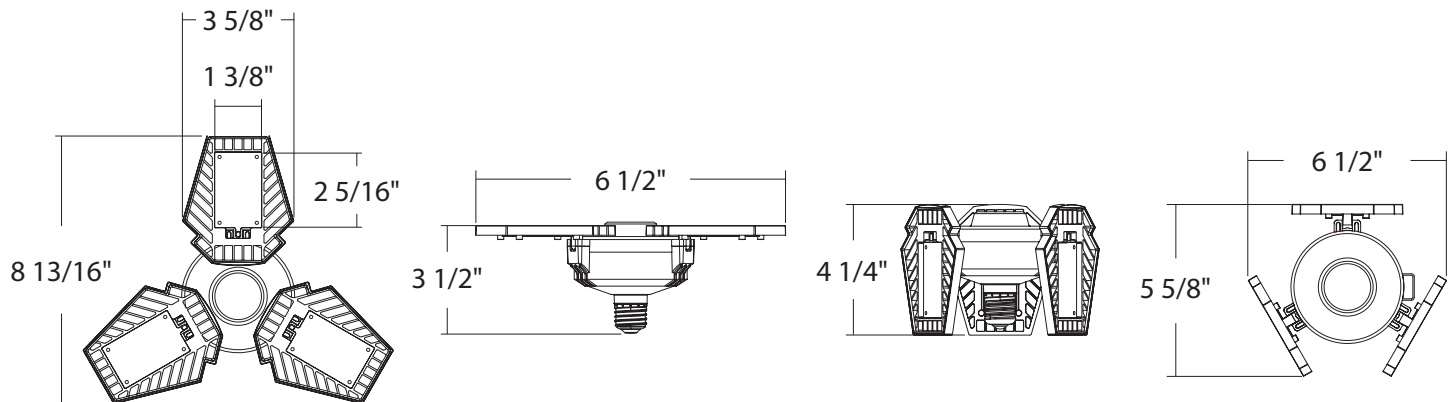

### 80W Garage lighter

Weight: 1.65 lbs

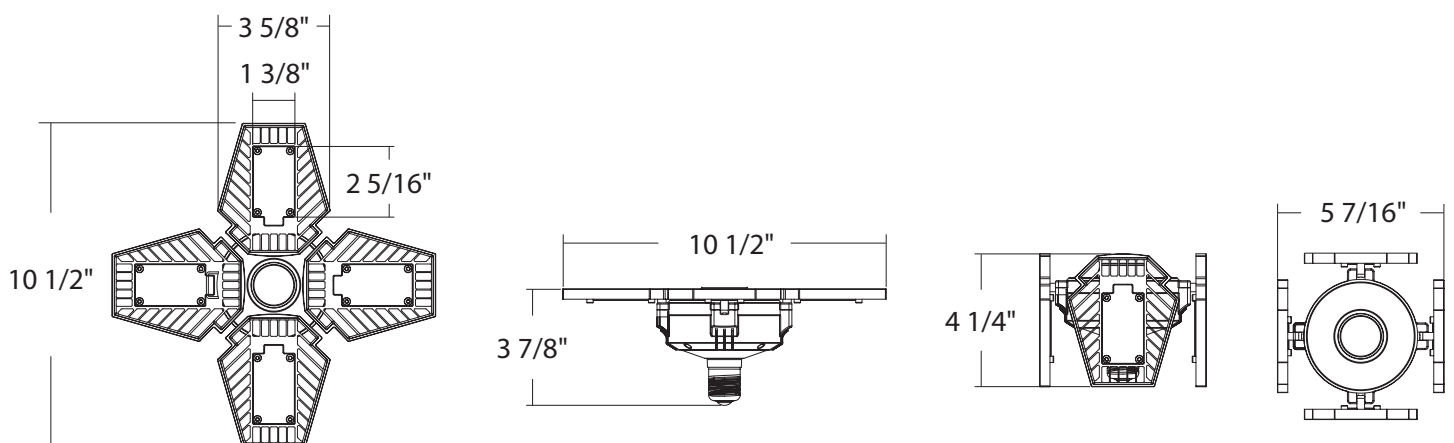

# Garage Lighter



## ORDERING INFO

Catalog Number	Model Number	UPC	Case Pack
HID-65-V-E26-850-BYP-GL	H10096(HID-65-V-E26-850-BYP-GL)	192552012461	12
HID-80-V-E26-850-BYP-GL	H10100(HID-80-V-E26-850-BYP-GL)	192552012478	12

## ORDERING MATRIX

Family	Wattage	Orientation	Base Type	CRI/Color Temp	Installation Type	Lamp Type
HID	-	-	-	850	-	-
	80 80W 65 65W	V Vertical	E26 E26 Base	850 80 CRI, 5000K	BYP Ballast Bypass	GL Garage Lighter