

# CXER SERIES OUTDOOR LIGHTING

CXER-40-80W-MCTP-SR-EM-WH  
ROUND NEW CONCEPT GARAGE AND CEILING LIGHTS  
WITH EMERGENCY BACKUP BATTERY

**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)



Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting.


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

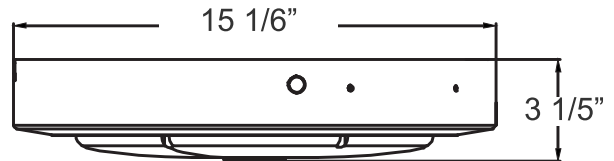

15 1/6" (W) X 3 1/5" (H)

## Features

- Stamped Galvanized Steel With Prismatic Polycarbonate Lens Redesigned For LED
- Designed for 9 to 16 Foot Mounting Heights
- Factory-Installed Options: Battery Backup, Motion Sensor
- 7-year Warranty

## Technical Specification

### Electrical:

- Wattage: 40W/60W/80W
- Input Current: 0.6A MAX
- Input Voltage: 120-277VAC 50/60Hz
- Power Factor: >0.90
- LPW: 135LPW

### Mechanical:

- Stamped Galvanized Steel
- Twist-Lock Zhaga Socket Pre-Installed. See Motion Sensor Accessories
- Four 1/2" Threaded Hubs Located On Four Sides Of The Housing
- Prismatic Polycarbonate Lens
- Lifespan: 70000 Hrs
- Operating Temperature: -40°F ~ 104°F
- Suitable For Damp Locations
- 7-year Warranty

### Emergency Battery Backup Spec:

- Output Power: 8W
- Output Voltage: 48V
- Li-Ion Battery / >90 Minutes Emergency Operation
- Test Button Installed on The Side of The Fixture

### Lighting:

- MCTP: Multi-CCT and Power Switch Is In The Fixture
- Dimming: 0~10V Dimmable
- LED Type/ Brand: LUMILEDS 2835LED
- Total Lumens: 10800LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: 150°
- Lifespan: 70000 Hrs

### Applications:

- Indoor Parking
- Commercial Buildings
- School
- Warehouses
- Complexes
- Apartment
- Garage

### Other Models:




- 50W | 6750LM | CXER-30-50W-MCTP-SR-EM-WH



Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |



## Photometrics: CXER-40-80W-MCTP-SR-EM-WH

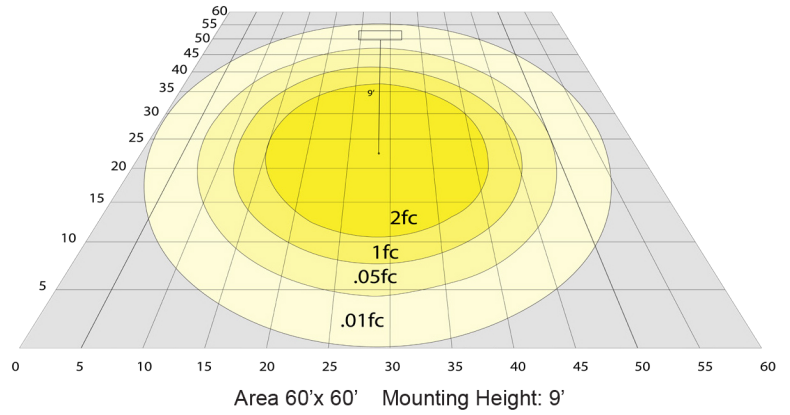


BUD Rating: B2-U3-G2

Area 60'x 60' Mounting Height: 9'

## Other Views:



Side View

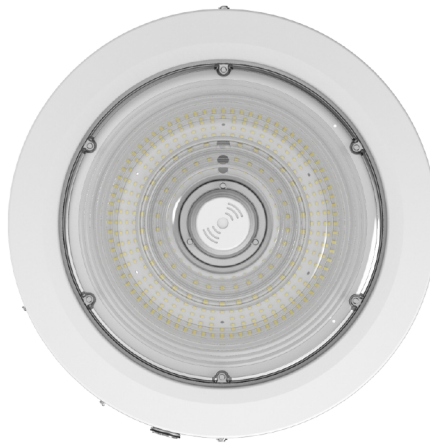

Front View



Switch View

## Performance Table: CXER-40-80W-MCTP-SR-EM-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CXER-40-80W-MCTP-SR-EM-WH	40W 60W 80W	120~277V	5400LM 8100LM 10800LM	3000K 4000K 5000K	B2-U3-G2	135

## Sample Ordering

Model	Min.	Max.Wattage	Color Temp.	Sensor	Battery	Housing
CXER	40	80W	MCTP	SR	EM	WH

### Accessory:

Blank = No Option For Accessories  
 WEC-3PR-72-TLB-WH = 600W Max, ZHAGA 12-24VDC PIR SENSOR, WHITE, WITH BASE  
 (OPTIOANL REMOTE COTROL WEC-3RC)

### Accessory:



WEC-3PR-72-TLB-WH

