# CXER SERIES OUTDOOR LIGHTING

#### CXER-40-80W-MCTP-SR-WH

ROUND NEW CONCEPT GARAGE AND CEILING LIGHTS






Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting.

# WESTGATE THE FUTURE IS HERE... AND IT'S QUITE BRIGHT!

| Customer Name: |       |
|----------------|-------|
| Project Name:  |       |
| Note:          | Type: |



15 1/6" (W) X 3 1/5"(H)

# **Features**

- Stamped Galvanized Steel With Prismatic Polycarbonate Lens Redesigned For LED
- Designed for 9 to 16 Foot Mounting Heights

- Factory-Installed Options: Battery Backup, Motion Sensor
- 7-year Warranty

# **Technical Specifications**

#### **Electrical:**

Wattage: 40W/60W/80WInput Current: 0.6A MAX

Input Voltage: 120-277VAC 50/60Hz

Power Factor: >0.90
 LPW: 135LPW

#### Mechanical:

- Stamped Galvanized Steel
- Twist-Lock Zhaga Socket Pre-Installed. See Motion Sensor Accessories
- Four 1/2" Threaded Hubs Located On Four Sides Of The Housing
- Prismatic Polycarbonate Lens
- Lifespan: 70000 Hrs
- Operating Temperature: -40°F ~ 104°F
- Suitable For Damp Locations
- 7-year Warranty

### **Lighting:**

- MCTP:Multi-CCT and Power Switch Is In The Fixture
- Dimming: 0~10V Dimmable
- LED Type/ Brand: LUMILEDS 2835LED
- Total Lumens: 10800LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: 150°Lifespan: 70000 Hrs

### Applications:

- Indoor Parking
- Commercial Buildings
- School
- Warehouses
- Complexes
- Apartment
- Garage

#### Other Models:

• 50W | 6750LM | CXER-30-50W-MCTP-SR-WH













# Photometrics: CXER-40-80W-MCTP-SR-WH Luminaire Lumens



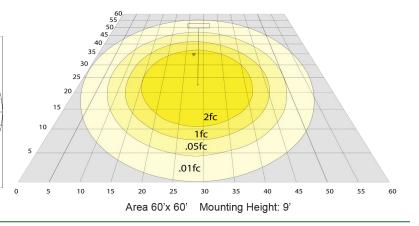

#### Other Views:







Side View

Front View

Switch View

## Performance Table: CXER-40-80W-MCTP-SR-WH

| MODEL NO.              | Wattage           | Voltage  | Lumens                      | Color Temp.             | BUG Rating | LPW |
|------------------------|-------------------|----------|-----------------------------|-------------------------|------------|-----|
| CXER-40-80W-MCTP-SR-WH | 40W<br>60W<br>80W | 120~277V | 5400LM<br>8100LM<br>10800LM | 3000K<br>4000K<br>5000K | B2-U3-G2   | 135 |

# Sample Ordering

| Model  | Min. | M | Max.Wattage Color Temp. |   |      |   | Sensor |   | Housing |   |
|--------|------|---|-------------------------|---|------|---|--------|---|---------|---|
| CXER - | 40   | _ | 80W                     | - | MCTP | _ | SR     | _ | WH      | ] |

### **Accessory:**

Blank = No Option For Accessories

WEC-3PR-72-TLB-WH = 600W Max, ZHAGA 12-24VDC PIR SENSOR, WHITE, WITH BASE (OPTIOANL REMOTE COTROL WEC-3RC)

#### Accessory:



WEC-3PR-72-TLB-WH





